

Model-predicted drawdown and mounding in the Shepparton Formation and LPS 100 years after cessation of groundwater-affecting activities are presented in Figure 6.13 and Figure 6.14. These demonstrate that drawdown impacts in the two aquifers are very similar after such a long period. Both have residual drawdown and mounding of up to 1 m at West Balranald and the off-path wellfield respectively. No residual impact of dewatering at Nepean is evident. Whilst the magnitude of drawdown has reduced substantially by this time, the extent of the 0.2 m contour has expanded outward towards, but not to, the Murrumbidgee River. However, as mentioned earlier, there is no predicted increase in leakage to or from the Murrumbidgee and Murray Rivers.

Given the longevity of drawdown impacts resulting from West Balranald, several attempts were made to mitigate drawdown immediately following cessation of backfilling. These focussed on pumping water from the centre of the off-path injection wellfield back to the northern-most 3 km of the West Balranald deposit, where wells used for dewatering could be readily converted for operation as injection wells. A constraint was applied that, during mitigation injection, heads could not rise to within 3 m of the final backfill elevation (52 mAHD) in the residual pit void. This criterion of 49 mAHD meant that injection rates were highly constrained, in fact injection rates as low as 20 L/s were not possible and, hence, no dedicated drawdown mitigation is planned. In practice, the optimisation of dewatering and injection on-path is expected to firstly reduce dewatering volumes and, secondly, lead to much greater injection on-path such that drawdown is largely mitigated during mining. This would also lead to reduced mounding impacts at the off-path injection wellfield.

6.7 Groundwater users

6.7.1 Groundwater dependent ecosystems

An assessment of impacts on potential groundwater-dependent ecosystems (GDEs) has been carried out (CDM Smith, 2015). The groundwater modelling carried out in this study provides inputs to that assessment. Along with spatial datasets of model-predicted drawdown and mounding impacts on the water table, a series of hydrographs at selected sites of potential GDEs has been requested. Model-predicted hydrographs for sites GDE1 to GDE8 and WBMW022 are presented in Appendix F.

6.7.2 Third party wells

EMM is carrying out a water impact assessment, for which modelled groundwater impacts also forms an input. A series of hydrographs at third party wells has been requested for that study. Data on the third party wells was provided by OW. Details of the wells along with model-predicted hydraulic heads for each of them are provided in Appendix G.



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation 100 years post-mining **Figure 6.13**

I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_21250101_L1_DD.mxd



- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain

GDA 1994 MGA Zone 54



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore 100 years post-mining **Figure 6.14**



I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_21250101_L3_DD.mxd

7. Predictive Uncertainty Analysis

Due to their inherent nature as simplified representations of a complex continuous world, all models are “wrong”. The purpose of an uncertainty analysis is to determine how “wrong” a given model prediction may be. That is, the realm of plausible predictions is explored such that a range of outcomes is identified, rather than a single prediction.

Many aspects of a model contribute to the uncertainty associated with a prediction. The available data, conceptual model, spatial and temporal discretisation, adopted parameter values and modelling software all contribute to the “error” in a prediction.

7.1 Methodology

Some aspects of the uncertainty associated with a model prediction are difficult to quantify. The approach taken here is to carry out an uncertainty analysis based on a plausible range of key aquifer properties. Aspects such as alternative conceptualisations, discretisation and software are not considered.

Two sets of alternative parameter values are defined such that they would provide a “high dewatering” case and a “low dewatering” case. The parameter values adopted were selected based on results of the calibration sensitivity analysis and in consultation with Iluka’s Hydrogeology Department.

In the high dewatering case parameter values were selected that were thought to create a more demanding dewatering operation and also that would pose the greatest risk to disposal via injection. It was anticipated this would also generate more extensive and prolonged drawdown and mounding than the base case.

In the low dewatering case the opposite approach was taken, such that parameter values likely to create a less demanding dewatering operation and that would pose the least risk to disposal via injection, were selected. Consistent with the approach of the sensitivity analysis, parameter values were scaled using multipliers. The parameters and associated multipliers used to define the high dewatering and low dewatering cases are presented in Table 7.1.

Table 7.1 : Uncertainty analysis parameter values

Parameter	Base case value	High dewatering multiplier	Low dewatering multiplier
Shepparton Formation Kh (m/d)	1	2	0.2
Shepparton Formation Kv (m/d)	0.001	10	1
LPS surf zones Kh (m/d)	10 - 40	1.5	0.8
LPS non surf zones Kh (m/d)	0.012 – 0.13	2	0.5
LPS non surf zones Kv (m/d)	0.001 – 0.005	10	1
Geera Clay Kv (m/d)	1×10^{-5}	100	1
Ss (1/m)	3×10^{-5}	0.5	2
Sy (-)	0.15	1.33	0.75

Both scenarios were initially run with the base case injection rates. These preliminary model runs provided revised dewatering rates for the duration of the Project. For both cases the simulated injection rates were then revised to match their corresponding dewatering rates. The off-path injection wellfield footprint was assumed the same as for the base case. Production for make-up water supply in mine year 8 was not revised in line with the new dewatering rates. This is a minor component of the mine water balance and expected not to play a significant role in the uncertainty associated with either the operational feasibility or the predicted environmental risks posed by operation of the groundwater management plan.

7.2 Dewatering and disposal requirements

Predicted dewatering requirements for the Project are presented for the high dewatering case and low dewatering case in Figure 7.1 and Figure 7.2 respectively. Average annual dewatering rates for the base case and the two uncertainty analysis runs are shown in Table 7.2. Each of the uncertainty analysis model runs displays the same temporal trend as the base case (refer to Figure 6.11), with dewatering rates generally increasing through the period of mining West Balranald, as the pit moves northward and further below the pre-mining water table. However, the dewatering rates in the high and low dewatering cases are essentially scaled up and down from the base case values. The peak predicted dewatering rates are 2,048 L/s and 934 L/s for the high and low dewatering scenarios.

Analysis of model-predicted hydraulic heads along the West Balranald and Nepean deposits indicates that both uncertainty analysis cases successfully dewater the deposits. Therefore, it is anticipated that, even for the most difficult yet plausible set of aquifer parameter values, the West Balranald deposit could be dewatered (and excess water disposed by injection) with infrastructure capable of operating at a peak capacity of approximately 50 % more than the base case predicted rate of 1,309 L/s. Whilst the dewatering rates at Nepean are much lower than at West Balranald a similar increase in infrastructure capacity is predicted to ensure a dry pit even for the most difficult combination of aquifer parameters.

Table 7.2 : Predicted average annual dewatering uncertainty

Mine Year	Base dewatering (ML/yr)		High dewatering (ML/yr)		Low dewatering (ML/yr)	
	West Balranald	Nepean	West Balranald	Nepean	West Balranald	Nepean
1	19,546	-	31,517	-	12,412	-
2	20,435	-	33,920	-	13,782	-
3	21,346	-	37,625	-	15,093	-
4	22,421	-	37,092	-	15,792	-
5	27,004	-	45,376	-	19,000	-
6	29,461	76	49,301	136	20,922	54
7	4,730	2,300	12,659	3,326	3,867	1,415
8	183	2,295	2,417	2,592	562	1,197

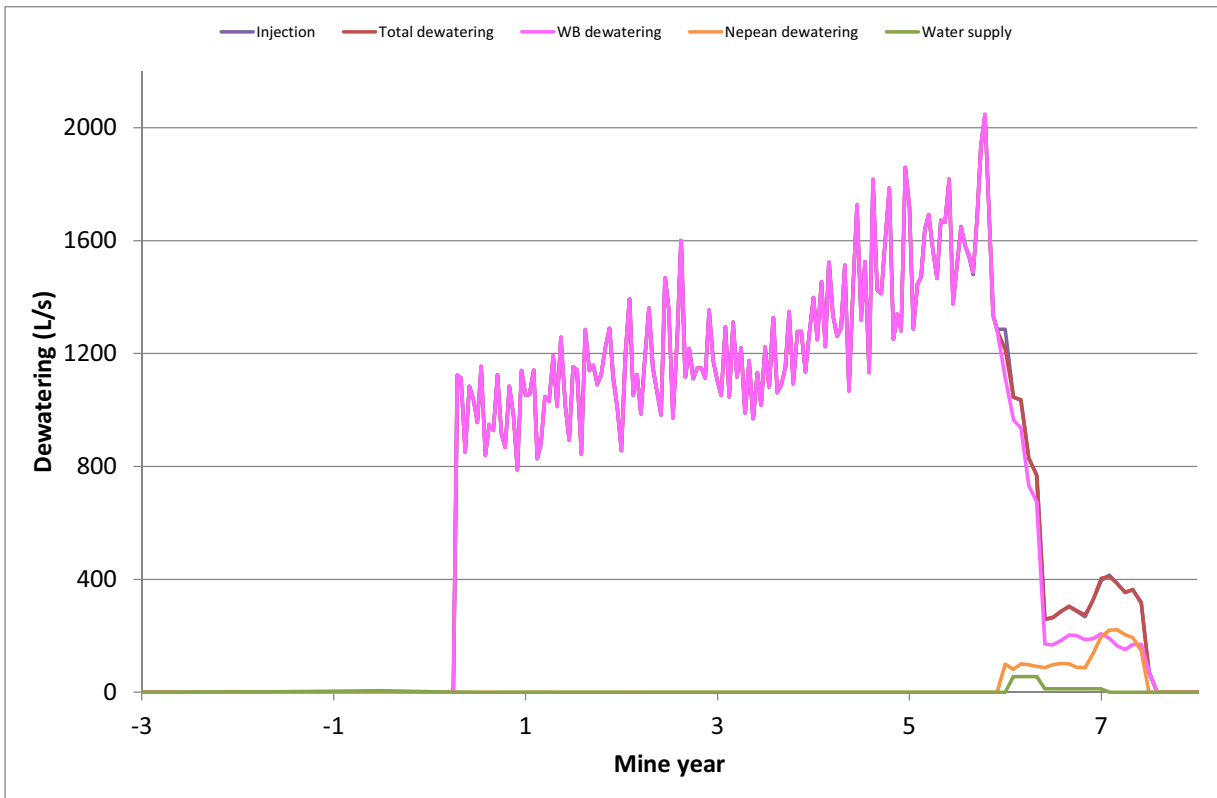


Figure 7.1 : High dewatering modelled groundwater management

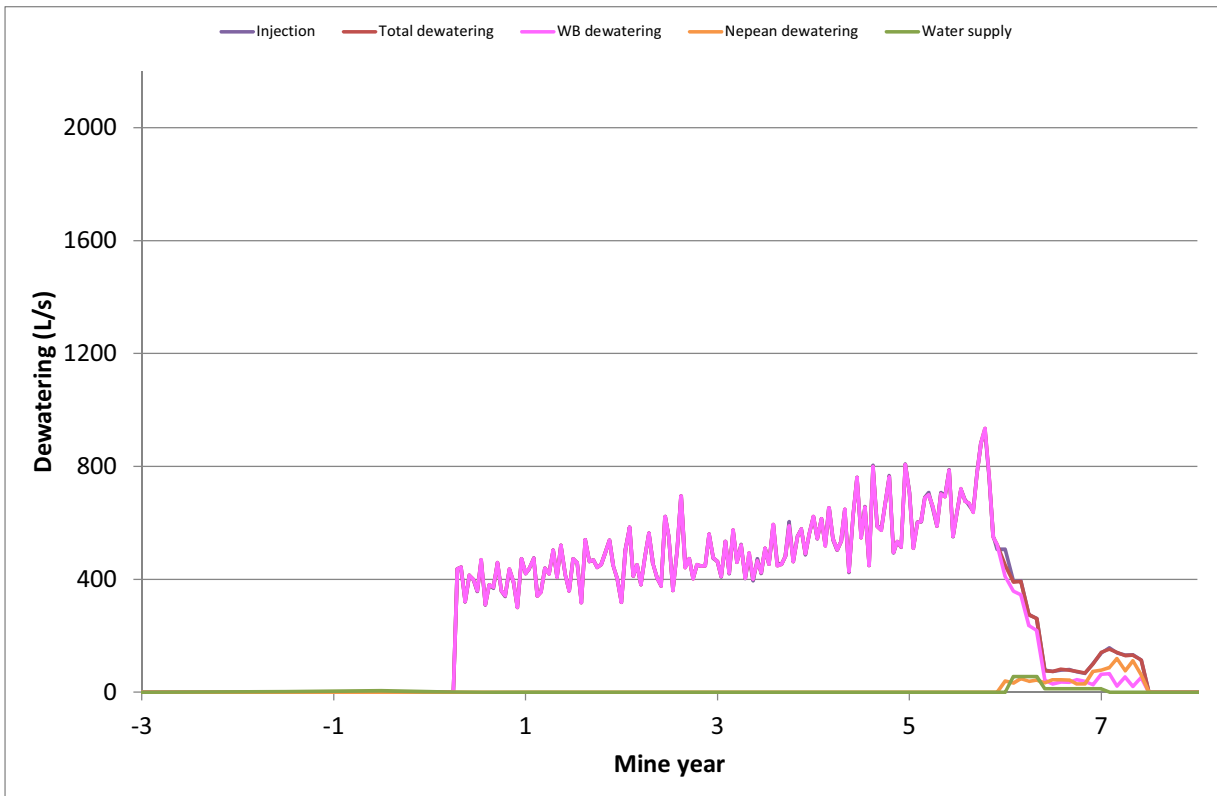


Figure 7.2 : Low dewatering modelled groundwater management

7.3 Drawdown and mounding

Predicted regional drawdown and mounding are presented spatially for the base case and two uncertainty cases in Figure 7.3 to Figure 7.11. Results are presented at the end of mining year 6 (end of mining at West Balranald), mining year 8 (end of backfilling at West Balranald) and 100 years post-mining.


At the end of mining year 6, predicted drawdown and mounding in the Shepparton Formation (Figure 7.3) and LPS1 foreshore (Figure 7.4) are remarkably similar, particularly given the significant difference in dewatering and injection rates between the high and low dewatering cases. It appears that the increased hydraulic conductivities, that are partially responsible for the increased dewatering volumes, enable rapid dispersion of injected groundwater without leading to significant increases in mounding. In fact, impacts from the base case extend further in some directions than the impacts from the two end member cases do.

Predicted drawdown impacts in the Olney Formation at the end of mining year 6 are evident only for the high dewatering case. In the base case and low dewatering case the Geera Clay acts as a sufficient barrier so as to restrict modelled impacts in the Olney Formation to less than 0.2 m. In the high dewatering case the base case Geera Clay K_v of 1×10^{-5} m/d is increased 100 times. This is probably higher than is reasonably expected, even at this much higher conductivity, drawdown and mounding is relatively localised to the West Balranald deposit and off-path injection areas and at levels not much more than 2 m.

Predicted impacts at the end of mining year 8 (refer to Figure 7.6 to Figure 7.8) are very similar in the three reported hydrostratigraphic units to those predicted at the end of mining year 6. The only notable difference is that relatively minor impacts are seen at Nepean. As at year 6, the three cases generate remarkably similar impacts and the only case for which impacts greater than 0.2 m are evident in the Olney Formation is the high dewatering case.

100 years post-mining predicted impacts are again very similar for the three cases tested (Figure 7.9 to Figure 7.11). Drawdown and, in particular, mounding extend furthest outward for the high dewatering case. As is predicted during dewatering, impacts are only predicted to reach 0.2 m in the Olney Formation for the high dewatering case.

Crucially, in all three cases, drawdown of greater than 0.2 m does not reach the Murrumbidgee or Murray Rivers. Further, the remarkable similarity of impacts predicted for the two cases that define the upper and lower bounds of anticipated plausible dewatering suggests that the degree of uncertainty associated with predicted mounding impacts is low. Whilst a little surprising, this outcome suggests that the proposed dewatering and disposal operations required to mine the West Balranald and Nepean deposits can be accommodated within the existing dewatering and injection strategy without adverse environmental impacts.

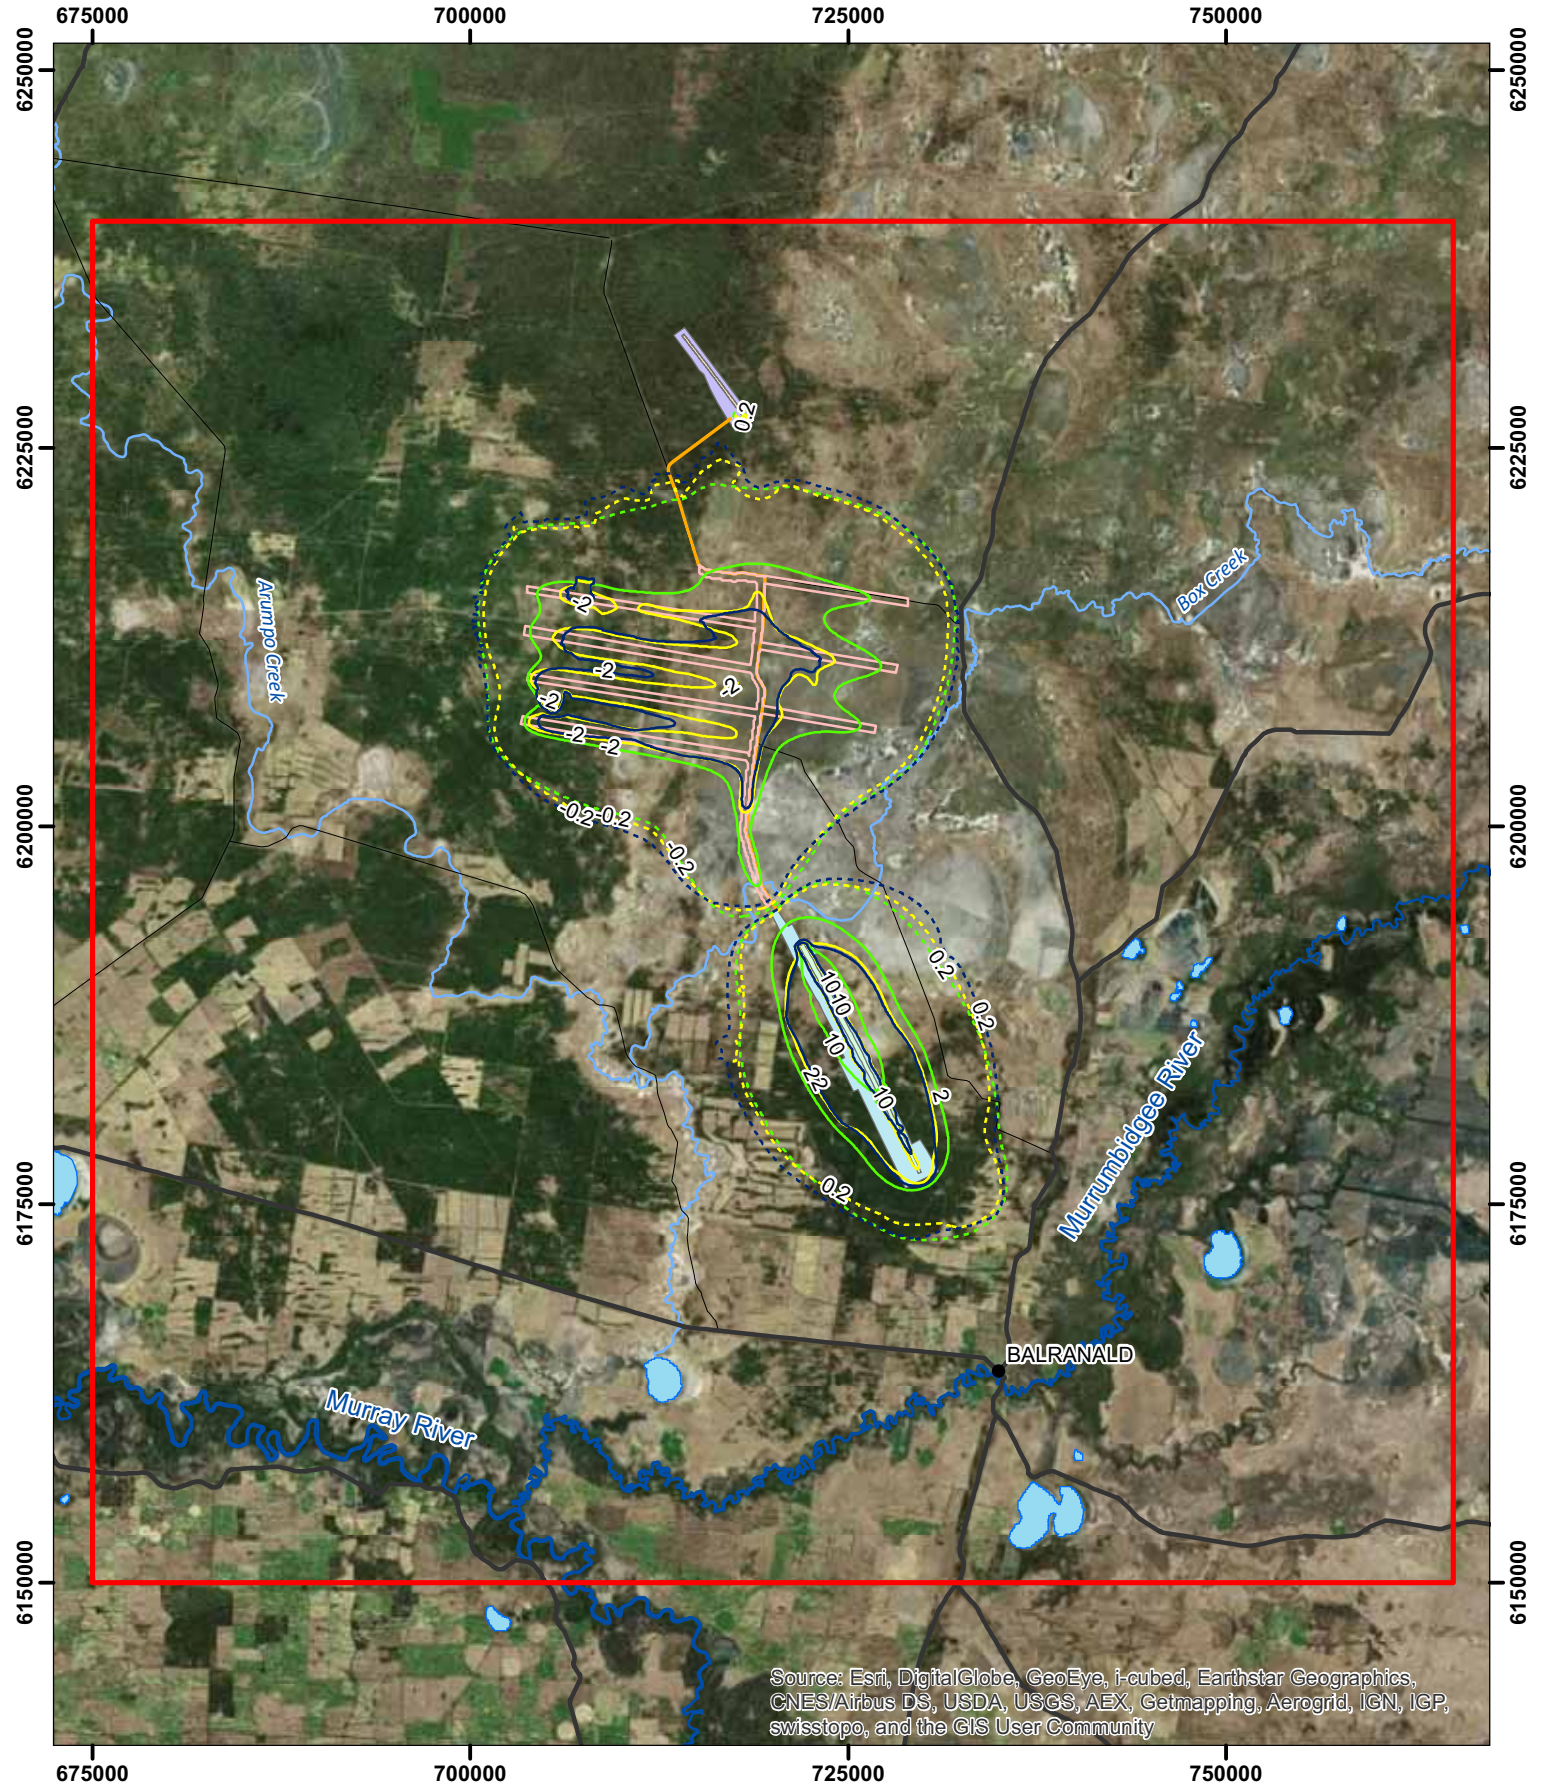


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 drawdown uncertainty analysis in Shepparton Formation at mining year 6 **Figure 7.3**

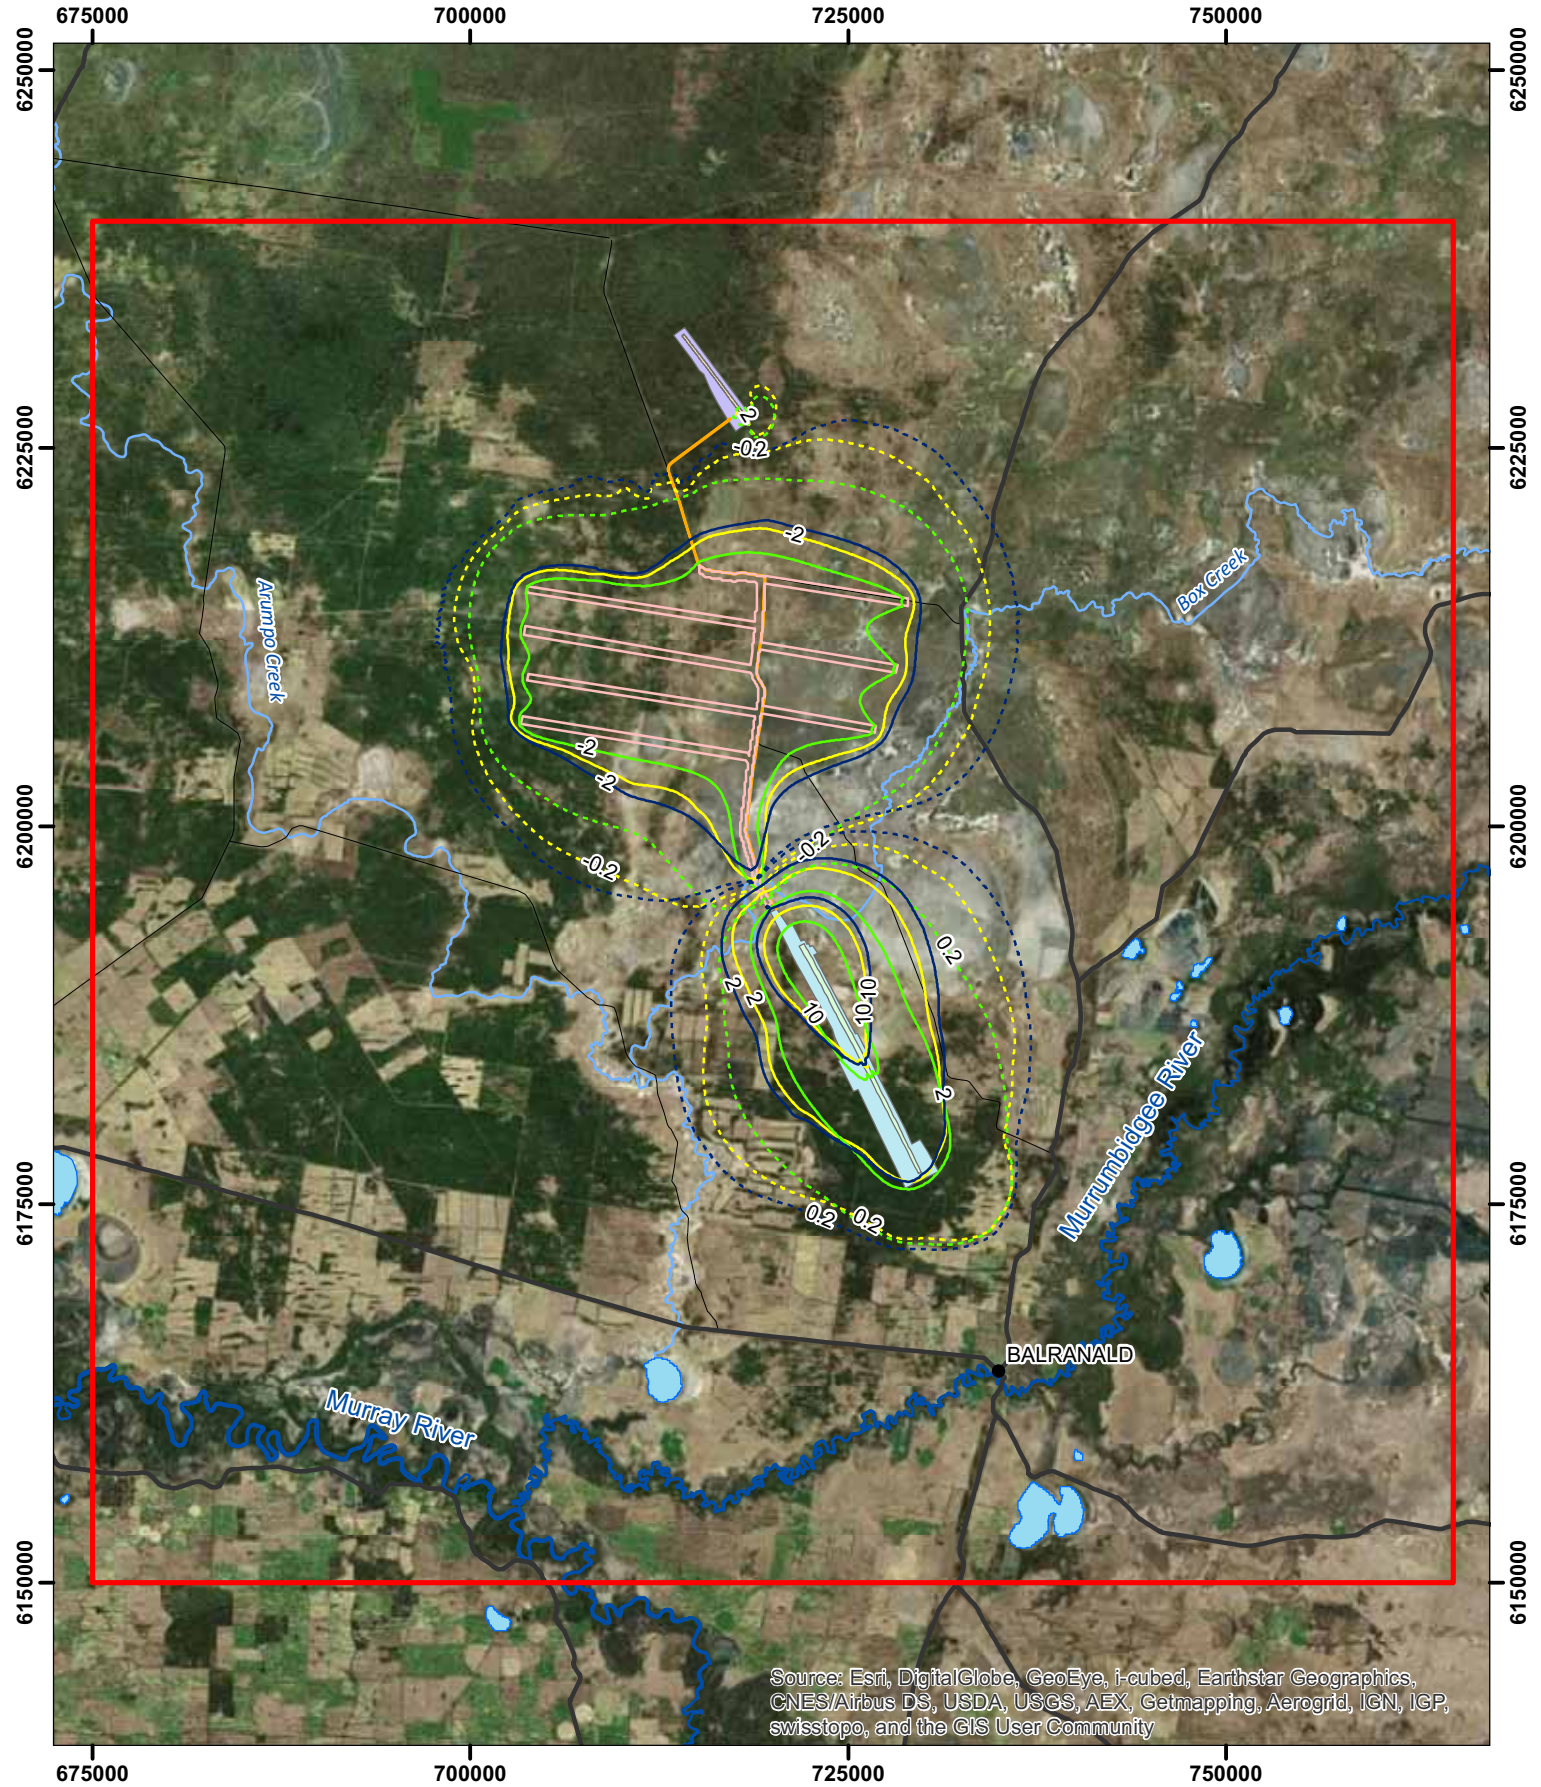

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 drawdown uncertainty analysis in LPS1 foreshore at mining year 6 **Figure 7.4**

I:\VESA\Projects\VE23875\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Uncertainty analysis\Rev2\BAL2.0_TS2_opt29_20230101_L3_DO_U.mxd

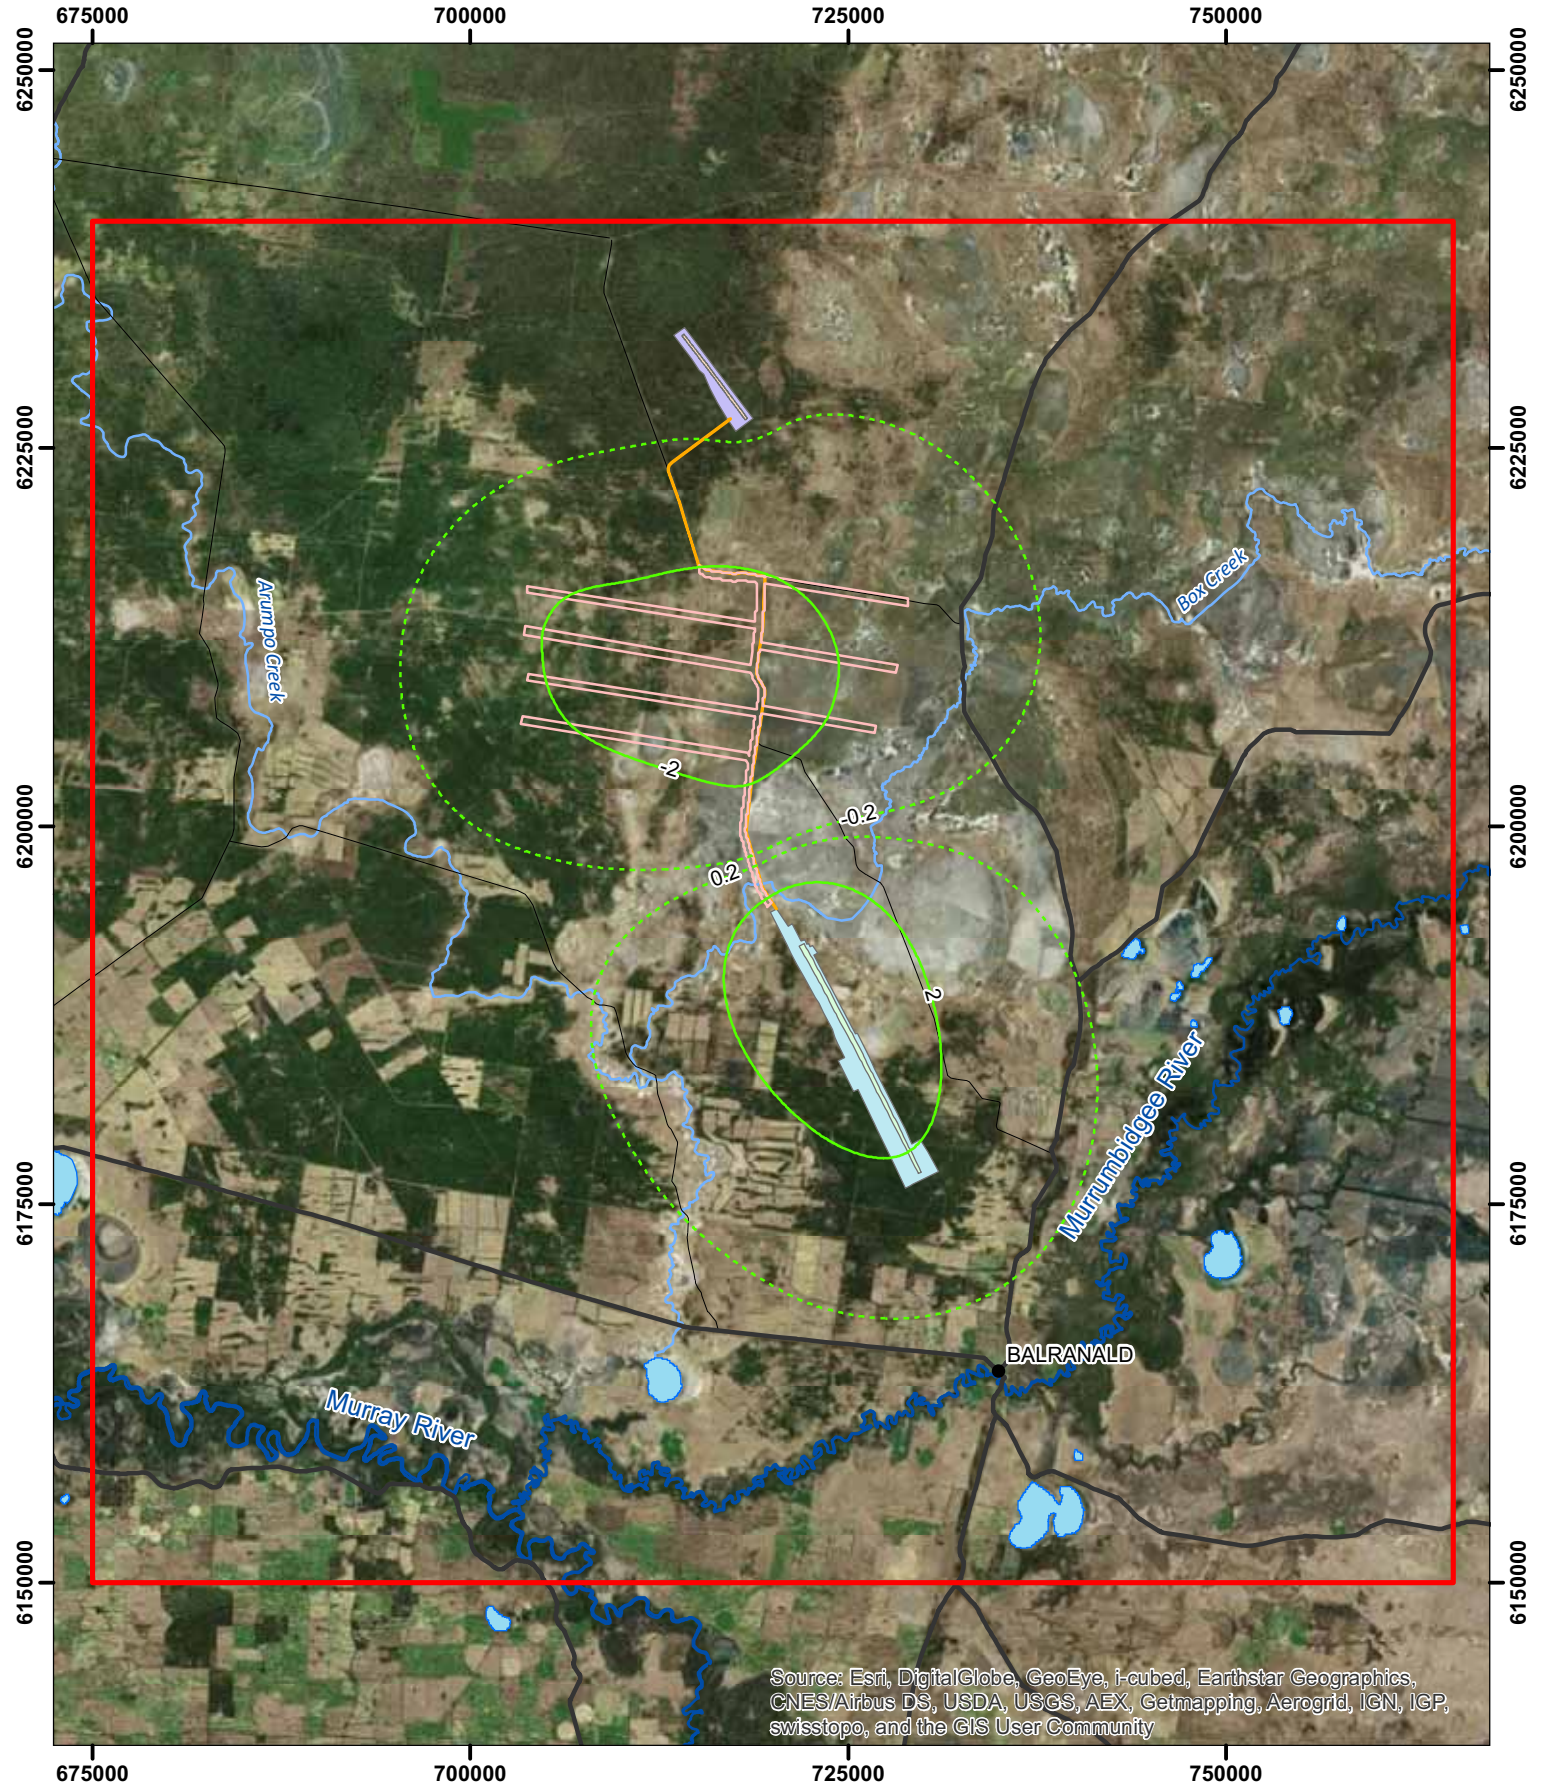


- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 drawdown uncertainty analysis in Olney Formation at mining year 6 **Figure 7.5**

I:\VESA\Projects\VE23875\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Uncertainty analysis\Rev2\BAL2.0_TS2_opt29_20230101_L9_DO_U.mxd

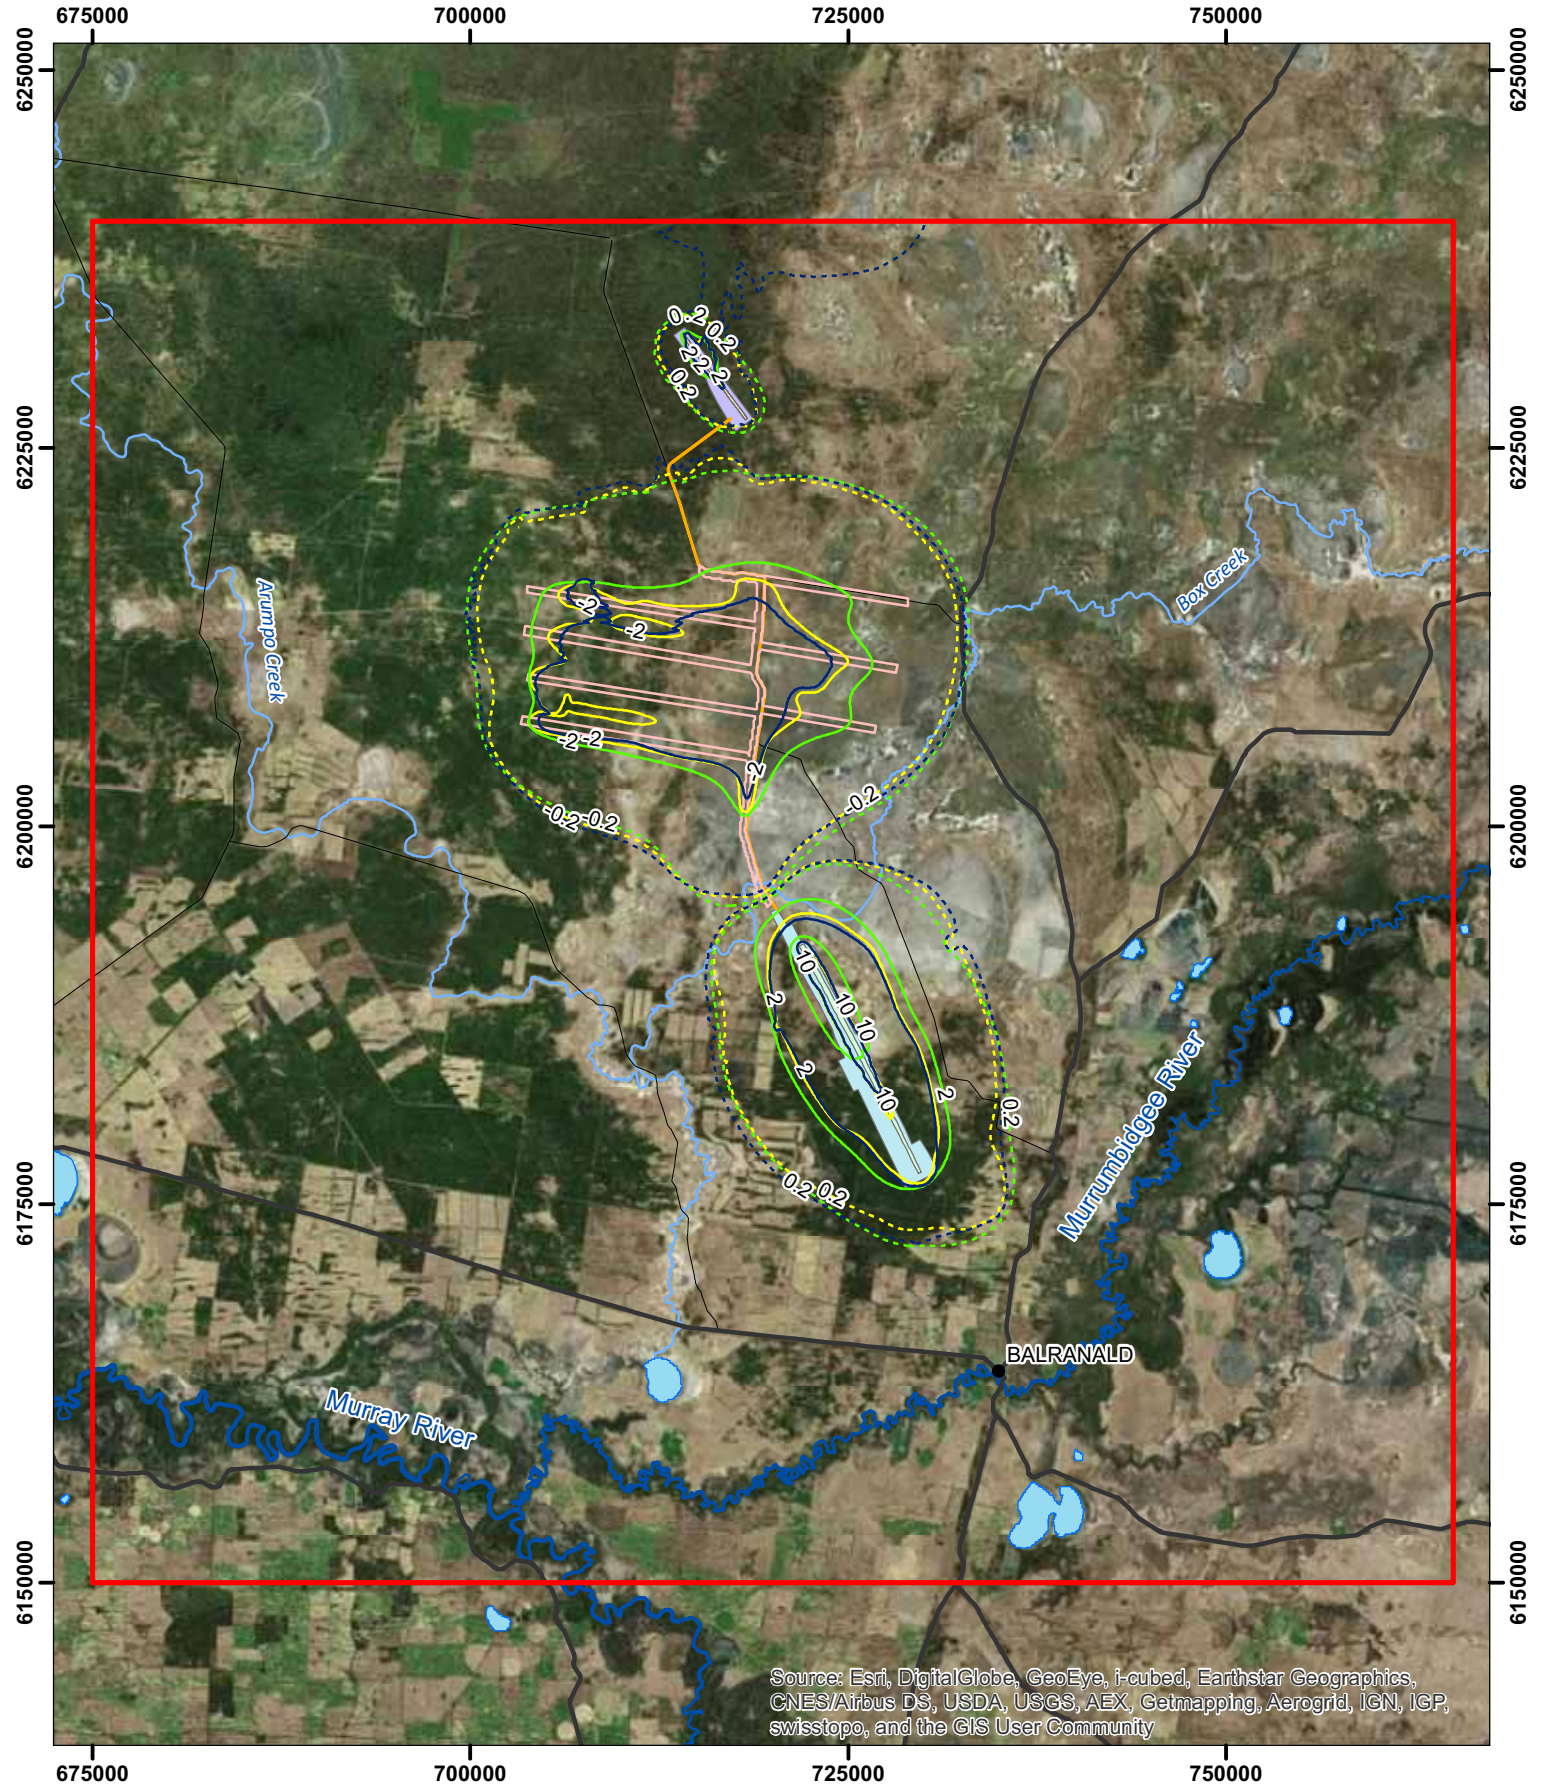


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 drawdown uncertainty analysis in Shepparton Formation at mining year 8 **Figure 7.6**

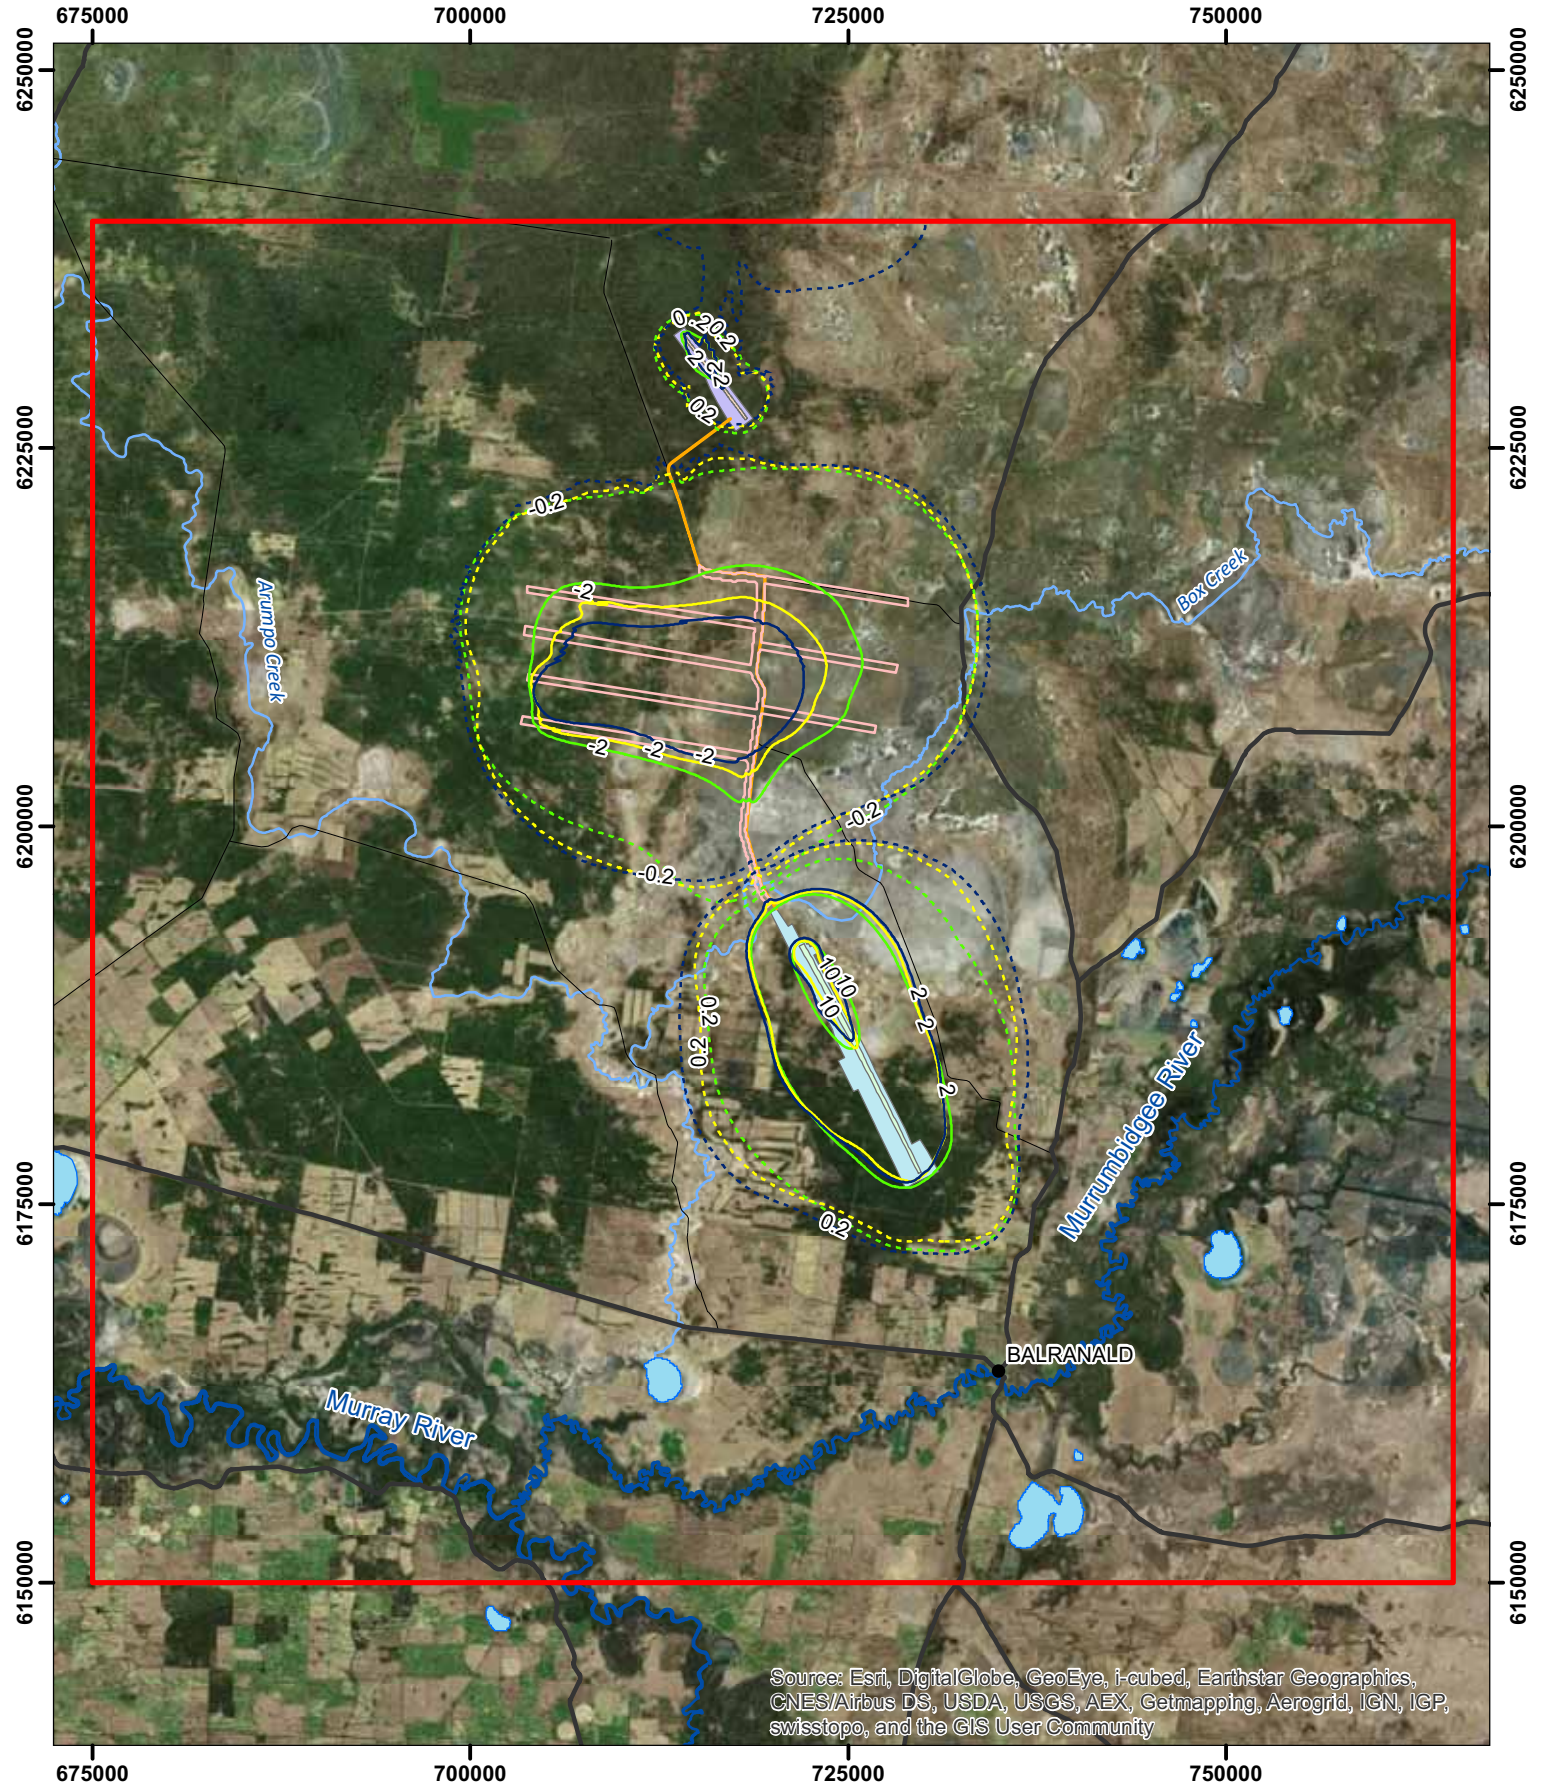

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 drawdown uncertainty analysis in LPS1 foreshore at mining year 8 **Figure 7.7**

I:\VESA\Projects\VE23875\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Uncertainty analysis\Rev2\BAL2.0_TS2_opt29_20250101_L3_DO_U.mxd

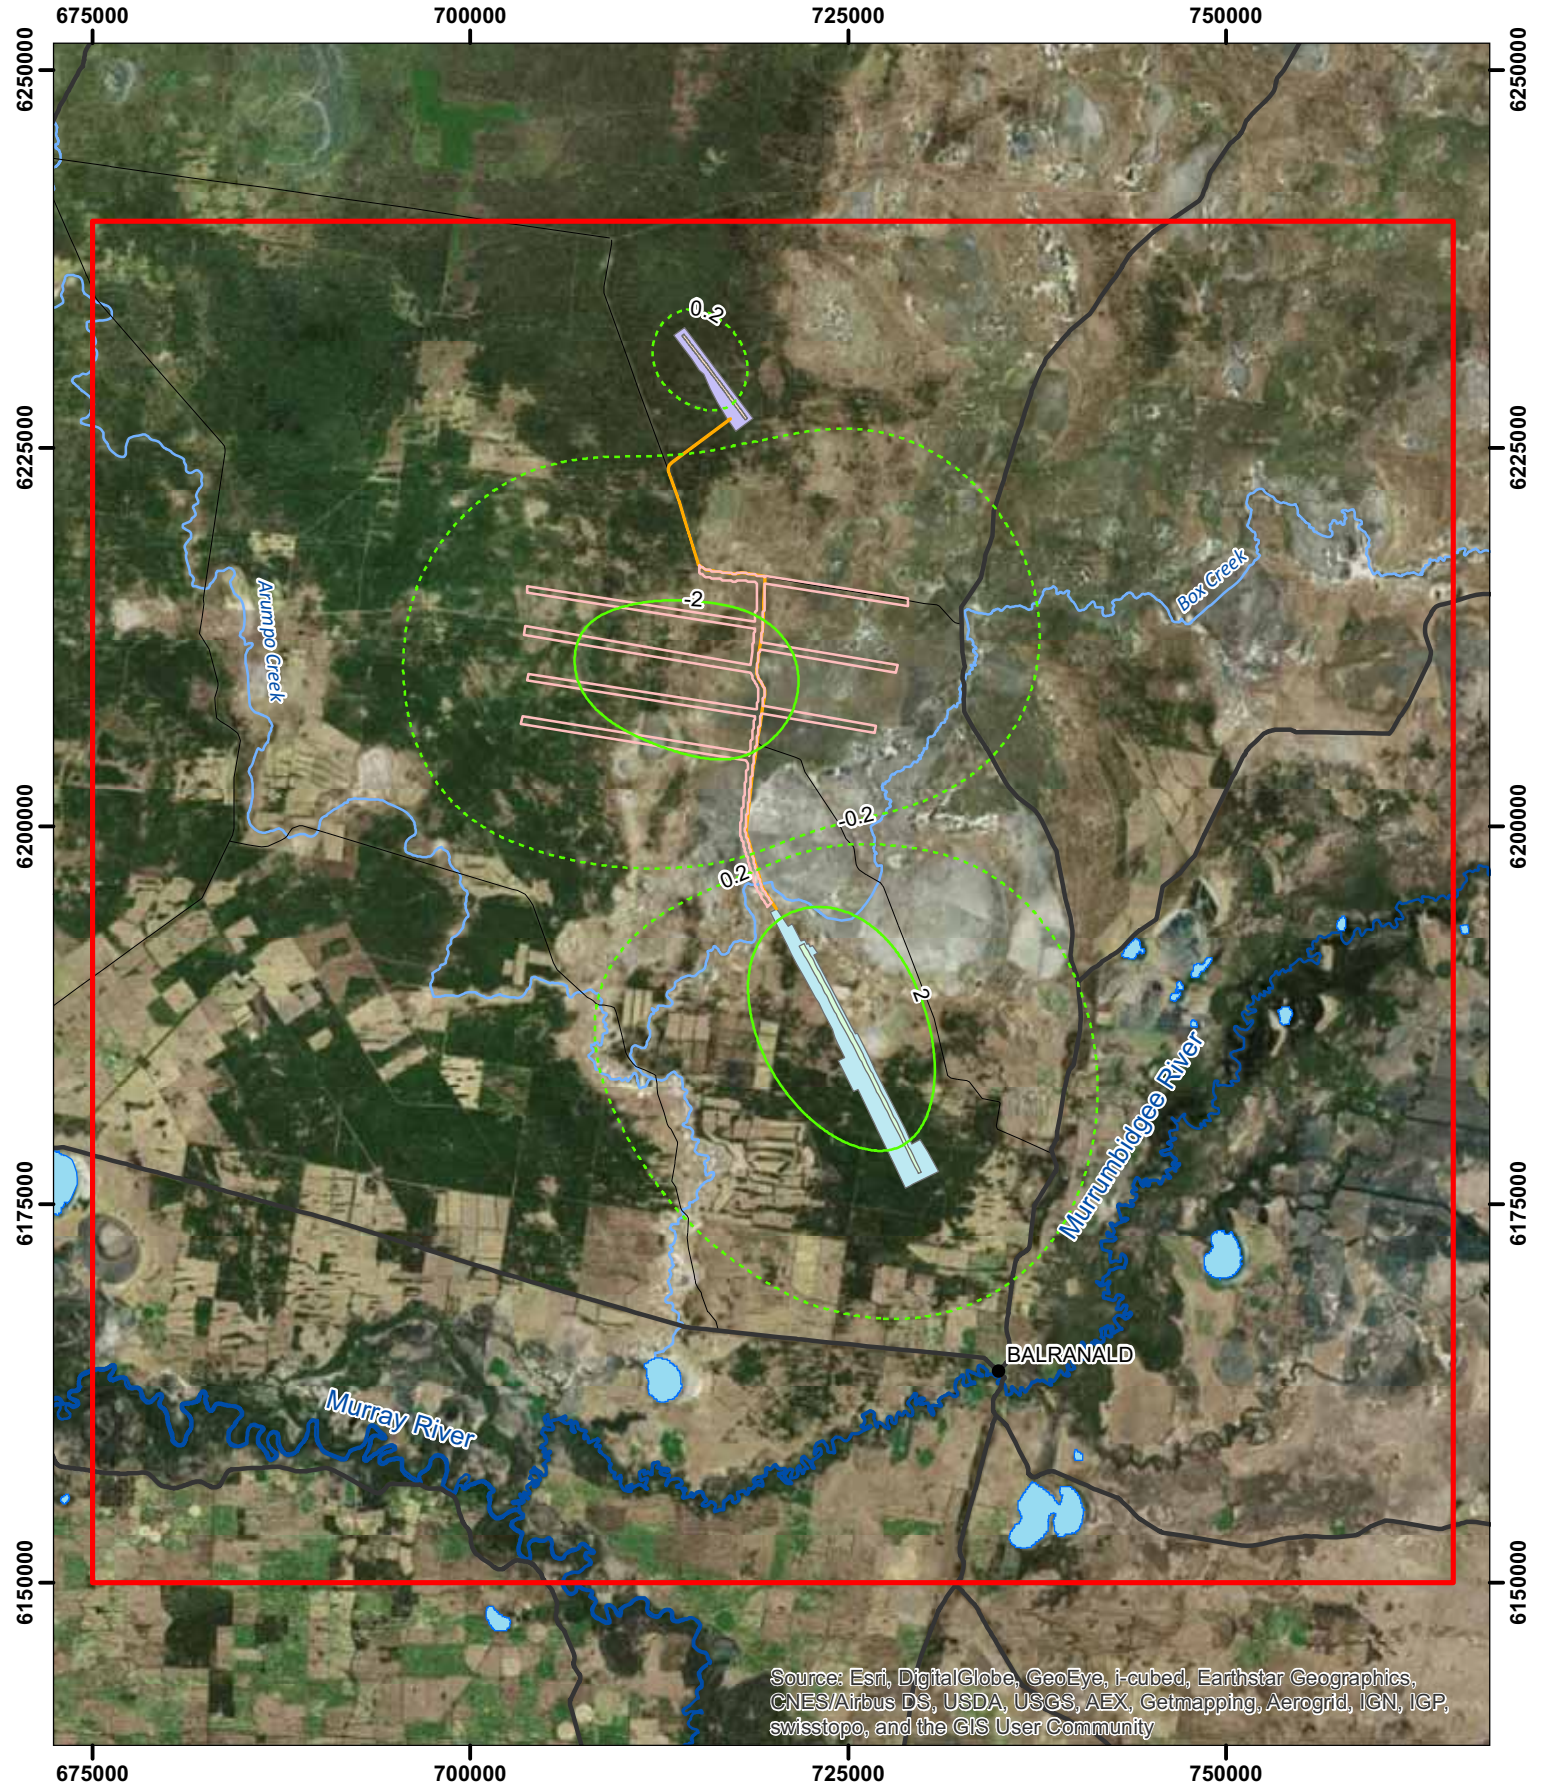

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 drawdown uncertainty analysis in Olney Formation at mining year 8

Figure 7.8

I:\VESA\Projects\VE23875\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Uncertainty analysis\Rev2\BAL2.0_TS2_opt29_20250101_L9_DO_U.mxd



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 drawdown uncertainty analysis in Shepparton Formation
100 years post-mining
Figure 7.9

I:\VESA\Projects\VE23875\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Uncertainty analysis\Rev2\BAL2.0_TS2_opt29_21250101_L1_DD_U.mxd



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain




BAL2.0 TS2 opt29 drawdown uncertainty analysis in Shepparton Formation
100 years post-mining **Figure 7.10**

I:\VESA\Projects\VE23875\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Uncertainty analysis\Rev2\BAL2.0_TS2_opt29_21250101_L3_DO_U.mxd



- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Base case drawdown and mounding (m)
- High dewatering drawdown and mounding (m)
- Low dewatering drawdown and mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 drawdown uncertainty analysis in Olney Formation
100 years post-mining **Figure 7.11**



8. Model Capabilities and Limitations

The BAL2.0 model presented in this report has been designed to provide regional groundwater impact assessment of groundwater-affecting activities planned for development of the Project. The model has been informed by currently available hydrogeological data. These include a good coverage of bore logs around the deposits, but poorer coverage in areas more remote from the deposits. Of particular interest is the area between the West Balranald and Nepean deposits where the off-path injection wellfield is proposed. Whilst some logs are available for this area, given its importance for injection, Iluka plans to further investigate the presence and properties of the LPS surf zones in this region. The model currently assumes that the thick, highly transmissive LPS2 surf zone encountered in wells near “Nanda” and “Upson Downs” is present across the injection wellfield footprint.

The model is calibrated using data from production and injection tests run at rates of up to 70 L/s and for durations of up to 47 days. These stresses are considerably lower than those planned during operation of the Project and, hence, there is inherent uncertainty with regard to how the groundwater system will respond under different conditions to those to which it is calibrated. Of particular importance is the fact that current pumping and injection test data do not enable identification of the LPS specific yield, which is expected to have a significant influence on the required dewatering pumping rates. A value for this parameter has been obtained from models calibrated to mining stresses at two of Iluka’s other mines in similar settings.

The model is suited to informing high-level dewatering and injection infrastructure design. It does not contain the necessary representation of individual wells to aid design of optimum well spacings and injection rates.

The model does not simulate the temporal changes in aquifer hydraulic properties expected to occur as a result of excavation and subsequent backfilling of the mine pits, as it is considered unnecessary for a regional groundwater impact assessment.

9. Summary and Conclusions

Groundwater modelling has demonstrated that an appropriate groundwater management scheme can be implemented for mining of the West Balranald and Nepean deposits. The scheme involves dewatering at both deposits, at rates of up to around 1,300 L/s at West Balranald (about 700 L/s on average) and around 190 L/s at Nepean (about 100 L/s on average). The model has been constructed in such a way that these are expected to be conservative estimates. Drawdown from dewatering at West Balranald is predicted to extend up to around 15 km from the deposit. Drawdown at Nepean is localised, extending a maximum of around 2 km from the deposit.

Water produced by dewatering operations is reinjected into the LPS via on-path injection wells at West Balranald and an off-path injection wellfield, located on and accessed from the West Balranald-Nepean haul road. Peak injection is around 1,300 L/s. The off-path wellfield has been sized such that injection is spread over a large area. This is done to ensure that mounding of the water table remains a minimum of 3 m below the ground surface to avoid waterlogging and salinisation of non-saline surface sediments.

Predictive uncertainty analysis has explored the sensitivity of model predictions to variability or uncertainty in key hydrogeological parameters included in the model. It has demonstrated that the proposed dewatering and injection plan is capable of delivering acceptable engineering and environmental outcomes under most possible combinations of uncertain model parameters.

Modelling has demonstrated that operation of a water supply during the three years of pre-mining construction, at rates of up to 150 ML/yr, can be supported by the Olney Formation. Drawdown from the water supply wells is localised and not expected to have a significant impact on the regional groundwater system.

The model-predicted water balance suggests that dewatering and injection activities associated with the mine will primarily add and remove water from storage in the groundwater system. No significant impacts are predicted on leakage to or from the Murrumbidgee and Murray Rivers.

10. References

HydroSOLVE, Inc., 2015. AQTESOLV, www.aqtesolv.com.

AquaGeo, pers. comm. Insights from Bradley van Blomestein regarding the hydrogeology of the Balranald Project during the Pre-Feasibility Study. 2012-2013.

Allison, GD and Hughes, MW, 1983. The use of natural tracers as indicators of soil-water movement in a temperate semi-arid region, *Journal of Hydrology* 60, p157-173.

Barnett, B, Townley, LR, Post, V, Evans, RE, Hunt, RJ, Peeters, L, Richardson, S, Werner, AD, Knapton, A and Boronkay, A, 2012. Australian Groundwater Modelling Guidelines. Waterlines Report Series No. 82, National Water Commission, Canberra. June 2012.

BOM, 2014. Climate maps and weather station data accessed at www.bom.gov.au.

Brown, CM and Stephenson, AE, 1991. BMR Bulletin 235 Geology of the Murray Basin, Southeastern Australia. Bureau of Mineral Resources, Geology and Geophysics, Australian Government Publishing Service, Canberra, Australia.

Budd, G, Williams, R, Cook, P and Walker, G, 1990. Impact of Mallee clearing on rainfall accession to the groundwater in far southwest New South Wales: implications for management, in: Nobel JC, Joss, JP, and Jones, GK (eds), *The Mallee lands: a conservation perspective*, proceedings of the National Mallee Conference, Adelaide, South Australia, April 1989, Chapter 21: p129-134.

CDM Smith, 2015. Balranald Mineral Sands Project Groundwater Dependent Ecosystems Assessment Report. Report prepared for Iluka Resources Limited.

DEPI, 2014. River gauge data accessed at <http://data.water.vic.gov.au/monitoring.htm>.

Doherty J, 2005. PEST Model-Independent Parameter Estimation User Manual: 5th edition. Watermark Numerical Computing.

Domenico, PA and Schwartz, FW, 1998. *Physical and Chemical Hydrogeology - Second Edition*, John Wiley & Sons Inc., New York, USA.

ESI, 2014. Groundwater Vistas version 6. Environmental Systems Incorporated, www.groundwatermodels.com.

Evans, WR, 2014. File note: Discussions on stratigraphic conceptualisations, West Balranald, report prepared for Iluka Resources Limited, 20 August 2014.

Evans, WR and Kellett, JR, 1989. The hydrogeology of the Murray Basin, southeastern Australia, *BMR Journal of Australian Geology and Geophysics*, 11, p147-166.

Fitzpatrick, R, Powell, B, and Marvanek, S, 2011. *Atlas of Australian Acid Sulphate Soils. v2*. CSIRO Data Collection.

HGL, 2014. MODFLOW-SURFACT version 4. HydroGeoLogic, Inc., www.hgl.com.

Horner, K, 2012. New environmental tracer methods for quantifying solute sources in semi-arid alluvial aquifers. Research School of Earth Sciences, College of Physical and Mathematical Sciences. December 2012.

Iluka, 2009. Structural and geological interpretation of the Hatfield and Eastern Block Tenements EL6579, EL6580, EL6975, EL6478, EL6669, EL6816 and EL6970, 2009 update. Technical Report TR-T16566, January 2009.

- Iluka, 2011a. Nepean Geological Resource Report Summary. Technical Report TR-T17697, July 2011.
- Iluka, 2011b. West Balranald Geological Resource Report Summary. Technical Report, December 2011.
- Iluka, 2015. Balranald DFS Hydrogeological Field Program Drilling and Pumping Test Campaign. Technical Report TR-, February 2015.
- Jacobs, 2014. West Balranald – Nepean mineral sands EIS: review of water quality data. Report prepared for Iluka Resources Limited, December 2014.
- Kellett, JR, 1989. The Ivanhoe Block – its structure, hydrogeology and effects on groundwaters of the Riverine Plain of New South Wales. BMR Journ Aus Geol Geophys 11, p333-353.
- Kellett, JR (BMR), 1991. Pooncarie Hydrogeological Map (1:250 000 scale). Bureau of Mineral Resources, Geology and Geophysics, Canberra, Australia.
- Kellett, JR (AGSO), 1994. Balranald Hydrogeological Map (1:250 000 scale). Australian Geological Survey Organisation, Canberra, Australia.
- Lawrence, CR, 1975. Geology, hydrodynamics and hydrochemistry of the southern Murray Basin. Geological Survey of Victoria Memoir 30.
- McPhail, MK, Kellett, JR, Rexilius, JP and O'Rorke, ME, 1993. The "Geera Clay equivalent": a regressive marine unit in the Renmark Group that sheds new light on the age of the Mologa weathering surface in the Murray Basin. AGSO Journal v14 no 1 p47-64.
http://www.ga.gov.au/corporate_data/49406/Jou1993_v14_n1.pdf.
- Macumber, PG, 1978. Evolution of the Murray River during the Tertiary Period. Evidence from Northern Victoria. Proc Roy Soc Vic 90(1), p43-52.
- Macumber, PG, 1991. Interaction between groundwater and surface water systems northern Victoria. Vic DCE, Melbourne.
- Miranda et al., 2009. Tectonism and Eustacy across a Late Miocene strandplain: The Loxton – Parilla Sands, Murray Basin, Southeastern Australia Sedimentary Geology 219, p24-43.
- Northey, JE, Christen, EW, Ayars, JE and Jankowski J, 2006. Occurrence and measurement of salinity stratification in shallow groundwater in the Murrumbidgee Irrigation Area, south-eastern Australia. Agricultural Water Management, 81(1-2), p23-40.
- OW, 2014. River gauge data accessed at <http://realtimedata.water.nsw.gov.au/water.stm>.
- Peels, S, Stannard, ME and Talsma, T, 1968. Environmental studies of the Coleambally Irrigation Area and surrounding districts. Land Use Series Bulletin No. 2. Water Conservation and Irrigation Commission, NSW.
- Radke, B, 1990. Sedimentology of the Hatfield 1 borehole. BMR Record 1990/1.
http://www.ga.gov.au/corporate_data/14296/Rec1990_001.pdf.
- Shand, P, James-Smith, J, Hodgkin, T, Fitzpatrick, R, McClure, S, Raven, M, Love, A, Stadter, M and Hill, T, 2006. Al(OH)₃ clogging in salt interception scheme boreholes at Bookpurnong, Murray Basin: The role of pyrite and hydroxyl-sulfate minerals in ancient coastal acid sulfate sediments. In: Inland Acid Sulfate Soil Systems Across Australia (Eds: Fitzpatrick, R and Shand, P) CRC LEME Open File Report No. 249, p129-136 CRC LEME, Perth, Australia.
- SKM, 2011. Northern Murray Basin: Kulwin Mine groundwater model validation and predictive scenarios. Report prepared for Iluka Resources Limited, June 2011.

SKM, 2013a. Groundwater modelling of mining the West Balranald and Nepean mineral sands deposits. Report prepared for Iluka Resources Limited, 11 February 2013.

SKM, 2013b. Western Porous Rock groundwater Sustainable Diversion Limit review. Report prepared for Murray-Darling Basin Authority, 16 April 2013.

SKM, 2013c. Iluka WRP Mine dewatering model update. Report prepared for Iluka Resources Limited, June 2013.

URS, 2009. Hydrogeological Study Phase 1 – West Balranald Deposit. Report prepared for Iluka Resources Limited, 8 October 2009.

URS, 2011. Conceptual Hydrogeological Model – Balranald PFS Project. Report prepared for Iluka Resources Limited, 17 June 2011.

URS, 2012. Balranald PFS Hydrogeological Study. Report prepared for Iluka Resources Limited, 17 July 2012.

Woolley, DR, Day, KW and Ashby, V, 1992. Hay Hydrogeological Map (1:250,000 scale). Map sheet SI 55-10, Department of Water Resources, Australian Geological Survey Organisation, Canberra, Australia.

Woolley, DR and Williams KW, 1978. Tertiary stratigraphy and hydrogeology of the eastern part of the Murray Basin NSW. In Storrier, RR and Kelly, ID (Eds.) The Hydrogeology of the Riverine Plain of South-East Australia (p45-63). Australian Society of Soil Science, Inc. Riverina Branch.

Appendix A. Independent review by Hugh Middlemis

MEMO-REPORT

ATTENTION:	Joel Georgiou, Senior Hydrogeologist, Iluka Resources Limited	
FROM:	Hugh Middlemis, Principal Groundwater Engineer, Hydrogeologic	
REFERENCES:	26 March 2015	Balranald_Model_Review_1b_Middlemis_2015.Docx
SUBJECT:	Balranald Project Groundwater Model Review (BAL2.0, March 2015)	

1. Overview

This report summarises the outcomes of an independent review of the Balranald Project numerical groundwater flow model developed for Iluka by Jacobs. The focus of this review is the Impact Assessment Modelling (Jacobs, 2015) completed with the BAL2.0 version regional model (engineering design and related risk management issues were not considered).

The review was conducted in accordance with the principles of the 2012 Australian Groundwater Modelling Guidelines (Barnett et al., 2012), as well as the Murray Darling Basin Commission Groundwater Flow Modelling Guideline (Middlemis et al, 2001), which was the foundation for the 2012 guidelines (and remains valid for Murray-Darling Basin projects, such as the Balranald mineral sands mining project). The 2012 guideline suggests a compliance checklist suitable for high-level appraisals, which can also be used to summarise the outcomes of a review. The completed summary checklist is presented at **Error! Reference source not found.**, and justifications for the opinions indicated are summarised in the comments field, with key elements explored in later sections.

In summary, it is my professional opinion that the BAL2.0 model has been developed consistent with best practice for a medium complexity or Class 2 model confidence level classification, meaning that this model is suitable for mining project impact prediction purposes.

Table 1 - Groundwater Model Compliance Checklist: 10-point essential summary

Question	Yes/No	Comments re Balranald groundwater model (BAL2.0)
1. Are the model objectives and model confidence level classification clearly stated?	Yes	A confidence level Class 2 modelling tool is stated as being required to provide information for support the design of and quantify the impacts of a groundwater management scheme for the Balranald mineral sand mining project that includes dewatering and injection wellfields.
2. Are the objectives satisfied?	Yes	The objectives are satisfied via sound model design and calibration performance, including using fine-grid local scale models at pumping test sites for parameter calibration, and applying those parameters to the regional scale model for suitably conservative predictions to evaluate dewatering and related impacts and uncertainties.
3. Is the conceptual model consistent with objectives and confidence level classification?	Yes	The conceptualisation is sound, the key features are appropriately represented in the model design and its implementation, and uncertainties have been considered carefully, appropriate for the impact assessment objectives.
4. Is the conceptual model based on all available data, presented clearly and reviewed by an appropriate reviewer?	Yes	A multi-disciplinary team at Iluka and Jacobs has clearly been involved in the hydrogeological investigations and data analysis undertaken since 2011. Specialist hydrogeologist Ray Evans also contributed his skills and long experience on Mallee zone hydrogeology to address key geological and stratigraphic issues. The hydrogeological data and conceptual model descriptions in the report are excellent.

5. Does the model design conform to best practice?	Yes	<p>The model design, software, extent, cell size, boundaries and parameters are consistent with best practice.</p> <p>The design is innovative in using local scale models for parameter calibration to pumping test data and then applying those parameters to the regional scale model. While the regional model was calibrated with these values in steady state only, the 100-year warm-up period for the transient prediction scenarios essentially forms a 100-year transient calibration, with the pseudo-steady groundwater levels confirming the hydrodynamic equilibrium of the groundwater system under the influence of regional flows and low rainfall recharge. This means that the model calibration period actually exceeds the prediction scenario period by a factor of more than 10, albeit with zero pumping stresses involved (i.e. demonstrating model compliance with a key Class 2 criterion).</p>
6. Is the model calibration satisfactory?	Yes	<p>Model calibration performance is good in terms of statistical measures, matches of modelled contours to regional bore spot height data, and modelled groundwater level matches to time series data from pumping and injection tests at various sites. The regional bore time series data shows a slight long term recession (order of mm to cm per year, consistent with the findings of a recent review of Mallee zone groundwater levels undertaken by the author for the MDBA; in press). This is also consistent with the results from the 100-year warm up modelling period prior to the prediction scenarios.</p>
7. Are the calibrated parameter values and estimated fluxes plausible?	Yes	<p>Calibration uses measured data on groundwater levels and fluxes for bore extraction and injection. An appropriate level of complexity in parameter distributions has been applied to achieve overall good calibration performance. The parameter values and fluxes are plausible and generally consistent with site-specific testing and also literature values (except for post-closure, as outlined below).</p>
8. Do the model predictions conform to best practice?	Yes	<p>The methods applied were consistent with best practice, except that the post-closure aquifer parameters are unchanged from in-situ values, which could over-estimate aquifer recovery rates and groundwater levels, and specific uncertainty analysis is warranted.</p>
9. Is the uncertainty associated with the predictions reported?	Yes	<p>Aquifer parameter sensitivity was analysed and the results used to evaluate related uncertainties in the model predictions. This was executed very well, consistent with the guidelines, in a manner that addresses the potential effect of uncertainty on the project objectives (which is unusual in this reviewer's experience, and demonstrates the professional approach applied to implementing best practice in this case).</p>
10. Is the model fit for purpose?	Yes	<p>My professional opinion is that the model has been developed in a manner consistent with best practice and that it is indeed fit for the stated purpose of environmental impact assessment in relation to the Balranald mineral sands mining project groundwater management system.</p>

2. Review Approach

For the record, the reviewer (Hugh Middlemis) is an independent groundwater modelling specialist with more than 25 years' experience in this field, was awarded a Churchill Fellowship in 2004 to benchmark groundwater modelling against international best practice, and is principal author of the MDBA groundwater modelling guidelines (Middlemis et al, 2001).

This memo summarises the outcomes of a progressive review of the Balranald Project numerical groundwater flow model developed for Iluka by Jacobs. The aim was to identify whether the model setup and calibration performance is consistent with best practice and forms a good foundation for the prediction runs undertaken to evaluate environmental

impacts (engineering design and risk management considerations were not a focus of this review).

It is worth noting that the reviewer has been involved at various stages of the development of the Balranald project models:

- during the period from May 2012 to March 2013 (when employed at RPS Aquaterra), and
- subsequently during the model refinement and re-calibration of the BAL2.0 model version:
 - the BAL2.0 calibration review was undertaken at Iluka's Kent Town office on 22 October 2014, with Dr Doug Weatherill (Senior Modeller, Jacobs) presenting information on the model and answering questions raised by the reviewer; Dr Weatherill navigated through the model data files and results directly on the modelling computer, while under observation by the reviewer, to demonstrate the calibration model capability, functionality and performance (report documentation was not available)
 - the BAL2.0 prediction scenario review was undertaken on 7 November 2014, in a similar process, to identify whether the model setup and calibration performance is consistent with best practice and forms a good foundation for the prediction runs to be undertaken to evaluate environmental impacts.

During this review, it was not possible to evaluate comprehensively the entire range of hydrogeological data nor every element of the gigabytes of model data files, nor indeed all the background reports. While this review does not consider or address all uncertainties and risks, it aims to investigate any weaknesses relating to the model design and implementation, based on application of the review protocols in modelling guidelines. Given the aim to identify weaknesses, the review process tends to focus on negative aspects. However, it is acknowledged that most elements of the technical modelling process have been very well executed in this case.

3. Modelling Approach

The fundamental model purpose is to assess broad dewatering strategies and the related impacts, requiring a Class 2 or medium complexity model. There are certain high complexity model elements, notably the aquifer structure and parameter values from calibration to pumping and injection tests. While there are some lower complexity model elements (typical for most models), the sensitivity and uncertainty assessment methodologies applied in this case tend to confirm confidence in the model results. It is reasonable to assign the BAL2.0 model an overall medium complexity status (Middlemis et al, 2011) or Class 2 model confidence level (Barnett et al 2012), appropriate for mining project impact prediction purposes.

3.1 Hydrogeological Conceptualisation

The model design, boundary conditions and parameters are based on the substantial hydrogeological investigations and modelling programs undertaken since 2011 (e.g. SKM, 2013). This has been updated with information from drilling, lithology/core inspections and pumping/injection test work programs throughout 2014 (Jacobs, 2015). The layer elevations in particular have been updated substantially and appear to be physically realistic. Specialist hydrogeological advice has been provided by Ray Evans (including notably on the formations below the Loxton-Parilla Sands or LPS), confirming that the geological and stratigraphic conceptualisation is valid and has been implemented appropriately in the model.

The major recharge and discharge processes represented in the model comprise the regional groundwater inflows and outflows via the general head boundaries, and the related groundwater level contours appear to be appropriate, compared to measured bore spot heights.

The River Murray and Murrumbidgee River features in the model act as losing streams forming a small component of the groundwater balance, which is broadly consistent with reports on previous investigations in the region. Given the high salinity of the regional groundwater system, any significant gaining streams should be obvious, and it is noted that

this area has not been subject to investment in the salt interception schemes that are prevalent further downstream (Mallee Cliffs) and around Mildura.

The evapotranspiration (EVT) feature has a shallow extinction depth (3m), which is consistent with the parameter applied to many models for salinity management purposes along the Murray. EVT does not constitute a major process in the modelled system (low volume component in the groundwater balance). This was confirmed from a spatial view of active EVT cells in the model, which are isolated in certain low-lying areas and show low discharge rates.

Diffuse rainfall recharge forms a small component of the groundwater balance, based on the uniformly applied low rate (0.1 mm/yr), consistent with uncleared mallee landscapes. The regional bore time series data shows a slight long term recession (order of mm to cm per year), which is consistent with the findings of a recent review of Mallee zone groundwater levels (undertaken by the author for the MDBA; in press).

The design is innovative in using local scale models for parameter calibration to pumping test data and then applying those parameters to the regional scale model. While the regional model was calibrated with these values in steady state only, the 100-year warm-up period for the transient prediction scenarios essentially forms a 100-year transient calibration, with the pseudo-steady groundwater levels confirming the hydrodynamic equilibrium of the groundwater system under the influence of regional flows and low rainfall recharge. This means that the model calibration period actually exceeds the prediction scenario period by a factor of more than 10, albeit with zero pumping stresses involved (i.e. demonstrating model compliance with a key Class 2 criterion).

3.2 Regional and Local Scale Models

The model calibration approach is iterative, providing a sound basis for the prediction scenarios:

- 9-layer regional model with a 90 km square extent and a uniform cell size of 500 m for the calibration model (refined in wellfield areas to 100 m minimum for the prediction scenarios);
- steady state regional model calibration to available long term monitoring bore data, with acceptable statistical performance measures for a remote mining project context, and generally good matches between modelled water level contours and measured spot heights;
- 100-year warm-up period for the transient prediction scenarios essentially forms a 100-year transient calibration, confirming the model design and parameterisation;
- four local scale (fine grid) models were developed using the regional model as a basis for layer structure and boundary conditions; the local model extents are typically 1-3 km square, with minimum cell sizes of about 0.25 m; the purpose is for calibration to the short term (1-7 days) pumping and injection test data at four sites along the mine path; one larger model (8 x 18 km) was developed for calibration to the 7-week long term test; also used to evaluate aquifer pressure responses to pumping and injection;
- remarkably consistent parameter values and strong calibration performance to pumping test data was achieved from the local scale models; the parameter values were applied to the regional model, and the steady state calibration performance was confirmed;
- regional model transient prediction simulations of mine dewatering from the LPS aquifer were modelled via blanket drain cells across the active pit area, with drain invert levels set to 5 m below the target pit floor; while this is not physically realistic (actual dewatering will be implemented via dewatering wells on the pit periphery and pit floor sumps in specific locations), it is a conservative approach that is appropriate for impact prediction purposes as it will tend to over-estimate drawdown impacts; a "truck and shovel" mining method was assumed, which involves a conservative over-estimate of the mine footprint;
- excess water was modelled by injection to the LPS aquifer mostly at a highly transmissive aquifer zone located off-mine-path midway between the West Balranald and Nepean deposits; constraints were applied to keep groundwater levels to less than 3 m below natural surface, a conservative measure designed to reduce waterlogging and/or salinisation risks;
- simulations of post-mine aquifer recovery assumed progressive pit infilling and

rehabilitation, but with aquifer parameter values unchanged from in situ values; as post-closure aquifer parameters are unchanged from in-situ values, aquifer recovery rates and groundwater levels may be over-estimated, and specific uncertainty analysis is warranted

- a comprehensive sensitivity analysis was undertaken on Kh, Kv, Ss and Sy parameters, confirming the well-constrained calibration; the predictive uncertainty analysis used these results to evaluate a high and low dewatering case, demonstrating little material difference in predicted impacts; structural model uncertainty has not been tested, but this is not common in best practice.

3.3 Predicted Impacts on Rivers and Regional Groundwater Flows

The model report shows that the drawdown due to mine dewatering and injection does not extend to the Murrumbidgee River or to the Murray River. However, it also concludes that *“the modelled variations in river leakage are both within the error bounds of the modelled water balance and very small compared to flow in the river. Furthermore, given that predicted drawdown impacts do not reach the Murray and Murrumbidgee Rivers, no significant impacts are expected on flows in these water bodies.”* However, careful inspection of the water balance volumes presented in Table 6.2 (copied below, for the record) reveals some interesting insights, outlined below.

Table 6.2 : Annual water balances through construction, mining and recovery

	Pre-development		Construction (3 yr)		Mining Year 1		Mining Year 2		Mining Year 3		Mining Year 4	
	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)
Storage	325	236	263	176	22,679	22,481	29,755	29,514	32,623	32,442	33,416	33,836
Recharge	296	-	296	-	296	-	296	-	296	-	296	-
Evapotranspiration	-	607	-	613	-	611	-	599	-	573	-	555
River leakage	1,512	97	1,457	99	1,456	99	1,456	99	1,456	98	1,456	98
Boundaries	7,831	9,127	7,789	8,987	7,783	8,978	7,779	8,966	7,775	8,958	7,772	8,952
West Balranald dewatering	-	-	-	-	-	19,546	-	20,435	-	21,346	-	22,421
Nepean dewatering	-	-	-	-	-	-	-	-	-	-	-	-
Injection	-	-	-	-	19,532	-	20,447	-	21,329	-	22,418	-
Water supply	-	-	-	125	-	-	-	-	-	-	-	-
TOTAL	9,904	10,007	9,804	10,000	51,744	51,715	59,732	59,012	63,479	63,417	65,358	65,802
	Mining Year 5		Mining Year 6		Mining Year 7		Mining Year 8		Recovery Year 1		Recovery Year 100	
	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)	In (ML/yr)	Out (ML/yr)
Storage	40,057	40,219	43,775	44,573	24,205	23,375	14,799	14,561	7,084	7,054	439	477
Recharge	296	-	296	-	296	-	296	-	286	-	286	-
Evapotranspiration	-	551	-	547	-	545	-	543	-	524	-	495
River leakage	1,456	98	1,456	98	1,456	98	1,456	98	1,407	95	1,401	92
Boundaries	7,770	8,946	7,769	8,944	7,767	8,524	7,768	8,923	7,513	8,627	7,491	8,589
West Balranald dewatering	-	27,004	-	29,461	-	4,730	-	183	-	-	-	-
Nepean dewatering	-	-	-	76	-	2,300	-	2,295	-	-	-	-
Injection	27,144	-	29,616	-	6,269	-	2,065	-	-	-	-	-
Water supply	-	-	-	-	-	841	-	-	-	-	-	-
TOTAL	76,722	76,818	82,912	83,700	39,993	40,414	26,384	26,603	16,290	16,300	9,617	9,653

- River leakage “out” (groundwater inputs to river) increased very little during mining, from 97 ML/yr pre-development, to 99 ML/yr at construction, and then remained steady at about 98 ML/yr during mining; that indeed demonstrates little impact; this component then falls to 95 ML/yr at post-mining year 1 and to 92 ML/yr at post-mining year 100; this total effect is “only” about 5%, but this may be deemed an accountable impact in terms of the NSW Aquifer Interference Policy.
- River leakage “in” (river inputs to groundwater) decreased somewhat during mining, from 1512 ML/yr pre-development, to 1457 ML/yr at construction, and then remains steady at about 1456 ML/yr during mining; that again demonstrates little impact, and this component then falls further to 1407 ML/yr at post-mining year 1 and to 1401 ML/yr at post-mining year 100 (about 7% effect), leaving the reader confused on these questions:
 - why is there a 55 ML/yr reduction in leakage from the river due to construction, although construction pumping stresses are very low?
 - why is there no subsequent reduction due to mining when stresses are so high?

- why is there a subsequent further reduction immediately on cessation of mining of 50 ML/yr, and why does this reduce further by 6 ML/yr during the 100-year post-mining period?
- Boundary flows show a similar set of relatively minor changes:
 - Boundary inflow changes during mining, from 7831 ML/yr pre-development, to 7789 ML/yr at construction, and then further reductions during mining from 7783 to 7768 ML/yr (less than 1% effect), and further reductions again post-mining from 7513 to 7491 ML/yr (4% total effect); this indicates that mining project impacts of reducing regional boundary inflows extends throughout mining and beyond the 100-year post-mining period
 - Boundary outflow changes during mining, from 9127 ML/yr pre-development, to 8987 ML/yr at construction, and then further reductions during mining from 8978 to 8524 ML/yr by year 7 (7% effect), before increasing to 8923 in mine year 8 (why?), and then reducing further post-mining from 8627 to 8589 ML/yr (6% total effect); this indicates that the mining project impacts of reducing regional boundary outflow extends throughout mining and beyond the 100-year post-mining period
- Total effects on the water balance comprise about 116 ML/yr for river leakage and 878 ML/yr on boundary flows, or almost 1 GL/yr, applying over a period in excess of 100 years, which this review suggests should be described as significant, although the drawdown impacts do appear to be significant.

Further detailed analysis of model results was undertaken subsequent to the identification of the issue in the draft review report dated 2nd March. The aim was to try to identify the location, extent, magnitude and causative processes of these various effects on river-aquifer interactions. However, as the model is indeed extremely large, some software limitations affected the ability to undertake a comprehensive water balance analysis. The analysis was able to conclude that the volumes of river leakage are indeed very small in relation to typical river flows, and similarly for the boundary flow changes. While the causative processes have not been fully explained, the data has been presented clearly and the impacts are at least contextualised. It is recommended (assumed) that this data (will) be used by others to undertake a detailed analysis in relation to the Aquifer Interference Policy, as that is a notable gap in the scope of the modelling study and the report presented for review.

It is recommended that subsequent modelling work programs should investigate these issues in detail to improve our understanding of the hydrogeological dynamics involved. Further analysis is also required on the boundary inflows and outflows, and it is expected that there is likely to be some interactions between the regional boundaries and the river boundaries (e.g. apparent from inspection of Figures 2.12, 2.14 and 3.3 of the modelling report), and some influence from potentially extensive deep/confined aquifer pressure effects.

3.4 Discussion on Guideline Issue of Model Confidence Level or Complexity

The report sets a Class 2 model confidence level as a target and suggests that it has been achieved. It also identifies several areas where the model needs to be improved to achieve a Class 3 in due course, notably the length of predictions compared to calibration and the level of pumping stresses involved. However, in my view, if one were to apply these two guideline criteria *sensu stricto*, then they would relegate the model to a Class 1 confidence level, given this "guidance" (Barnett et al, 2012): "if a model falls into a Class 1 classification for either the data, calibration or prediction sectors, it should be given a Class 1 model [classification], irrespective of all other ratings", and: "when a predictive model includes stresses that are well outside the range of stresses included in calibration, the reliability of the predictions will be low and the model confidence level classification will also be low". Other "guidance" is similarly unhelpful, including:

- "a model that is calibrated in steady state only will likely produce transient predictions of low confidence"
- "in general, it should be acknowledged that if a model has any of the characteristics or indicators of a Class 1 model it should not be ranked as a Class 3 model, irrespective of all other considerations".

The following points explore these issues and suggest that it would be appropriate in this case to apply the guideline criteria *sensu lato* and ignore the unhelpful "guidance":

- the reported modelling approach is one of steady state calibration and transient model prediction, whereas the 2012 guidelines suggest low model confidence if only steady state calibration is undertaken; however, the 100-year transient simulation warm-up period effectively forms a transient calibration simulation (albeit with zero pumping stresses involved) and confirms the model performance as a valid predictive tool;
- the predicted dewatering rate (average ~750 L/s) is high compared to the low pumping test rates (<70 L/s), and the dewatering prediction time frame (about 8 years) is long compared to the much shorter pumping test calibration (<7 weeks);
 - the 2012 guidelines suggest a maximum ratio of 10 for the prediction duration compared to the calibration period; while the 8-year dewatering prediction is about 60 times the duration of the 7-week long term pumping test calibration, the 100-year transient simulation warm-up period effectively forms an adequate transient calibration period;
 - the average dewatering rate is more than 20 times the individual bore pumping test rates (15 L/s to 40 L/s per bore), and it is also more than 10 times the total rate for the long term test (70 L/s applied for about 15 days); although the 2012 guidelines suggest a maximum pumping stress ratio of 2-5 times, it is arguably impossible to undertake investigations for a proposed project at one fifth to one half of the full scale of the proposed project and for a duration long enough to achieve the guideline criteria; the criteria are not suitable for an impact prediction context, but could be more applicable to a compliance review of an approved an operational project (i.e. they could be used to guide approval conditions); in this case, the comprehensive sensitivity and uncertainty analysis undertaken addresses any residual risk issues, helping to justify a relaxed approach to applying the guideline criteria;
 - it is also important to note that the Balranald investigation is unusually comprehensive for a greenfields mining project (i.e. demonstrates best practice in a generic sense), extending over more than 4 years, with pumping and injection tests undertaken at five locations including a long term pumping and injection trial.

Further, information and analogues available from Iluka's operations elsewhere in the Murray Basin have been used to support the parameter values applied and to benchmark the aquifer responses to project-scale stresses and mining operations, improving confidence that key uncertainties have been addressed in a best practice manner.

While the BAL2.0 model may not strictly meet certain Class 2 confidence level criteria (Barnett et al, 2012), in my view that is an issue with the 2012 guideline and not an indicator of material flaws in this model or its performance. In terms of the 2001 guidelines (Middlemis et al, 2011), the medium complexity model design and performance is fundamentally sound and it is clearly suitable for impact assessment purposes. These issues have been discussed on several recent projects in Australia, and are planned to be subject to a review workshop at the 2015 IAH national conference.

Alternative approaches that are worth considering to clearly demonstrate that the regional model is directly consistent with the guidelines, as well as helping to address model uncertainty, would involve:

- regional model transient calibration to the available long term regional monitoring data, which should be feasible, given that the data apparently show no upwards or downwards long term trends, and/or
- regional model steady state prediction of mine dewatering impacts (a gross over-estimation method, although the impacts may not be acceptable); this could be undertaken by simulating dewatering of a mine extent equivalent to the maximum mining area that is open at any stage, applied to the middle of the mine path to represent "long term average mining conditions".

4. Conclusion

This independent model review did not identify any material weaknesses in the model design, boundary conditions, parameter values, calibration performance or sensitivity and uncertainty

assessments. Further analysis of model results is required to unpack the impact assessment implications of the apparent changes to the water balance components of river-aquifer interaction and regional boundary inflows/outflows.

It is my professional opinion that the BAL2.0 model has been developed consistent with the 2012 best practice guideline for a Class 2 model confidence level classification (medium complexity model in terms of the 2001 guidelines), and is suitable for mining project impact prediction purposes.

The report is a high quality document, which is notable in itself as exemplifying the best practice approach applied, and also as it succeeds so well where modelling studies commonly fail (most reviews identify report documentation as sub-standard).

Yours sincerely,
Hydrogeologic

Hugh Middlemis (Director).

References:


Barnett, B., Townley, L.R., Post, V., Evans, R.E., Hunt, R.J., Peeters, L., Richardson, S., Werner, A.D., Knapton, A. and Boronkay, A. (2012). Australian Groundwater Modelling Guidelines. Waterlines report 82, National Water Commission, Canberra. URL: <http://archive.nwc.gov.au/library/waterlines/82>.

Jacobs (2015). Balranald Project DFS1 Groundwater Modelling. Impact Assessment Modelling. Prepared for Iluka Resources. Jacobs document no. T18466, draft revision B, dated 23 February, 2015.

Middlemis, H., Merrick, N., Ross, J., and Rozlapa, K. (2001). Groundwater Flow Modelling Guideline. Prepared for Murray–Darling Basin Commission by Aquaterra, January 2001. URL: www.mdba.gov.au/sites/default/files/archived/mdbc-GW-reports/2175_GW_flow_modelling_guideline.pdf

SKM (2013). Balranald Project Groundwater Modelling (version 2). Prepared for Iluka Resources, dated 11 February, 2013.


Appendix B. Hydrostratigraphic data

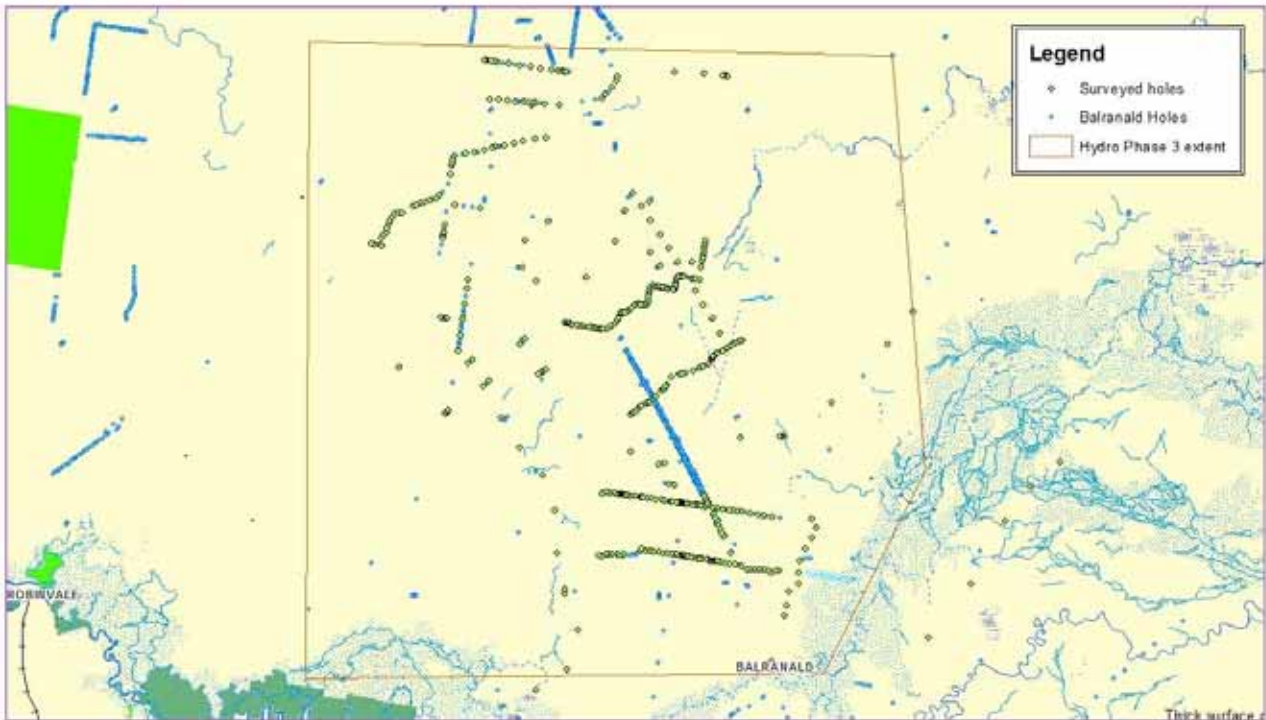

**Balranald Project
Holes Used in Survey**

ILUKA
FIGURE: 1

MGA Coordinates, GD484
ORG: Originator DRAWN: Drawn SCALE: 1:418,284 (A4) DATE: Date: 14/09/2013(DWG No)

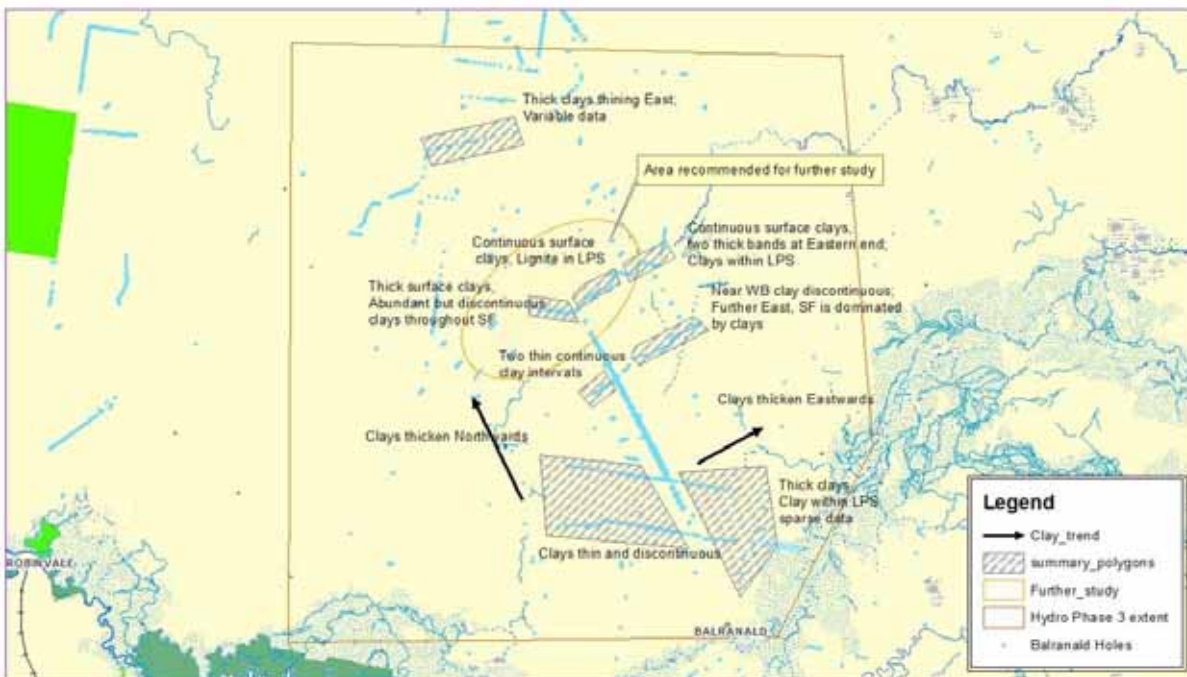


**Balranald Project
Summary of Findings**

ILUKA
FIGURE: 3


MGA Coordinates, GD484
ORG: Originator DRAWN: Drawn SCALE: 1:418,284 (A4) DATE: Date: 14/09/2013(DWG No)

Locations of bores used and summary results of Iluka (2013)

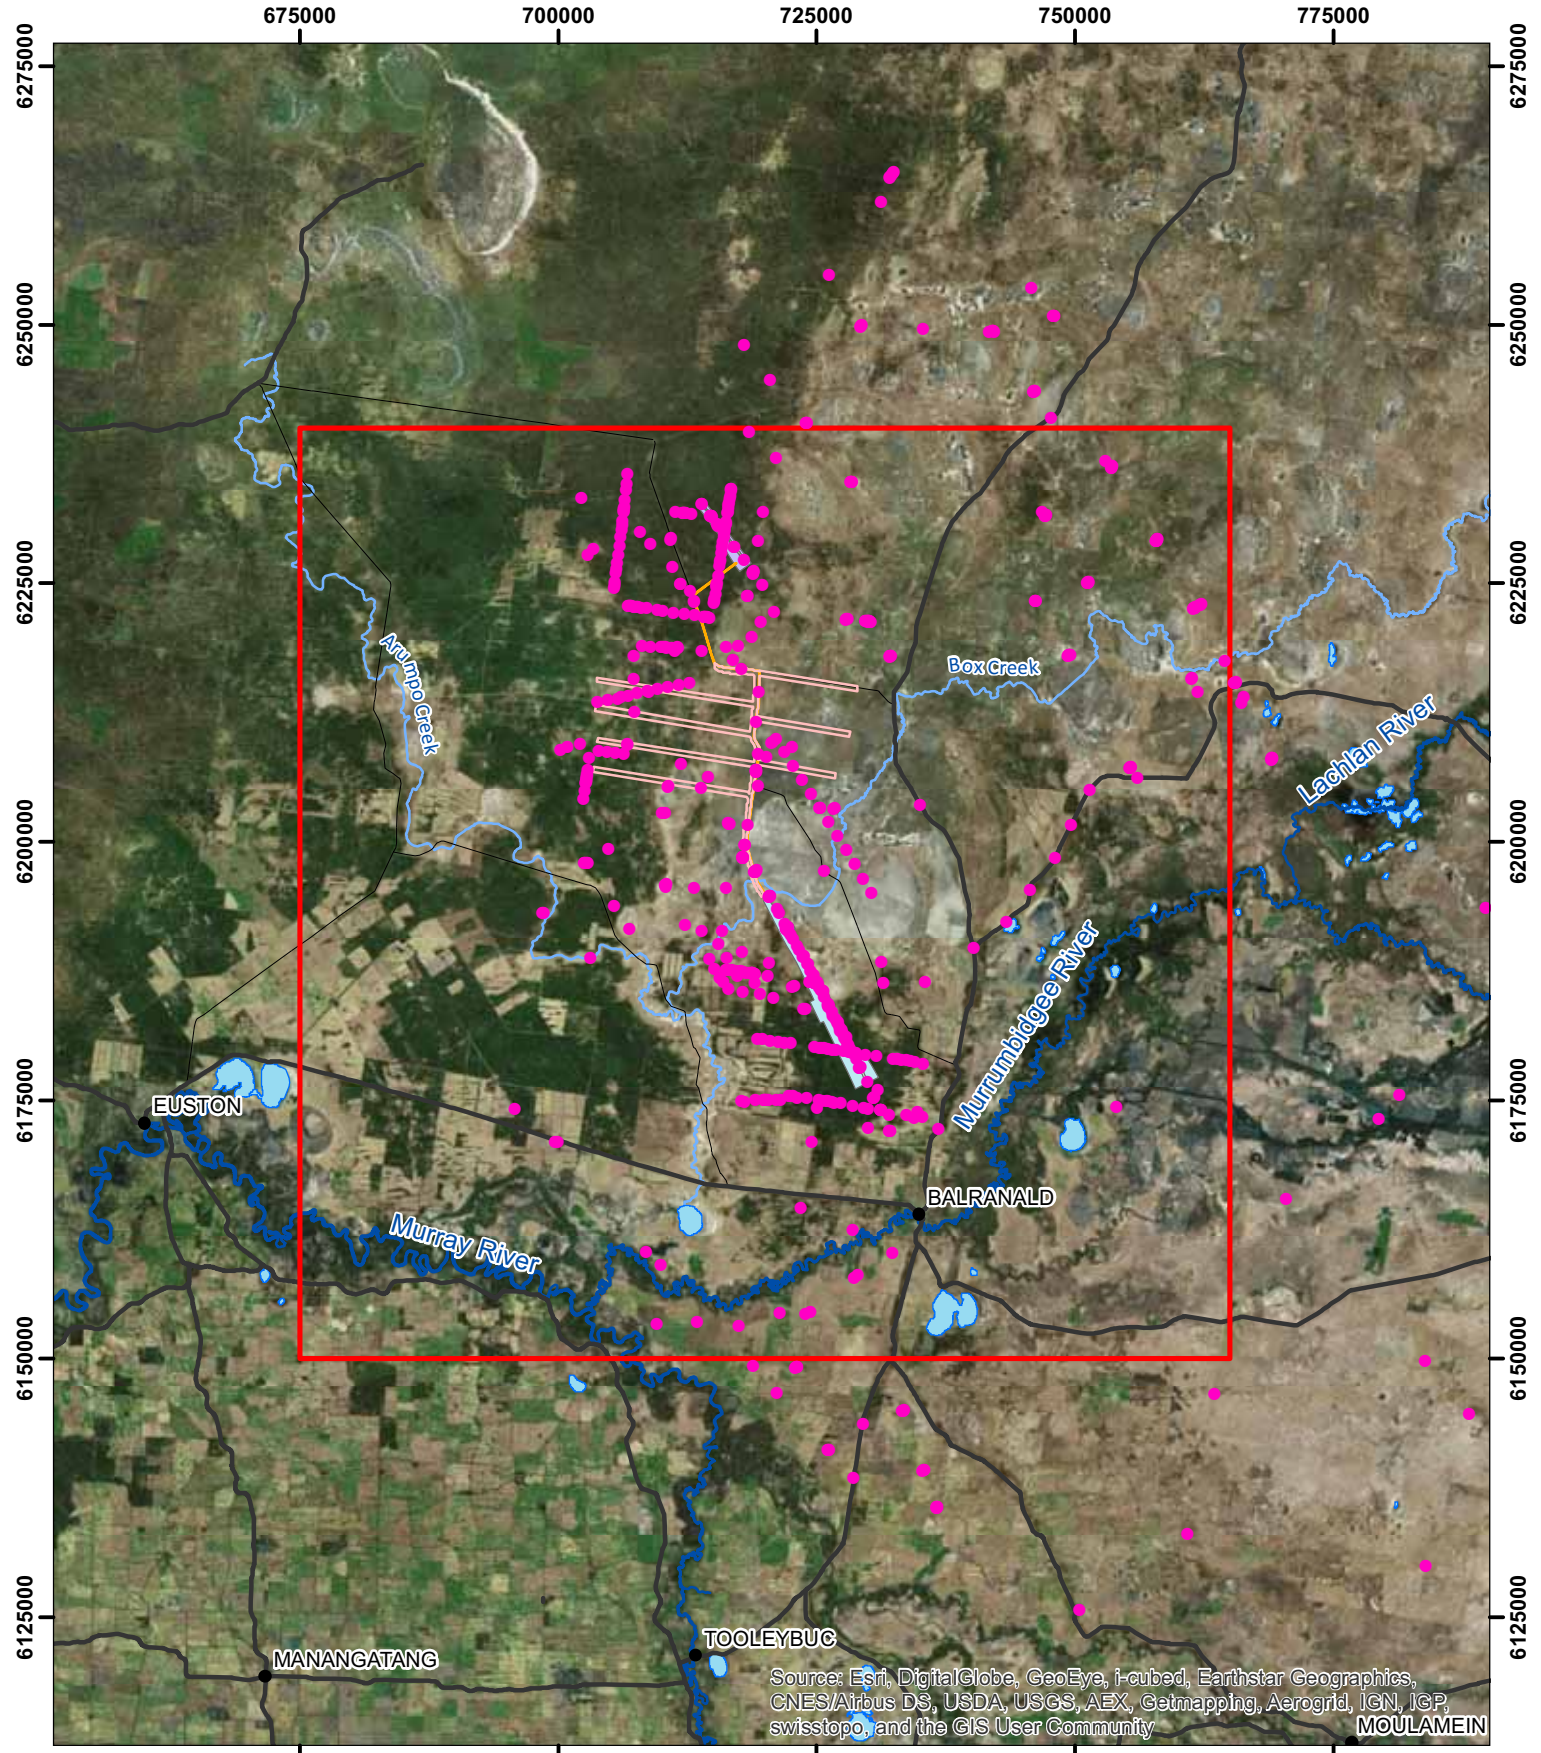

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community
MOULAMEIN


- Town
- Major road
- Minor road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Bore data (632 boreholes)



GDA 1994 MGA Zone 54

Top of LPS1 FS elevation data



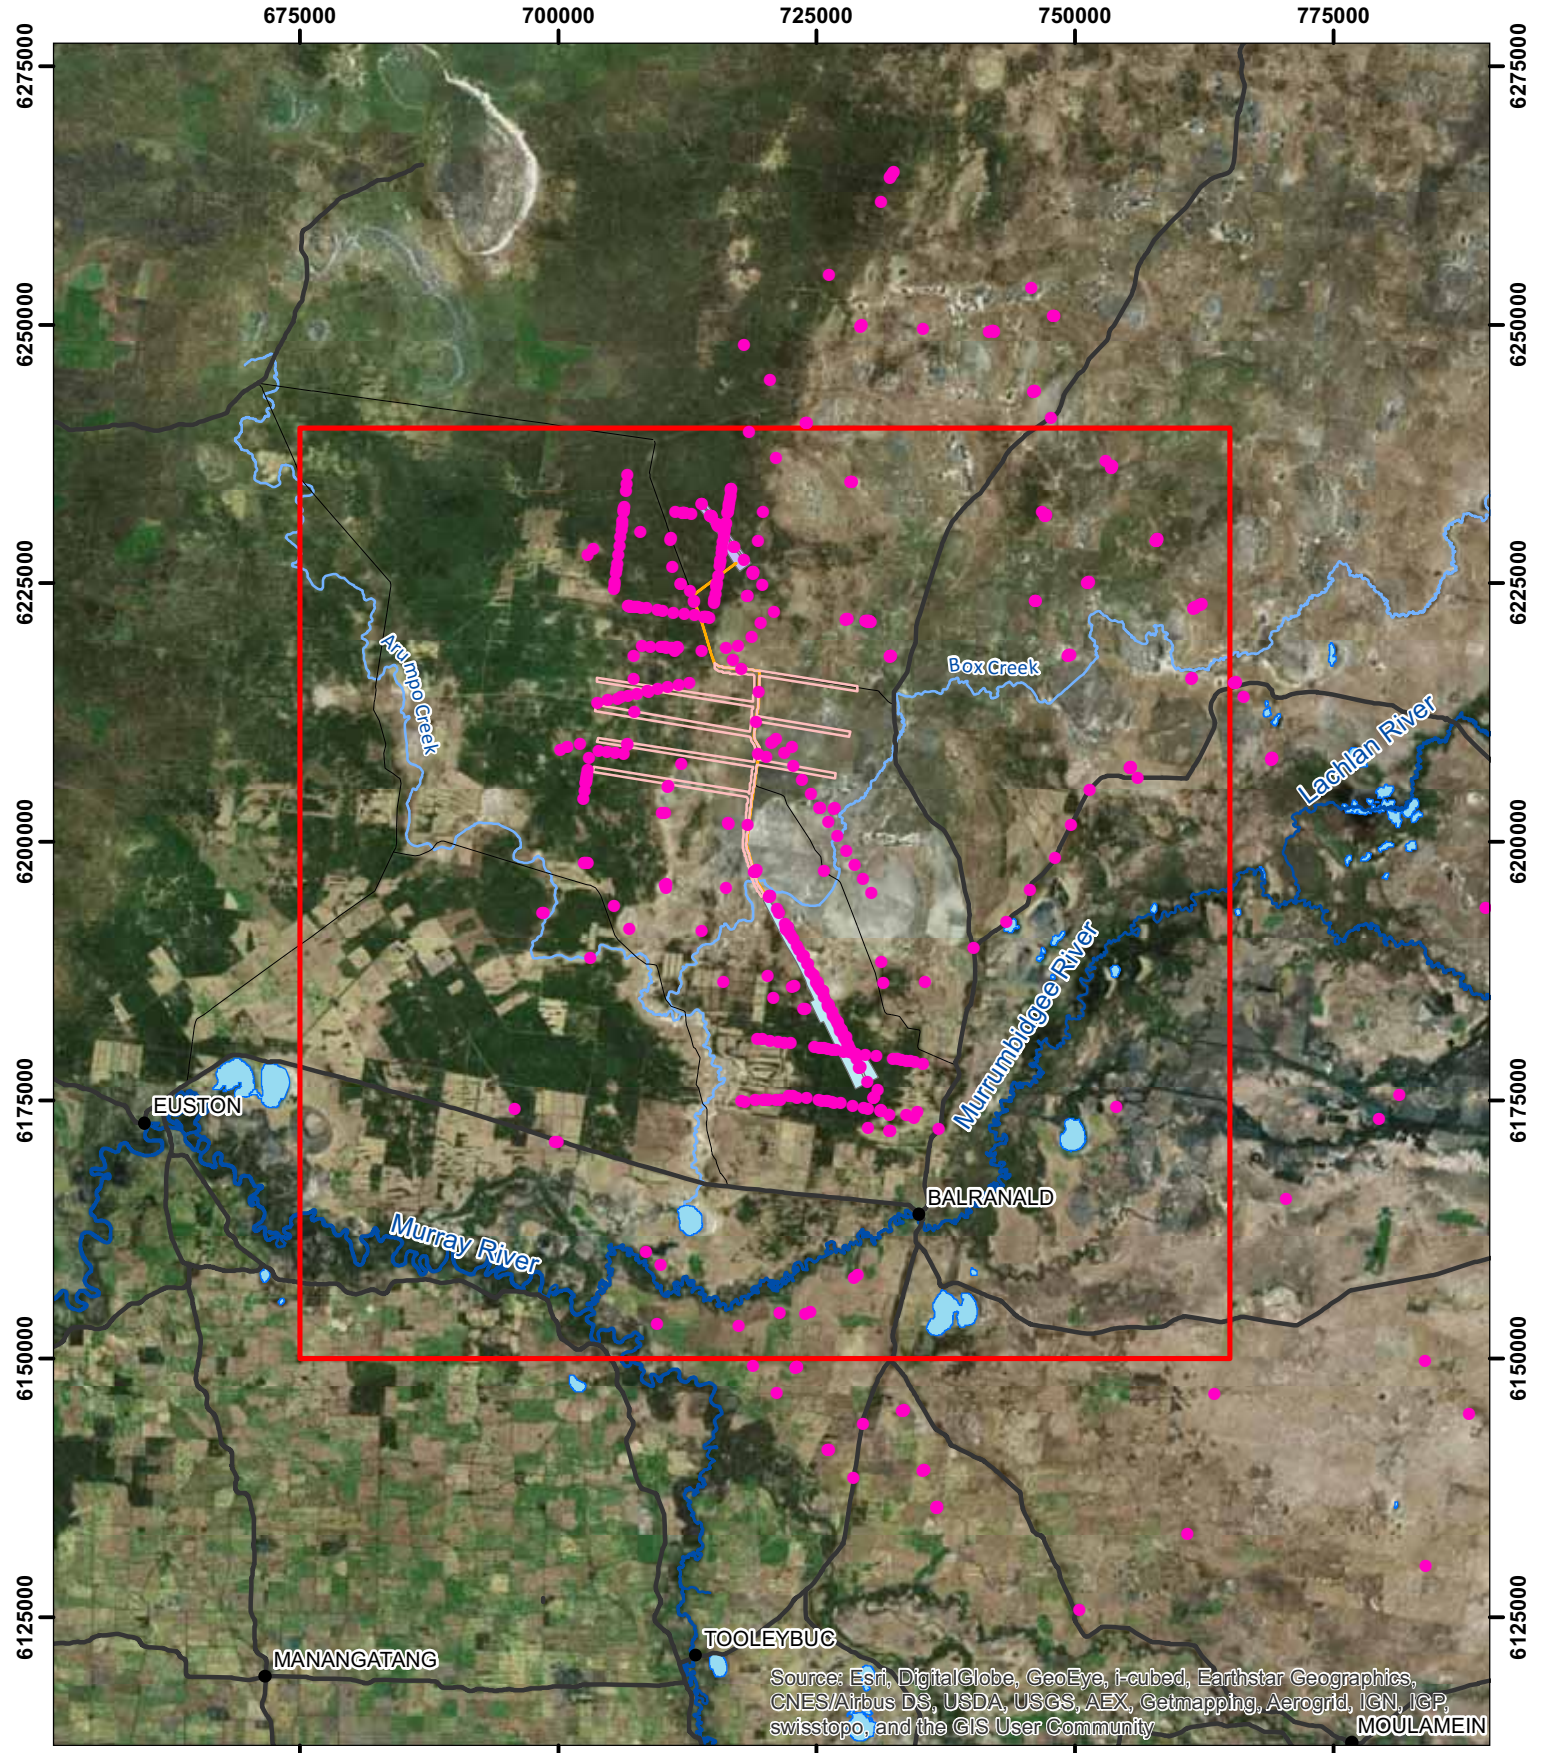


- Town
- Major road
- Minor road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Bore data (546 boreholes)



Top of LPS1 SZ elevation data




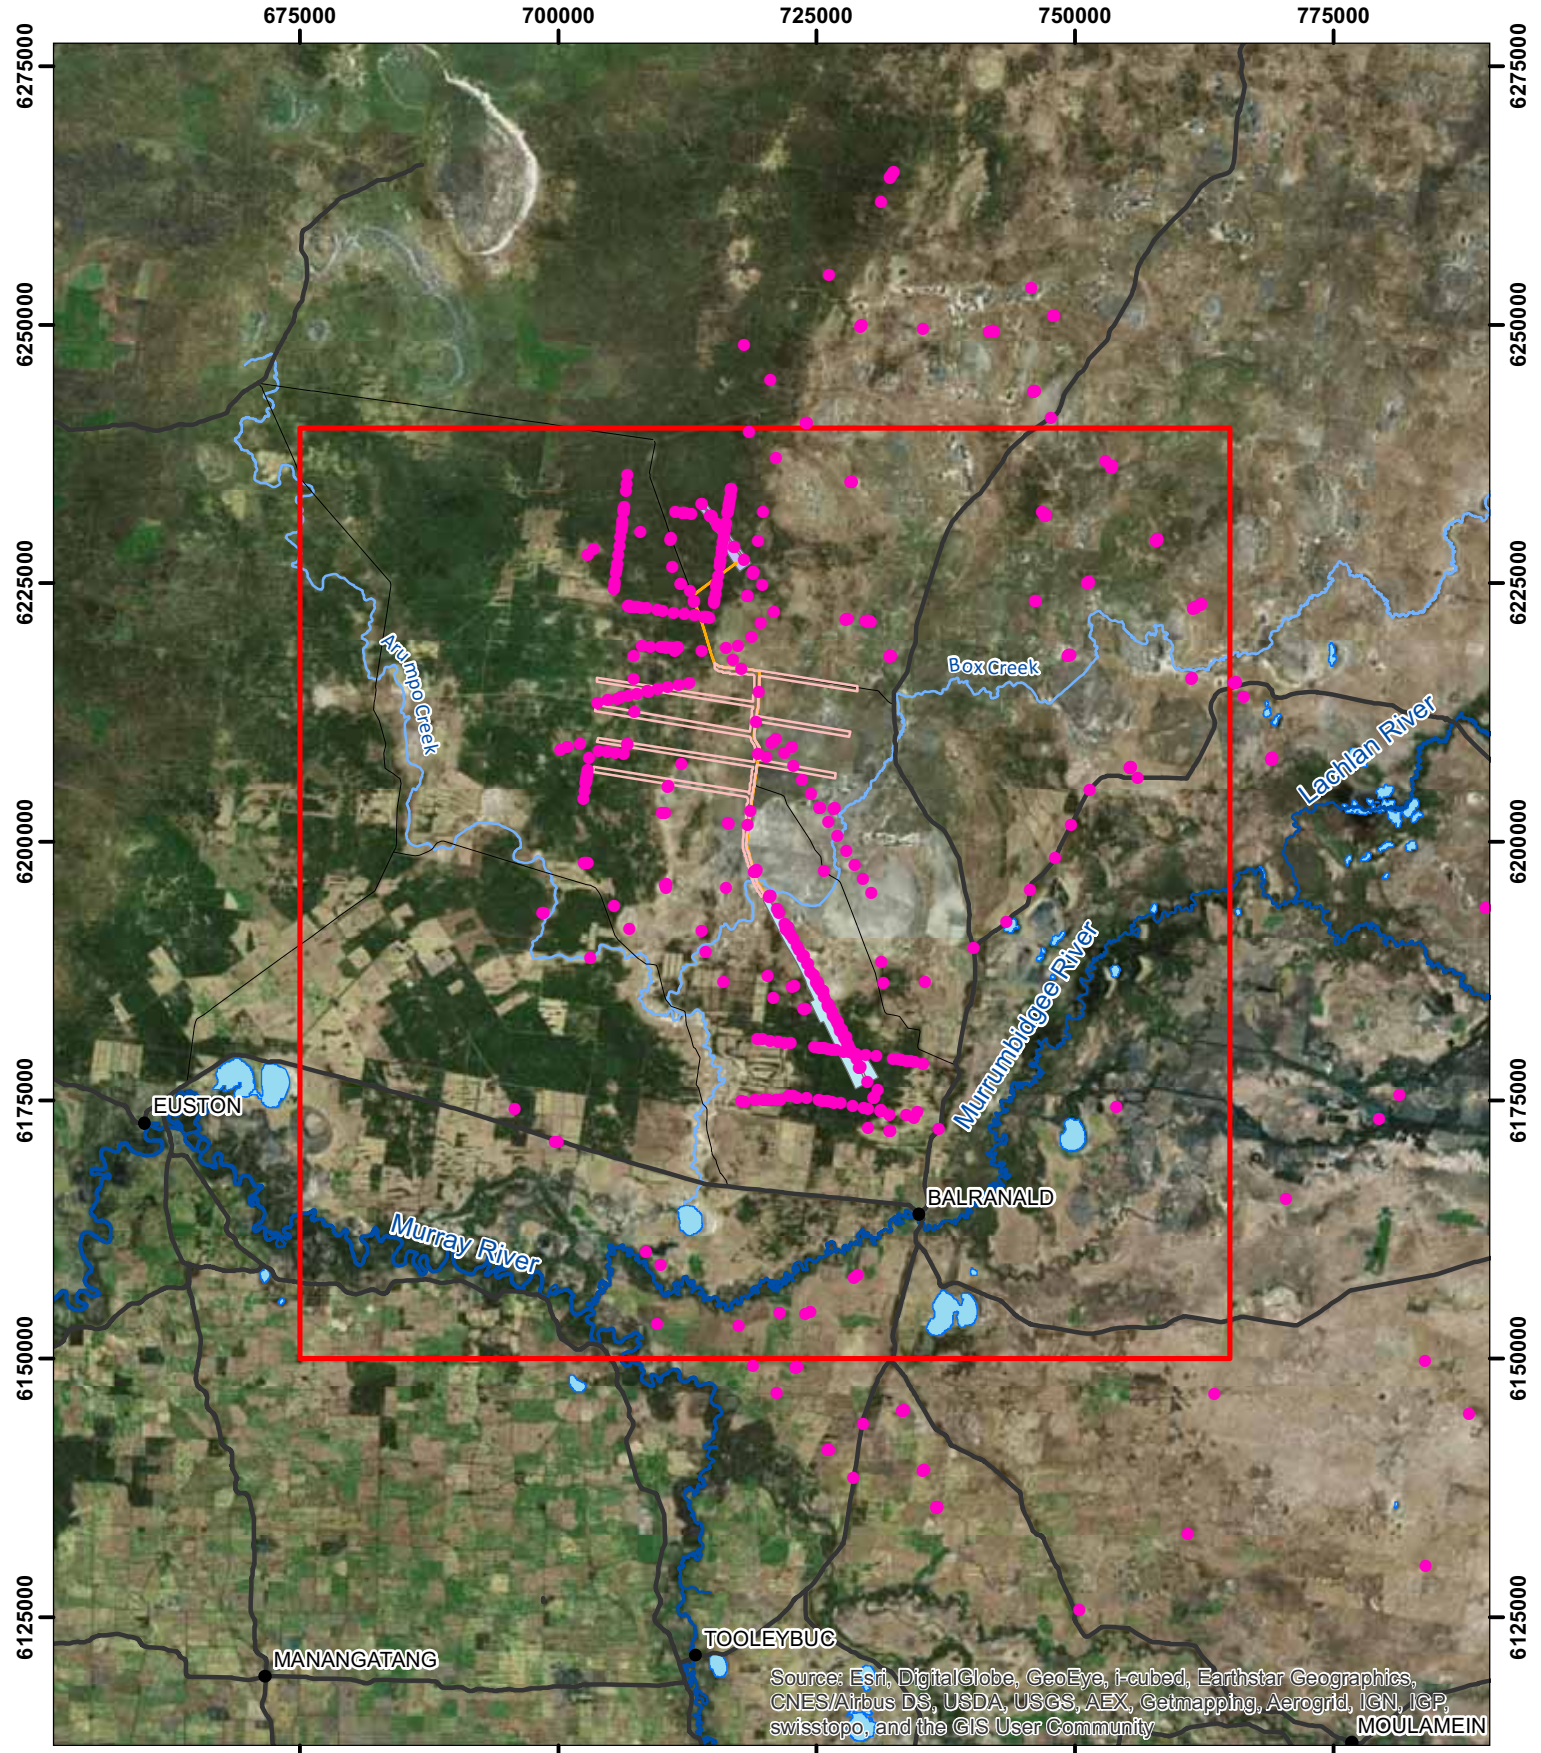

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Bore data (548 boreholes)



Top of LPS1 LS elevation data



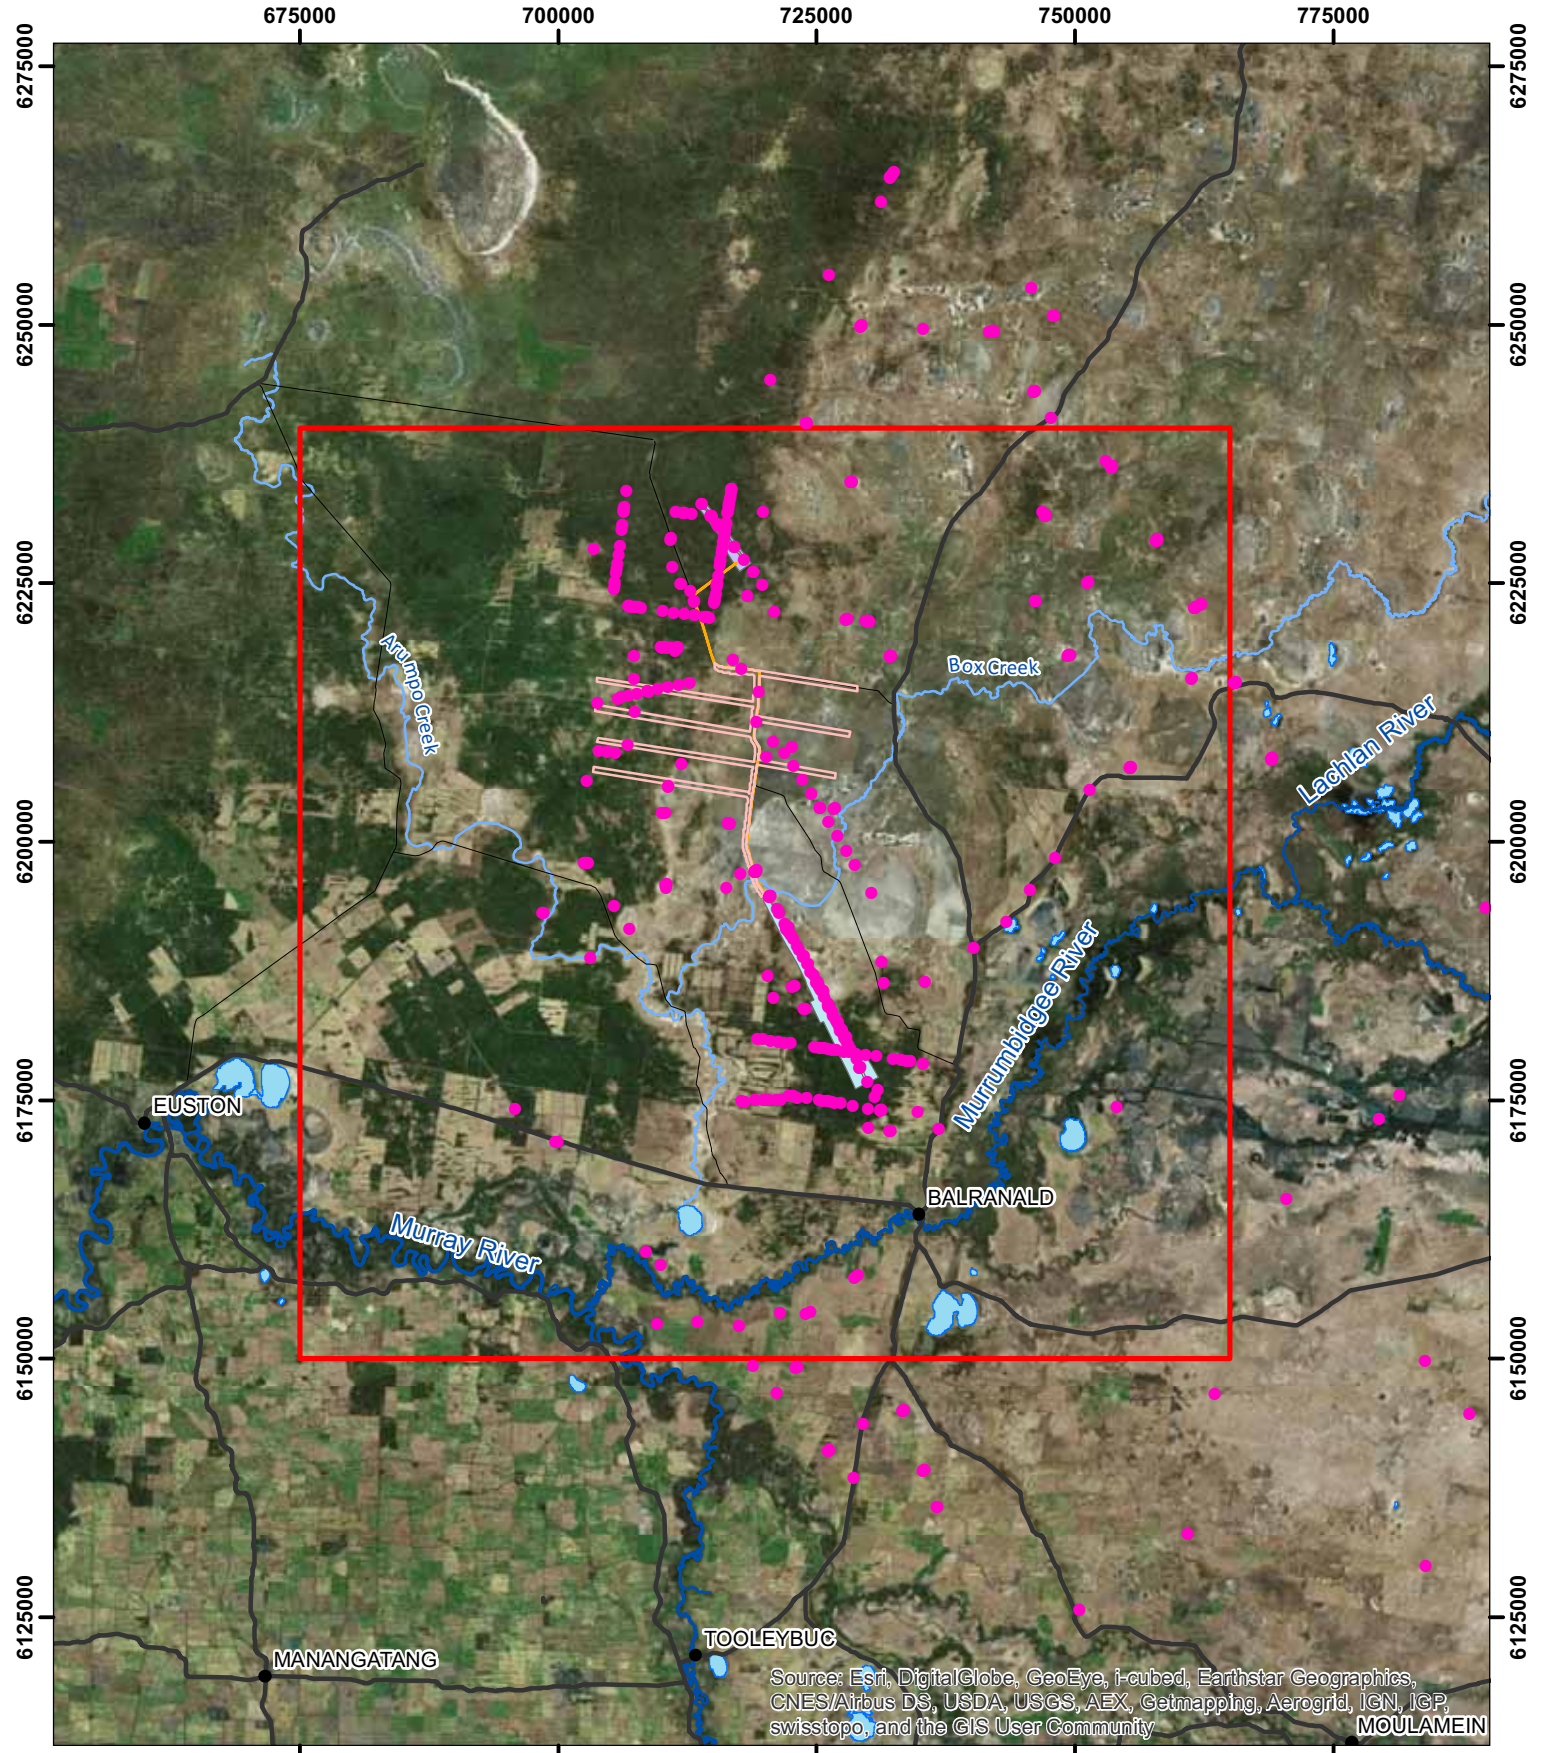

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Bore data (471 boreholes)





Top of LPS2 SZ elevation data



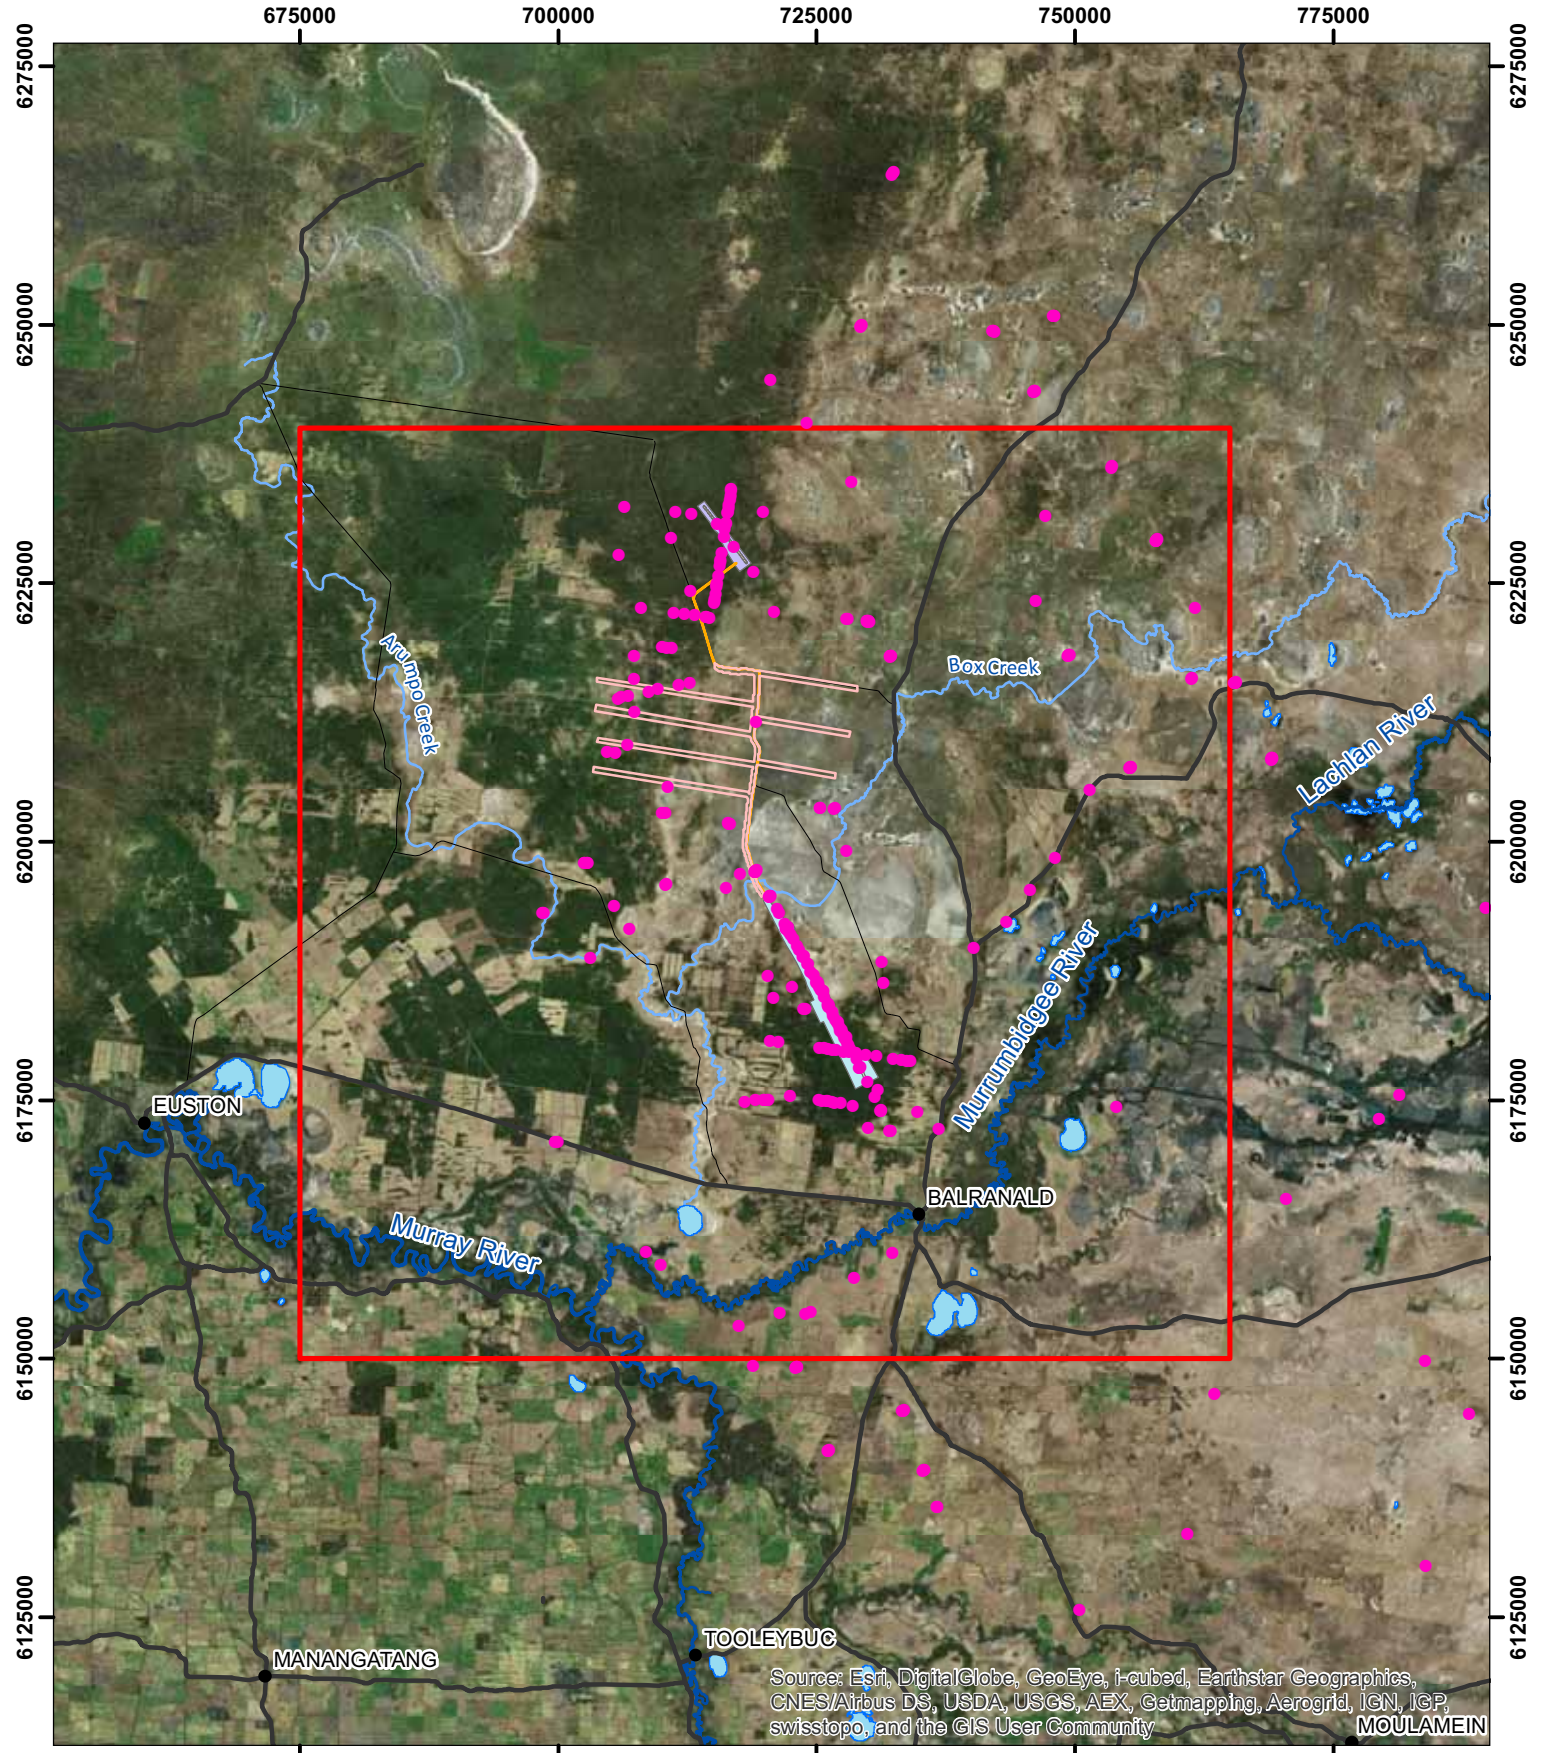

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community
MOULAMEIN


- Town
- Major road
- Minor road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Bore data (309 boreholes)



GDA 1994 MGA Zone 54



Top of LPS2 LS elevation data

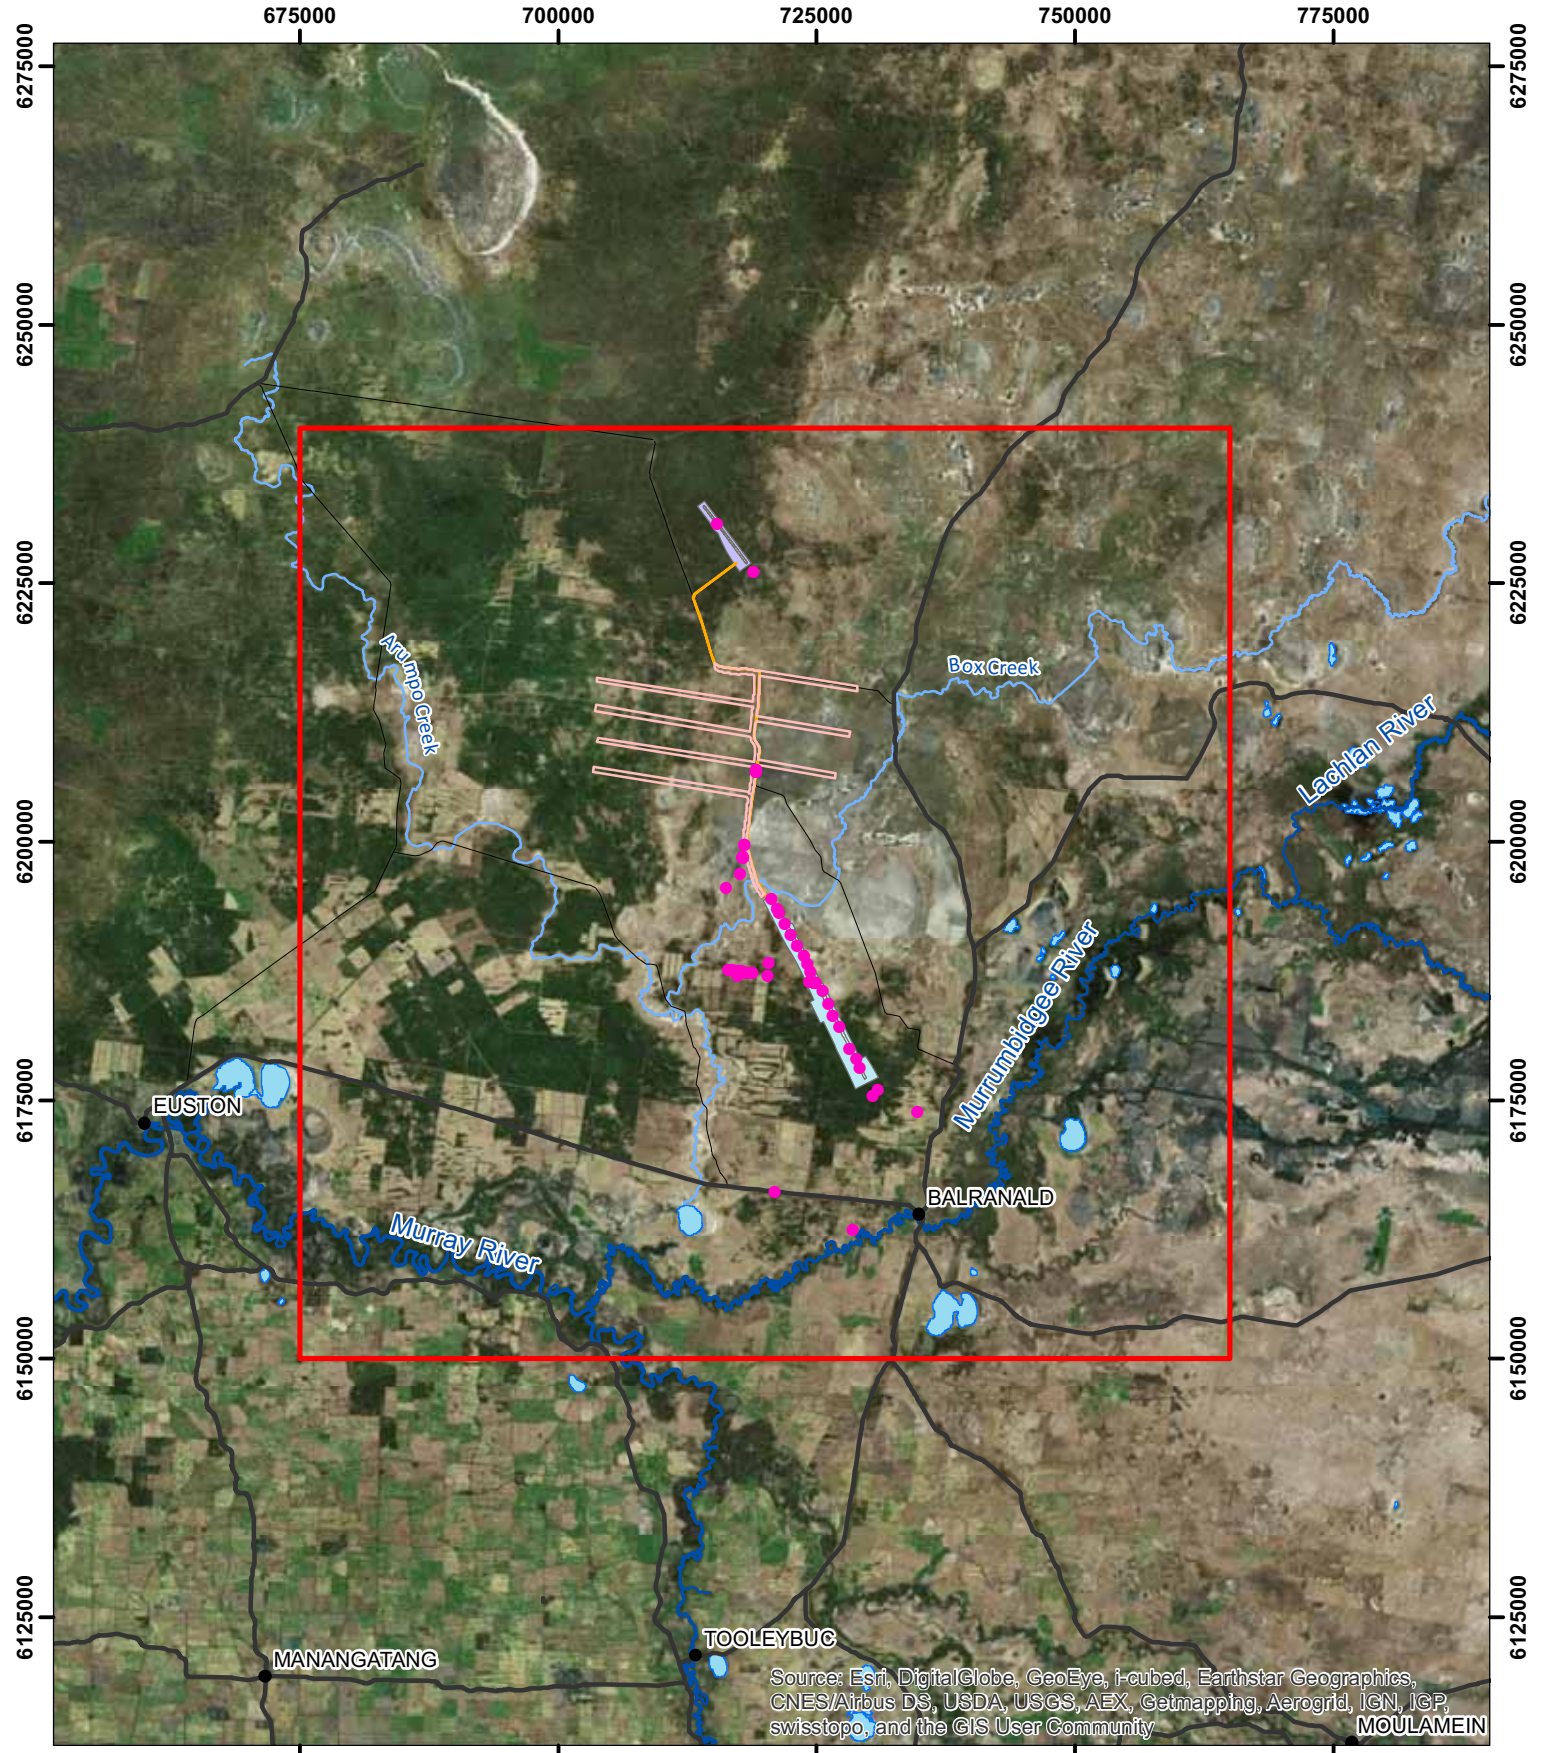

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community
MOULAMEIN


- Town
- Major road
- Minor road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Bore data (61 boreholes)

GDA 1994 MGA Zone 54



Top of Geera Clay elevation data



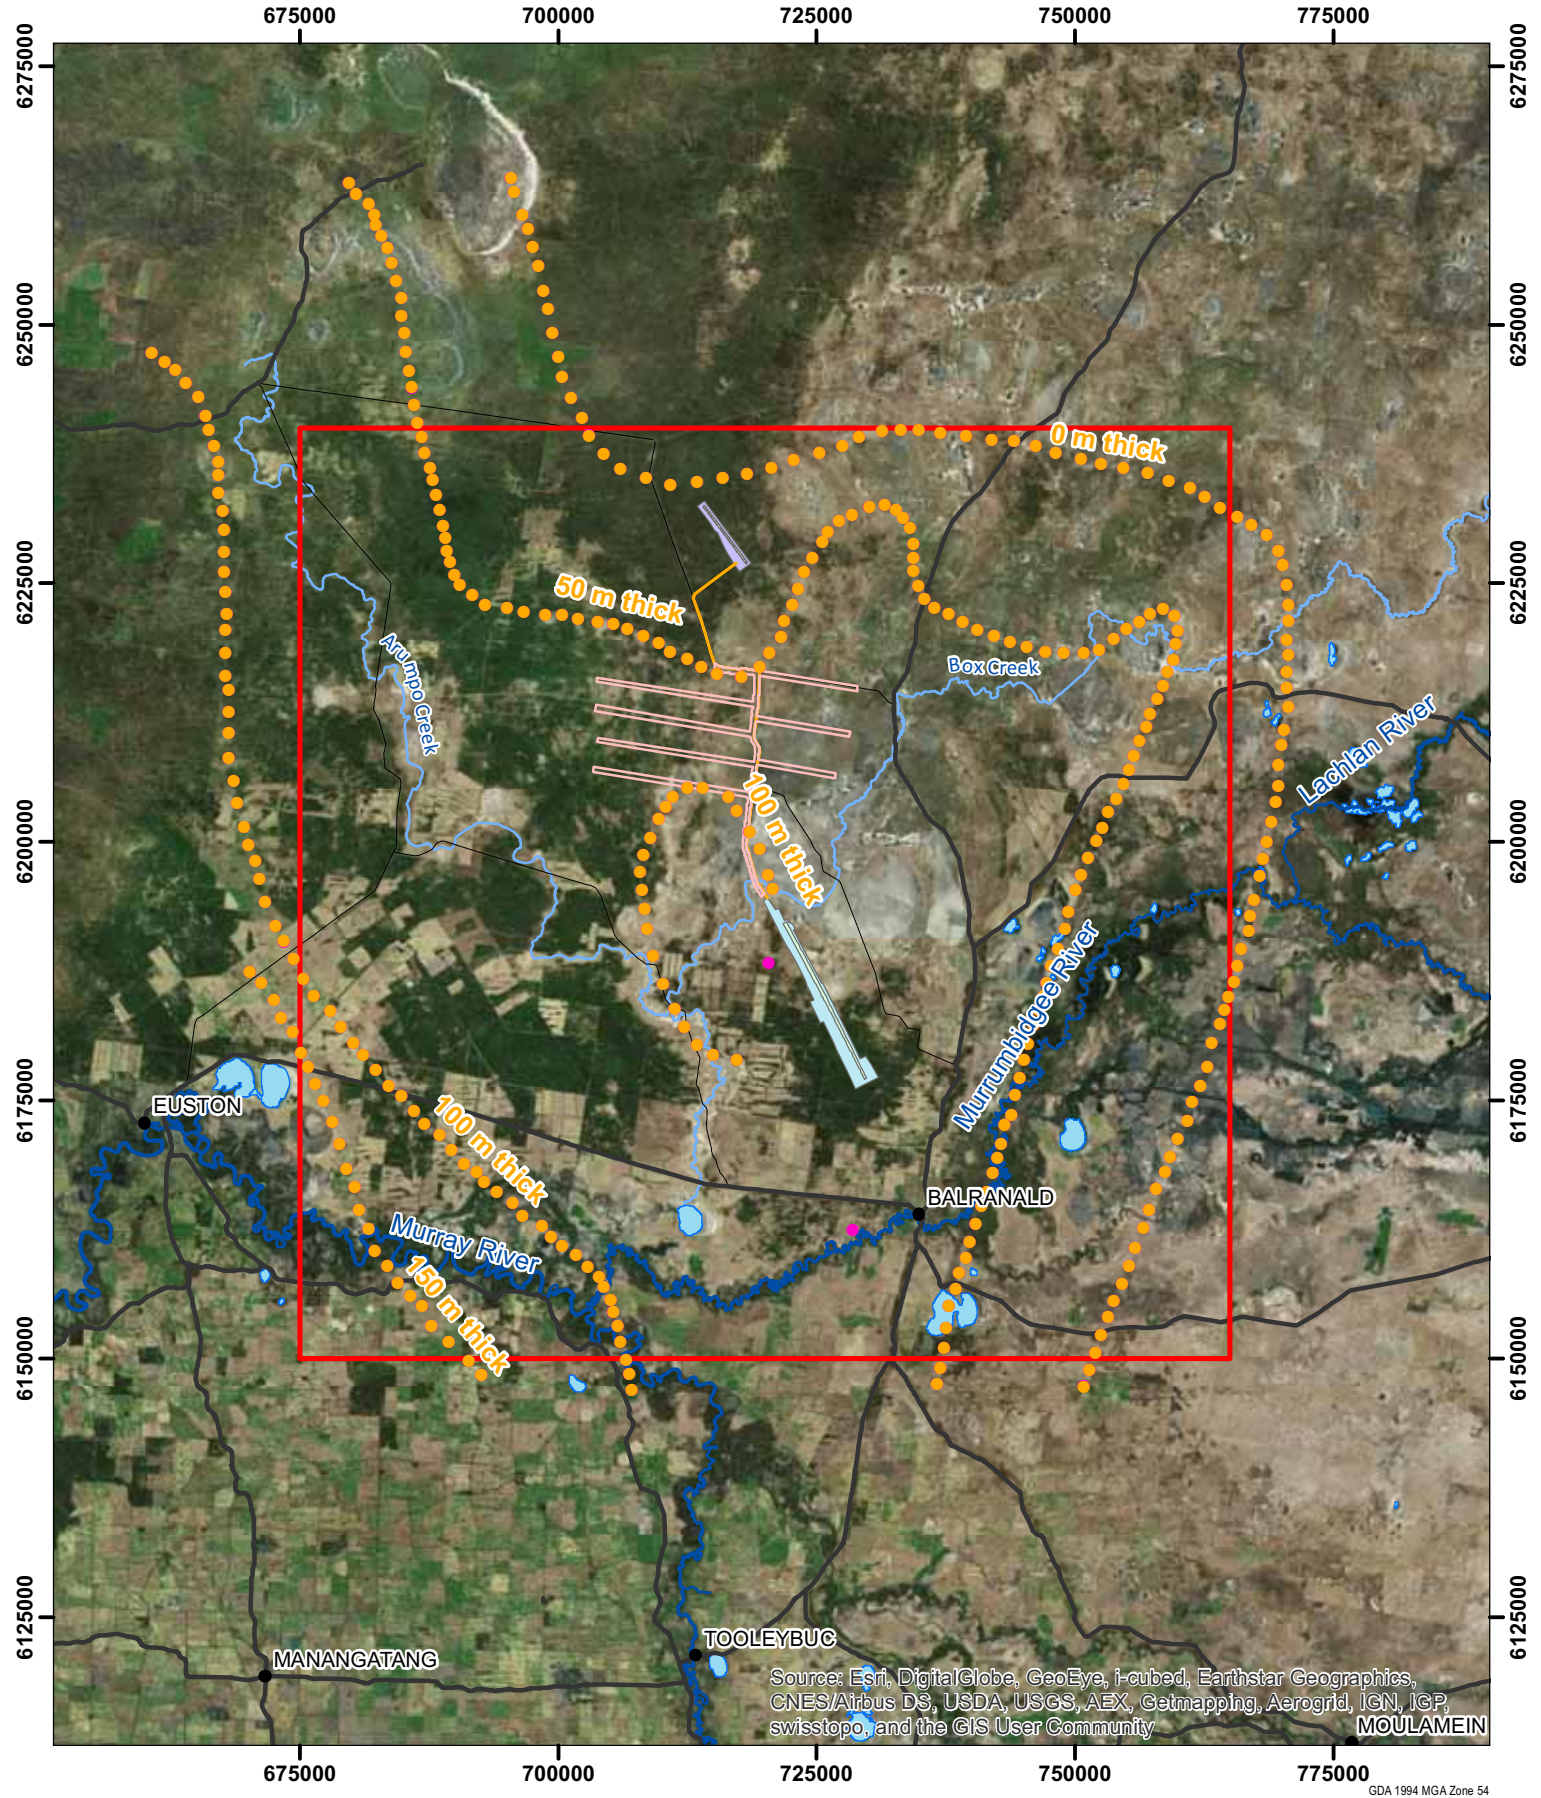

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community
MOULAMEIN


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Bore data (2 boreholes)
- Brown & Stephenson Geera Clay isopachs data



Top of Olney Formation elevation data



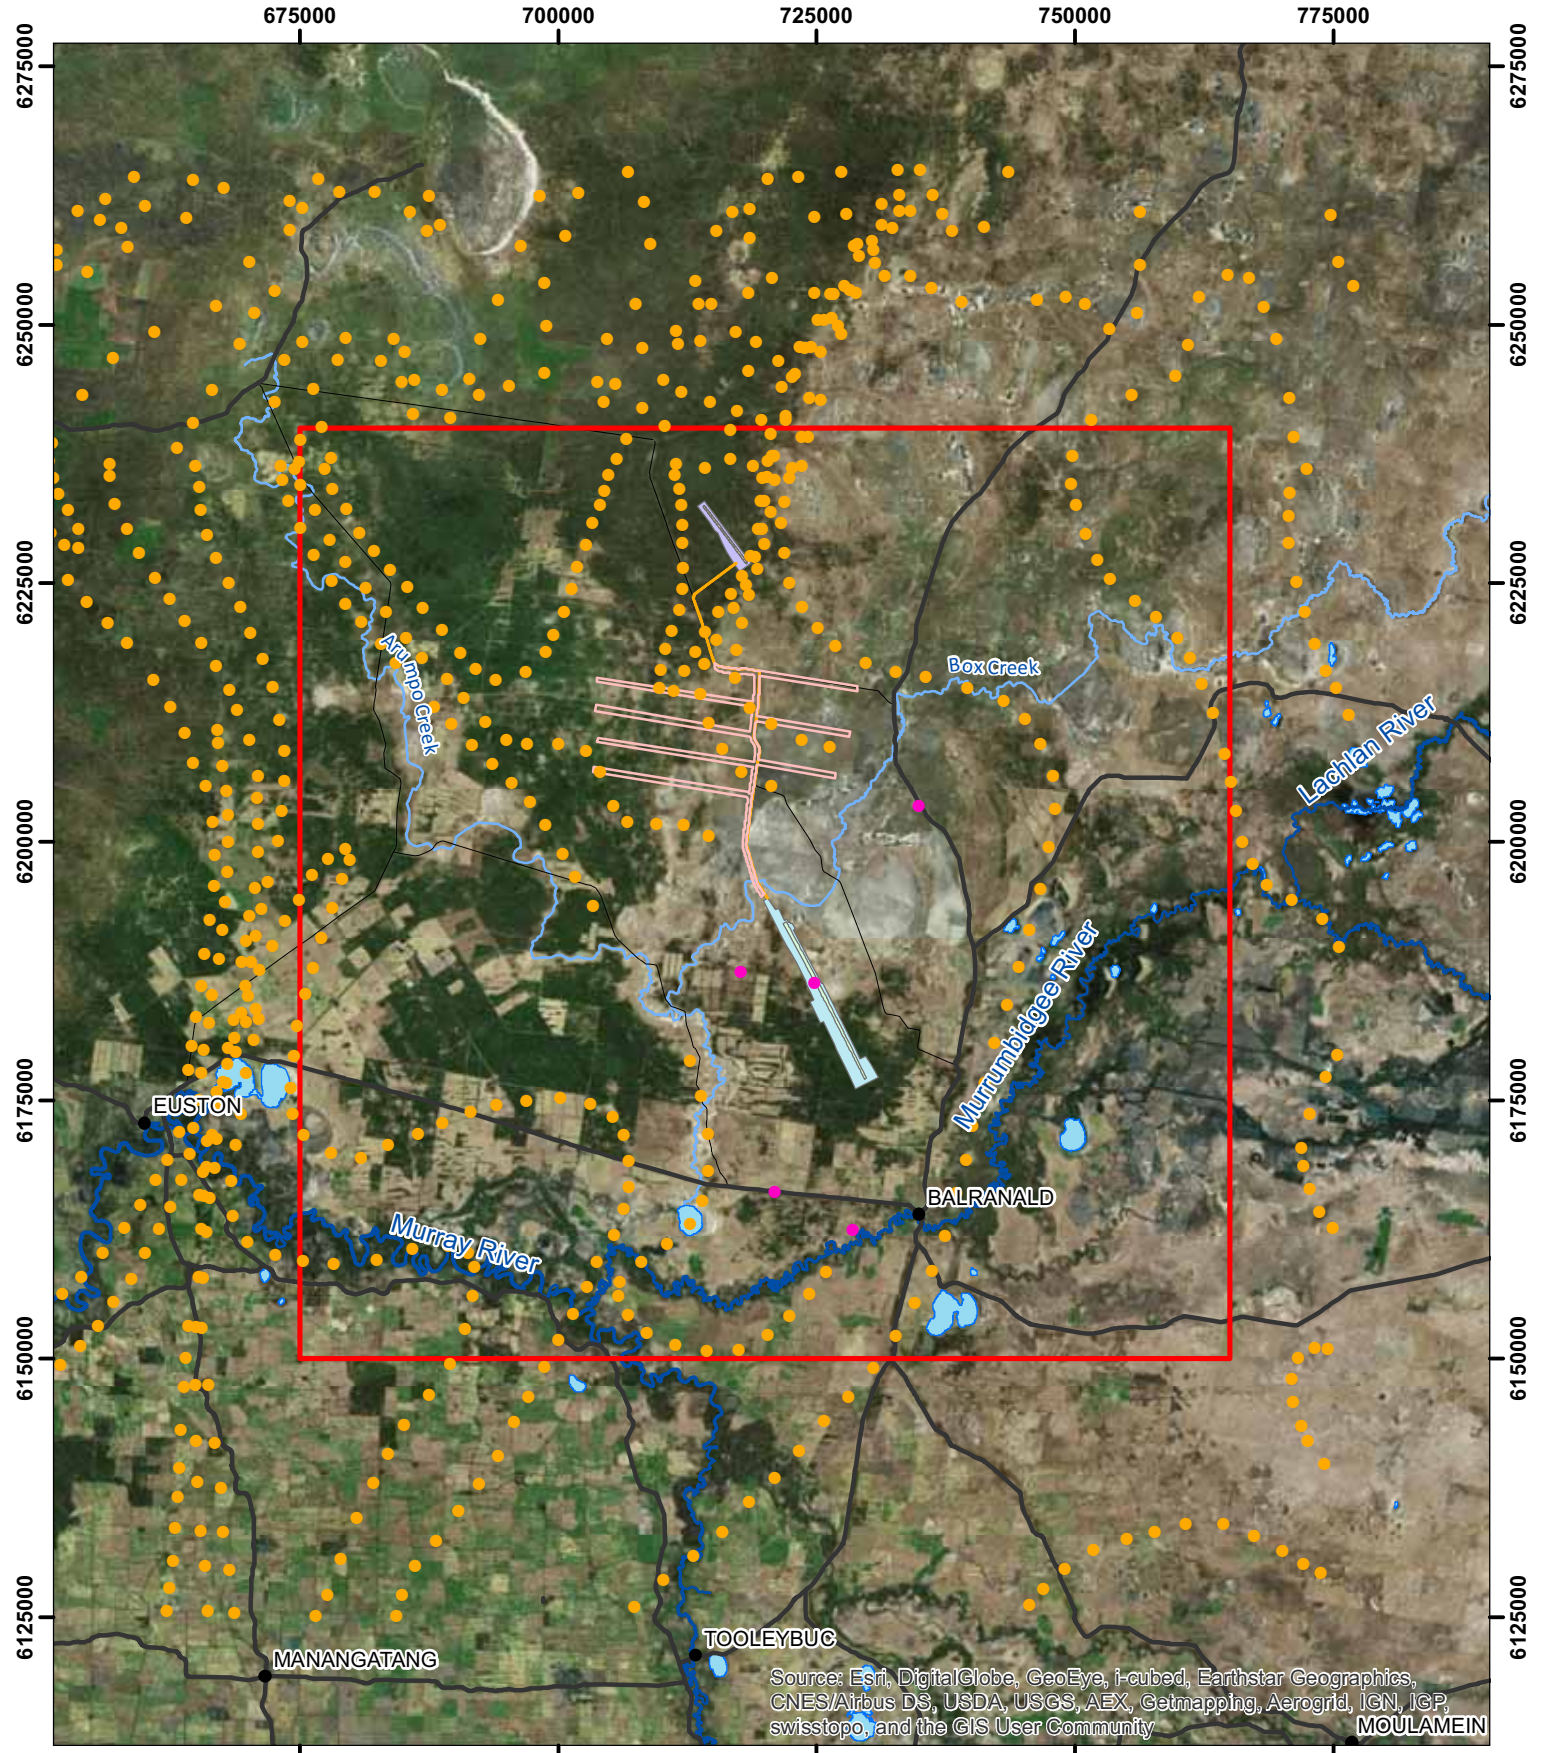

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community
MOULAMEIN

- Town
- Major road
- Minor road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Bore data (5 boreholes)
- Balranald & Pooncarie map sheets data


GDA 1994 MGA Zone 54



Top of Basement elevation data





Appendix C. Model layer elevations and thicknesses

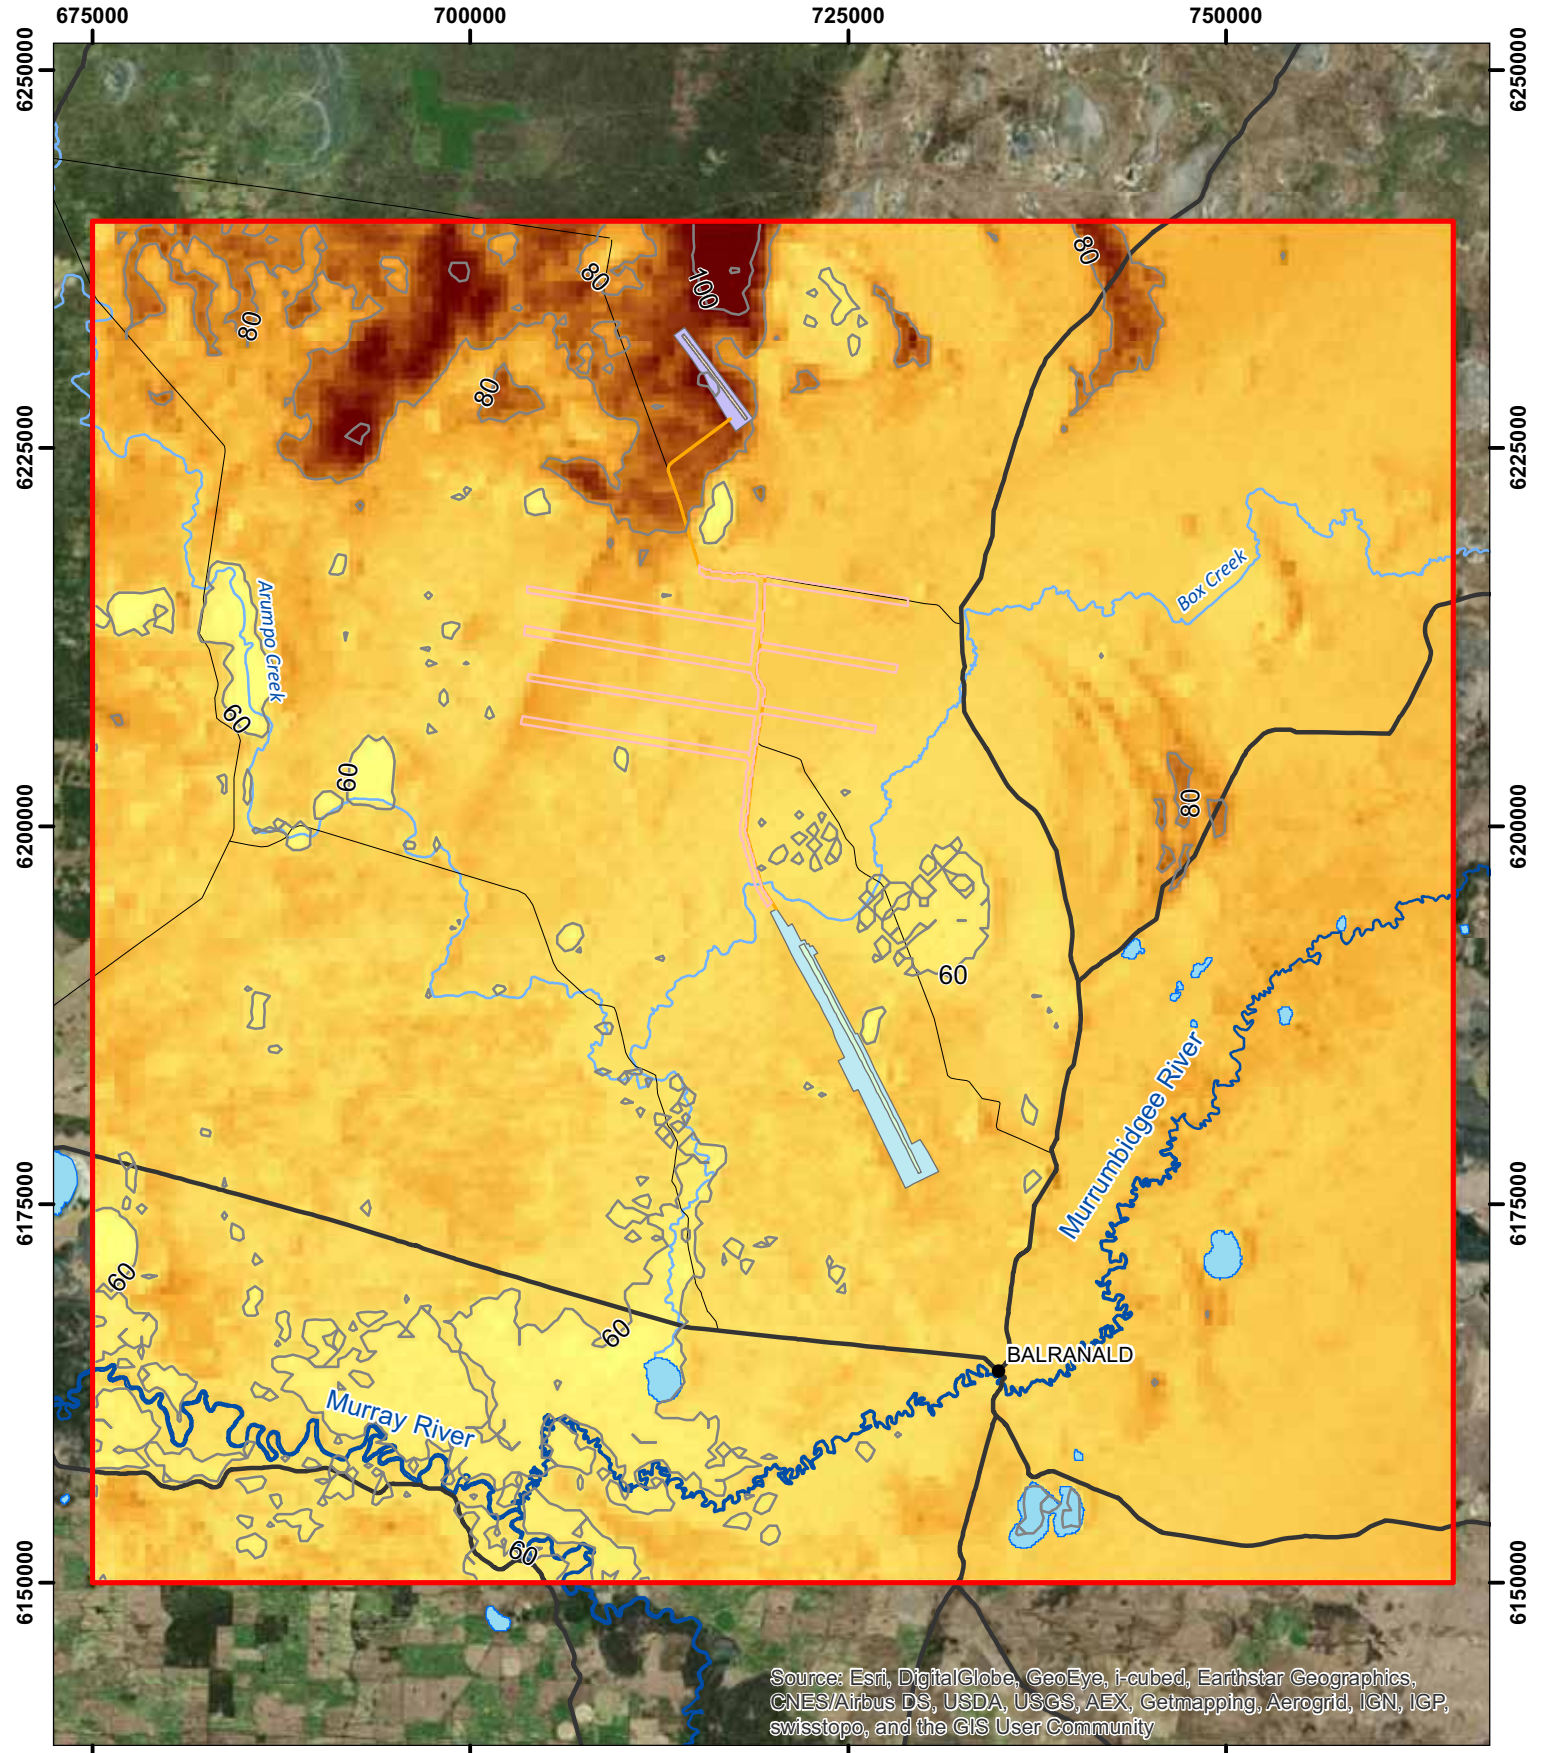


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contours (mAHd)





BAL2.0 top of Shepparton Formation (shallow) (layer 1)



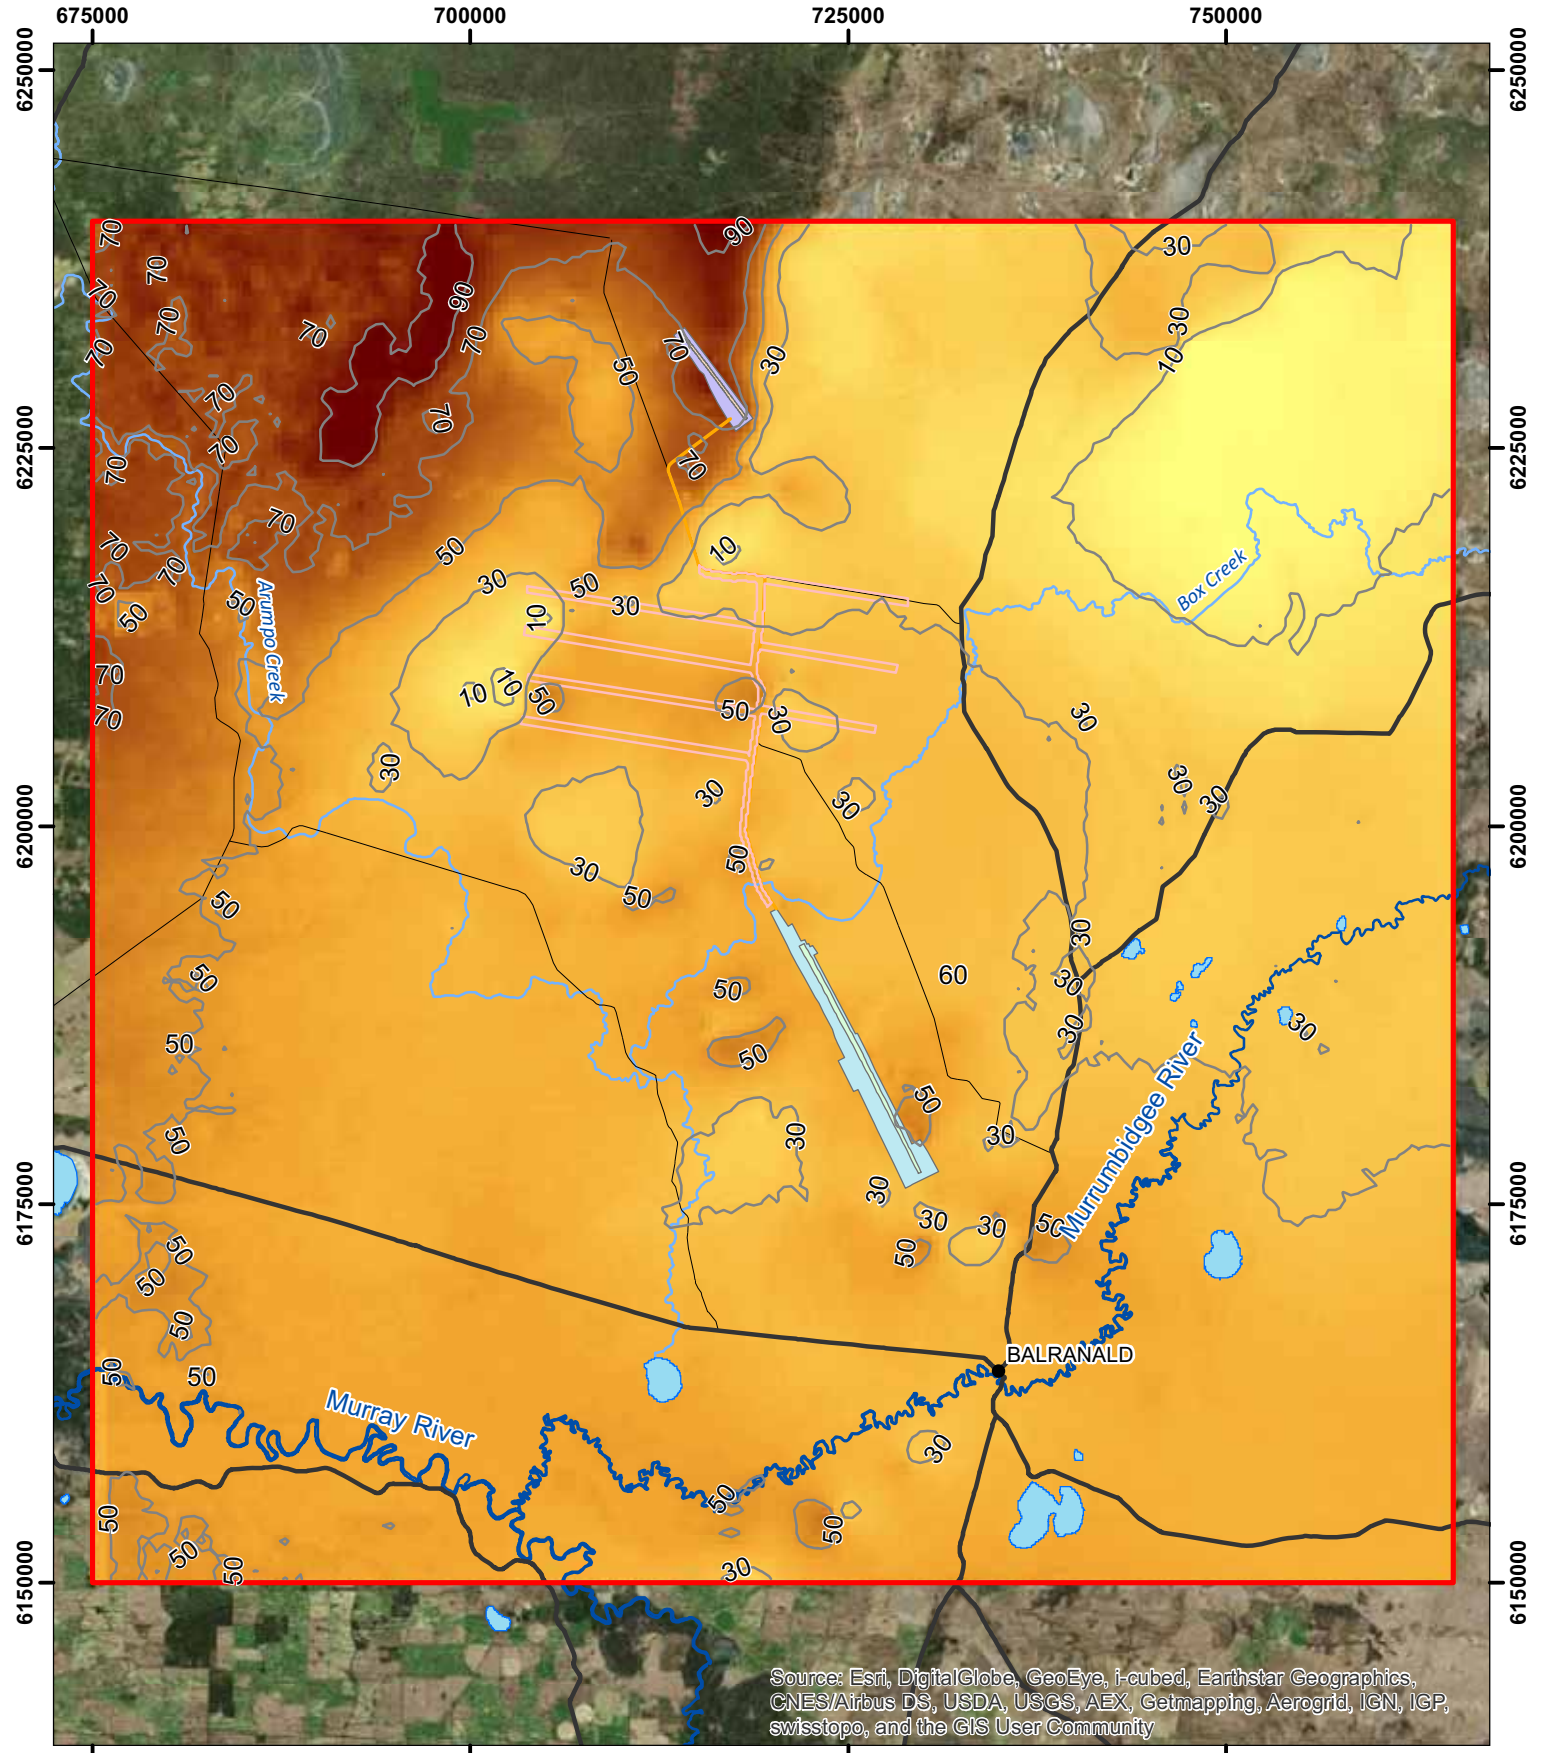


- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contours (mAHD)





BAL2.0 top of Shepparton Formation (deep) (layer 2)



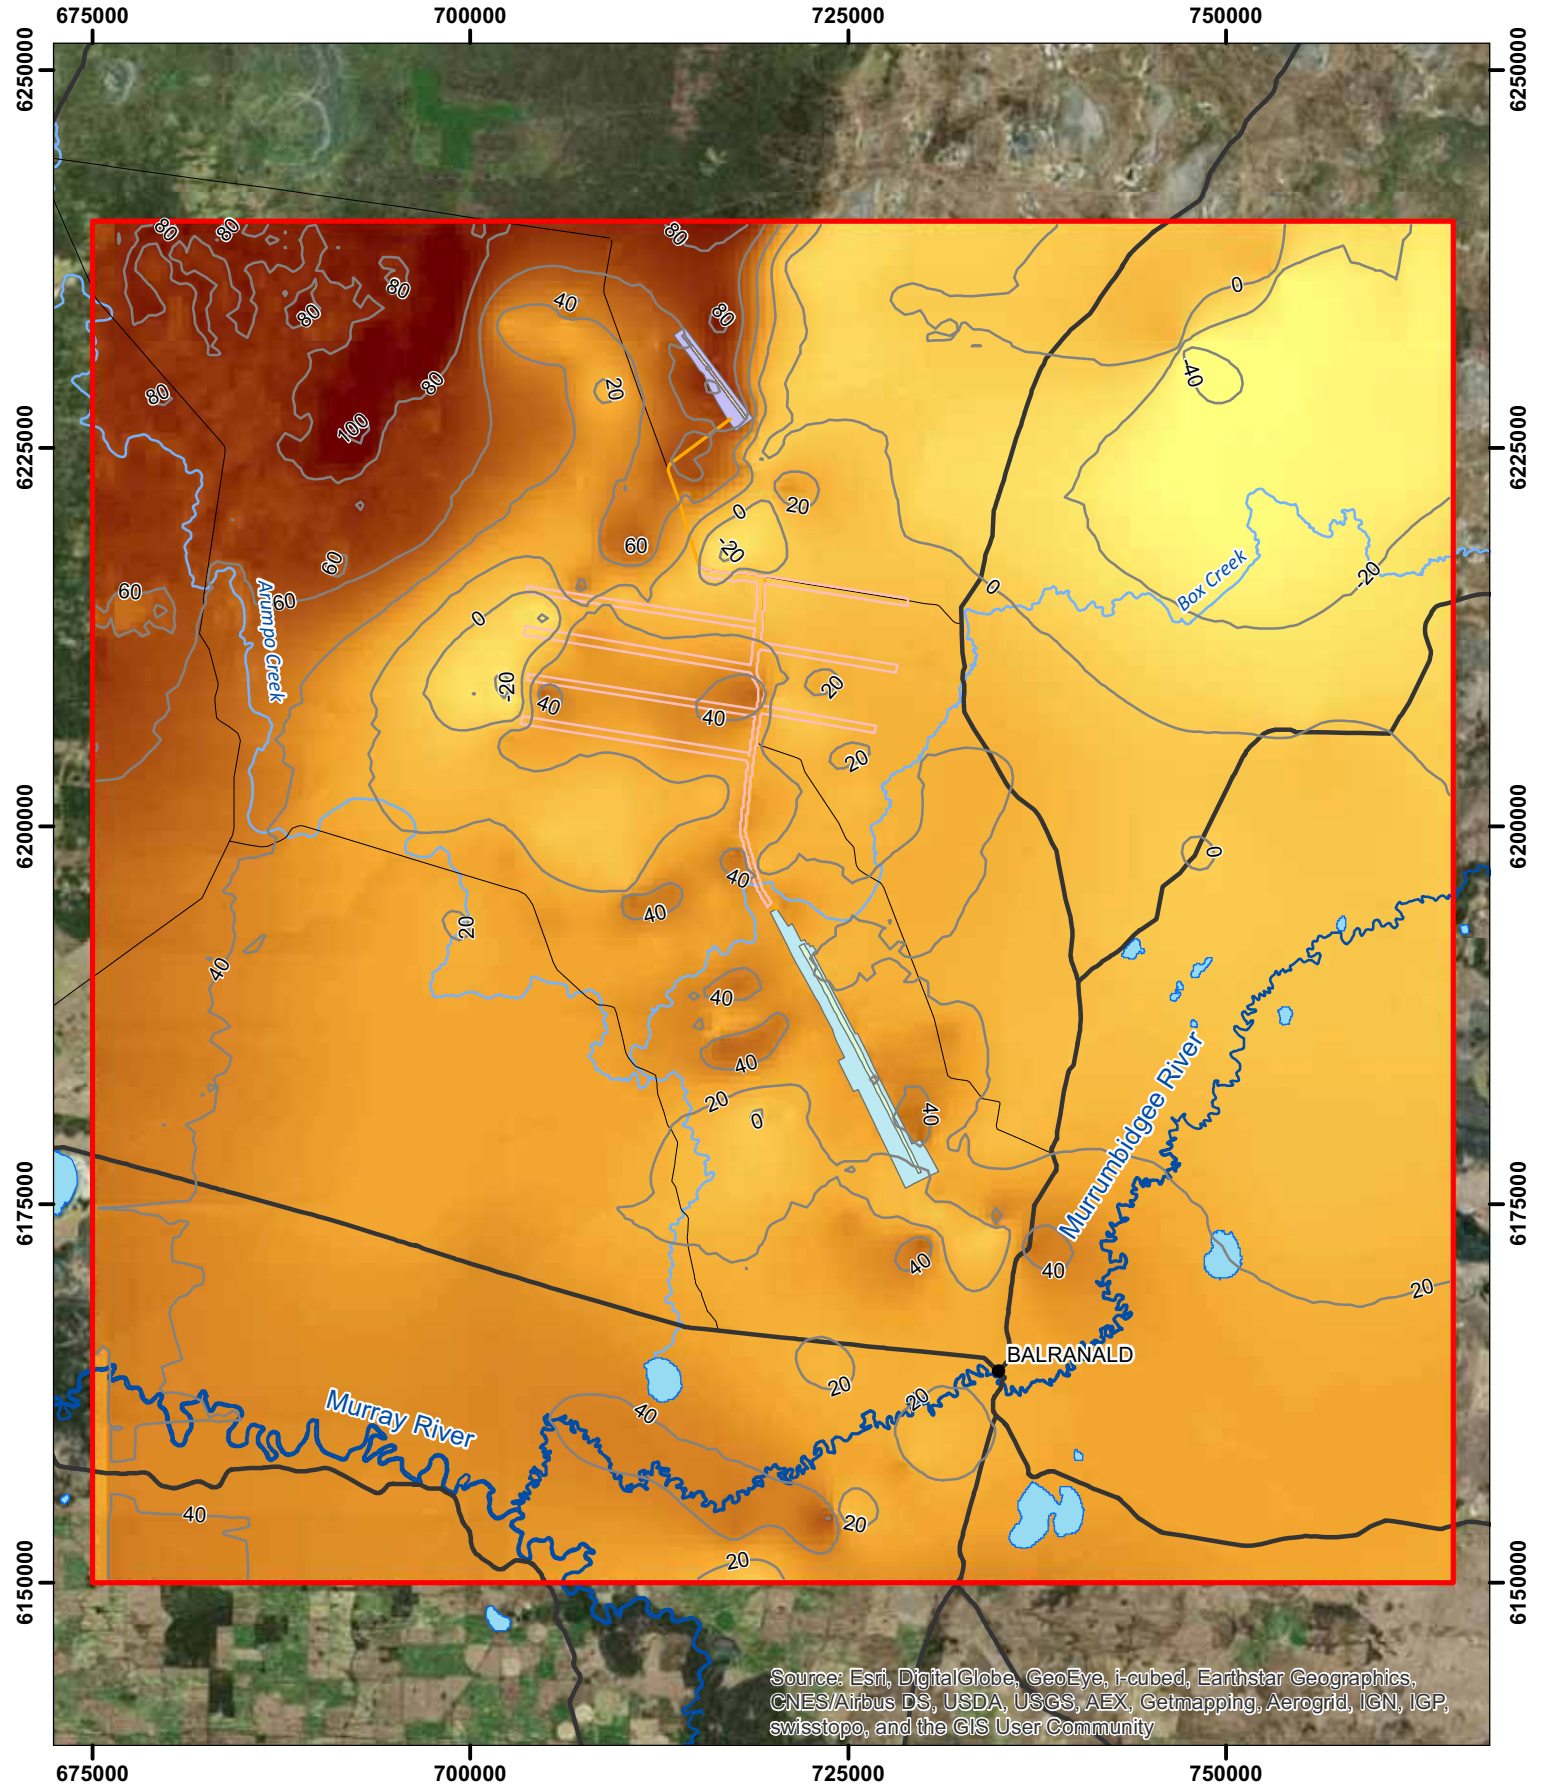


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contour (mAHD)
- Elevation (mAHD)
High : 103
Low : -45



BAL2.0 top of LPS1 FS (Layer 3)

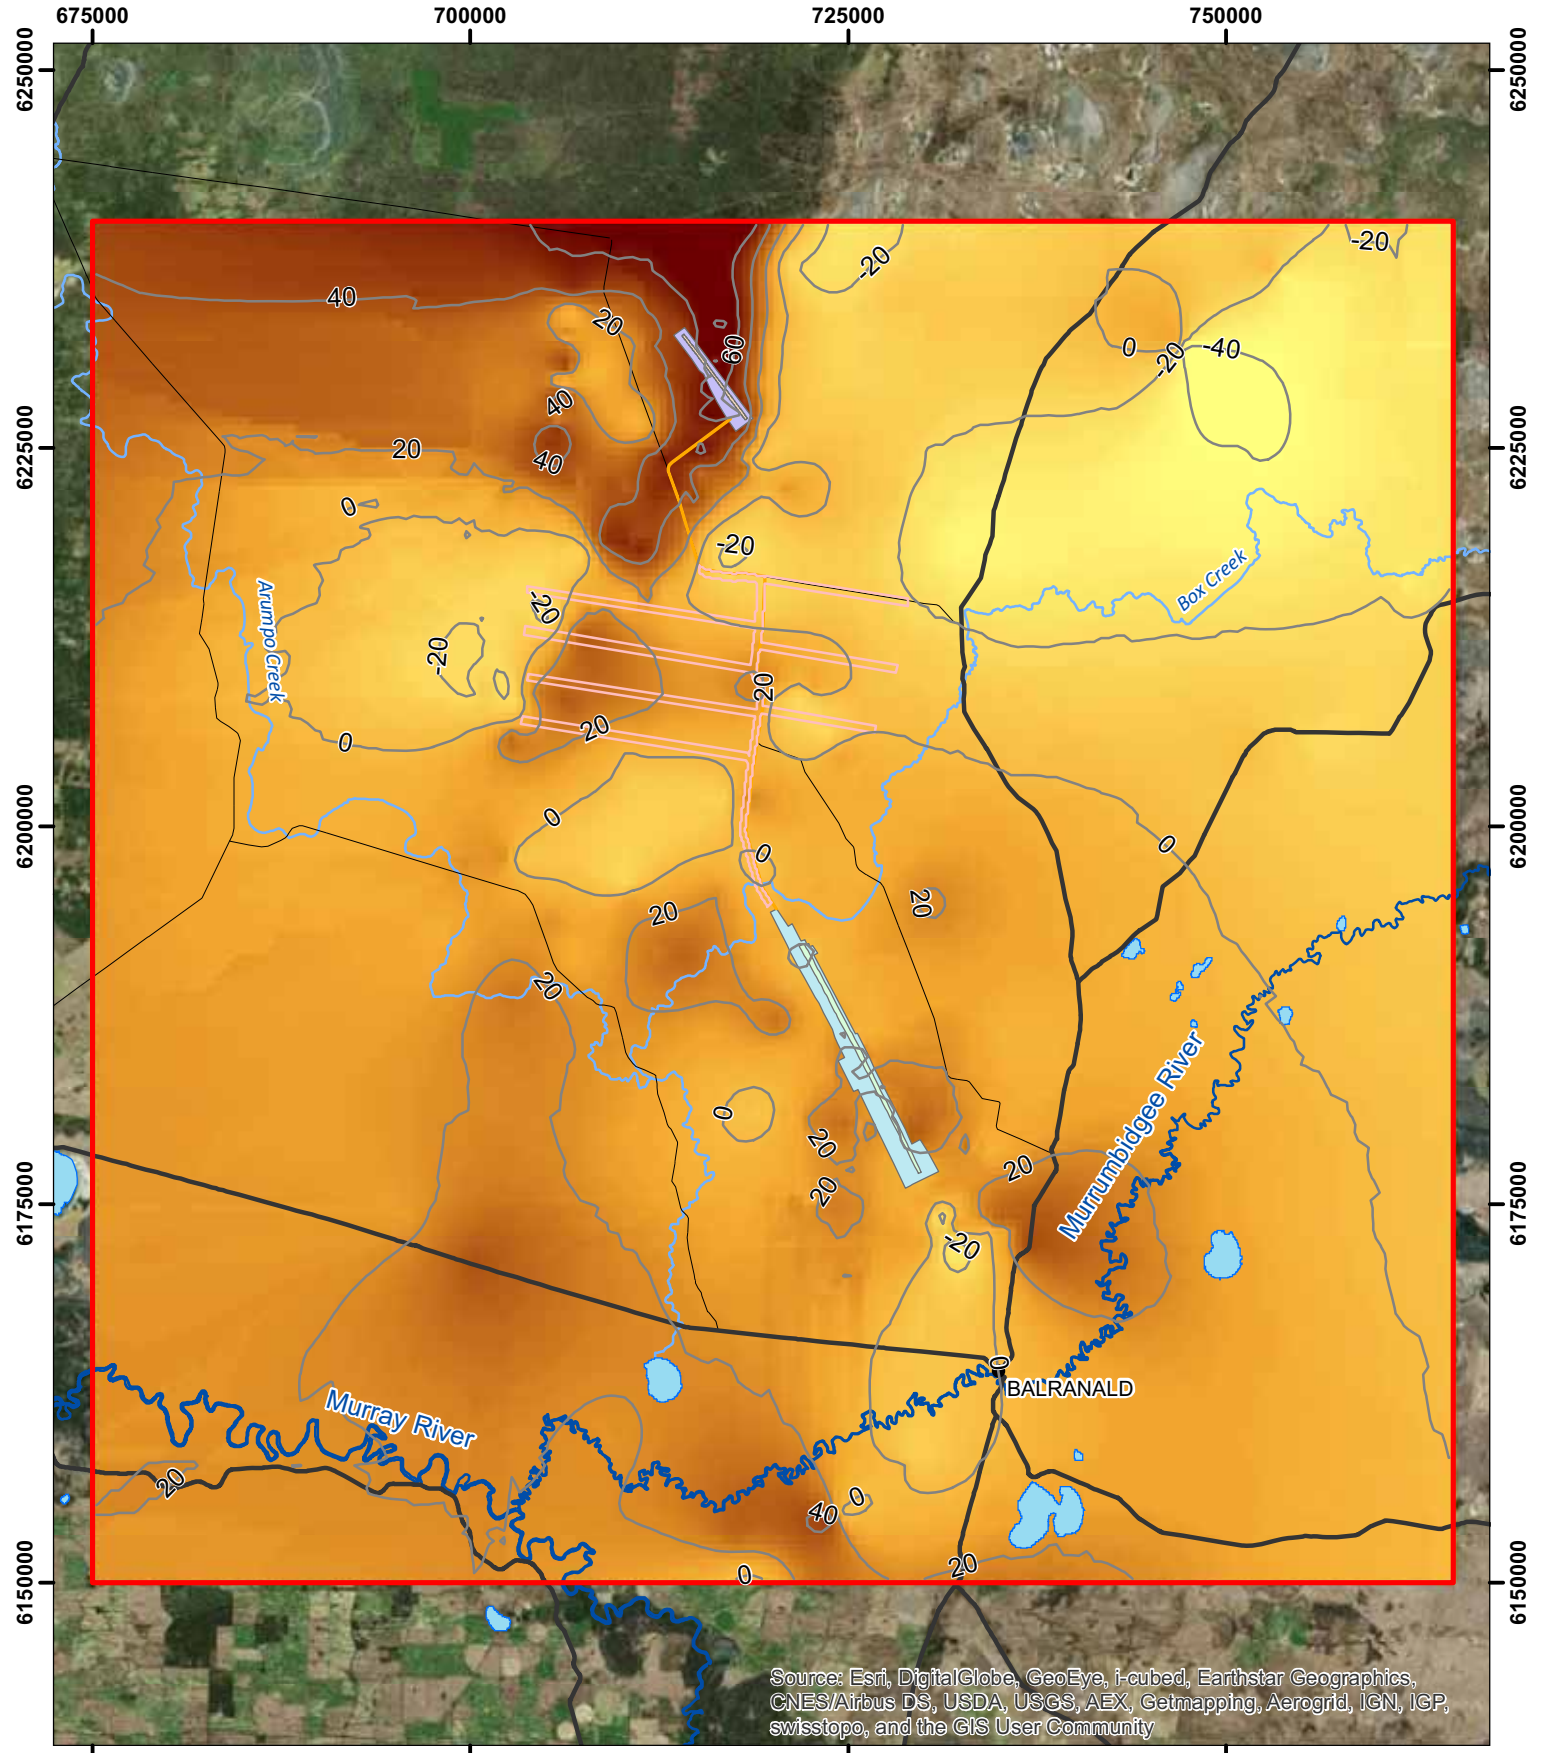

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contours (mAHD)
- Elevation (mAHD)**
High : 84
Low : -47



GDA 1994 MGA Zone 54



BAL2.0 top of LPS1 SZ (layer 4)



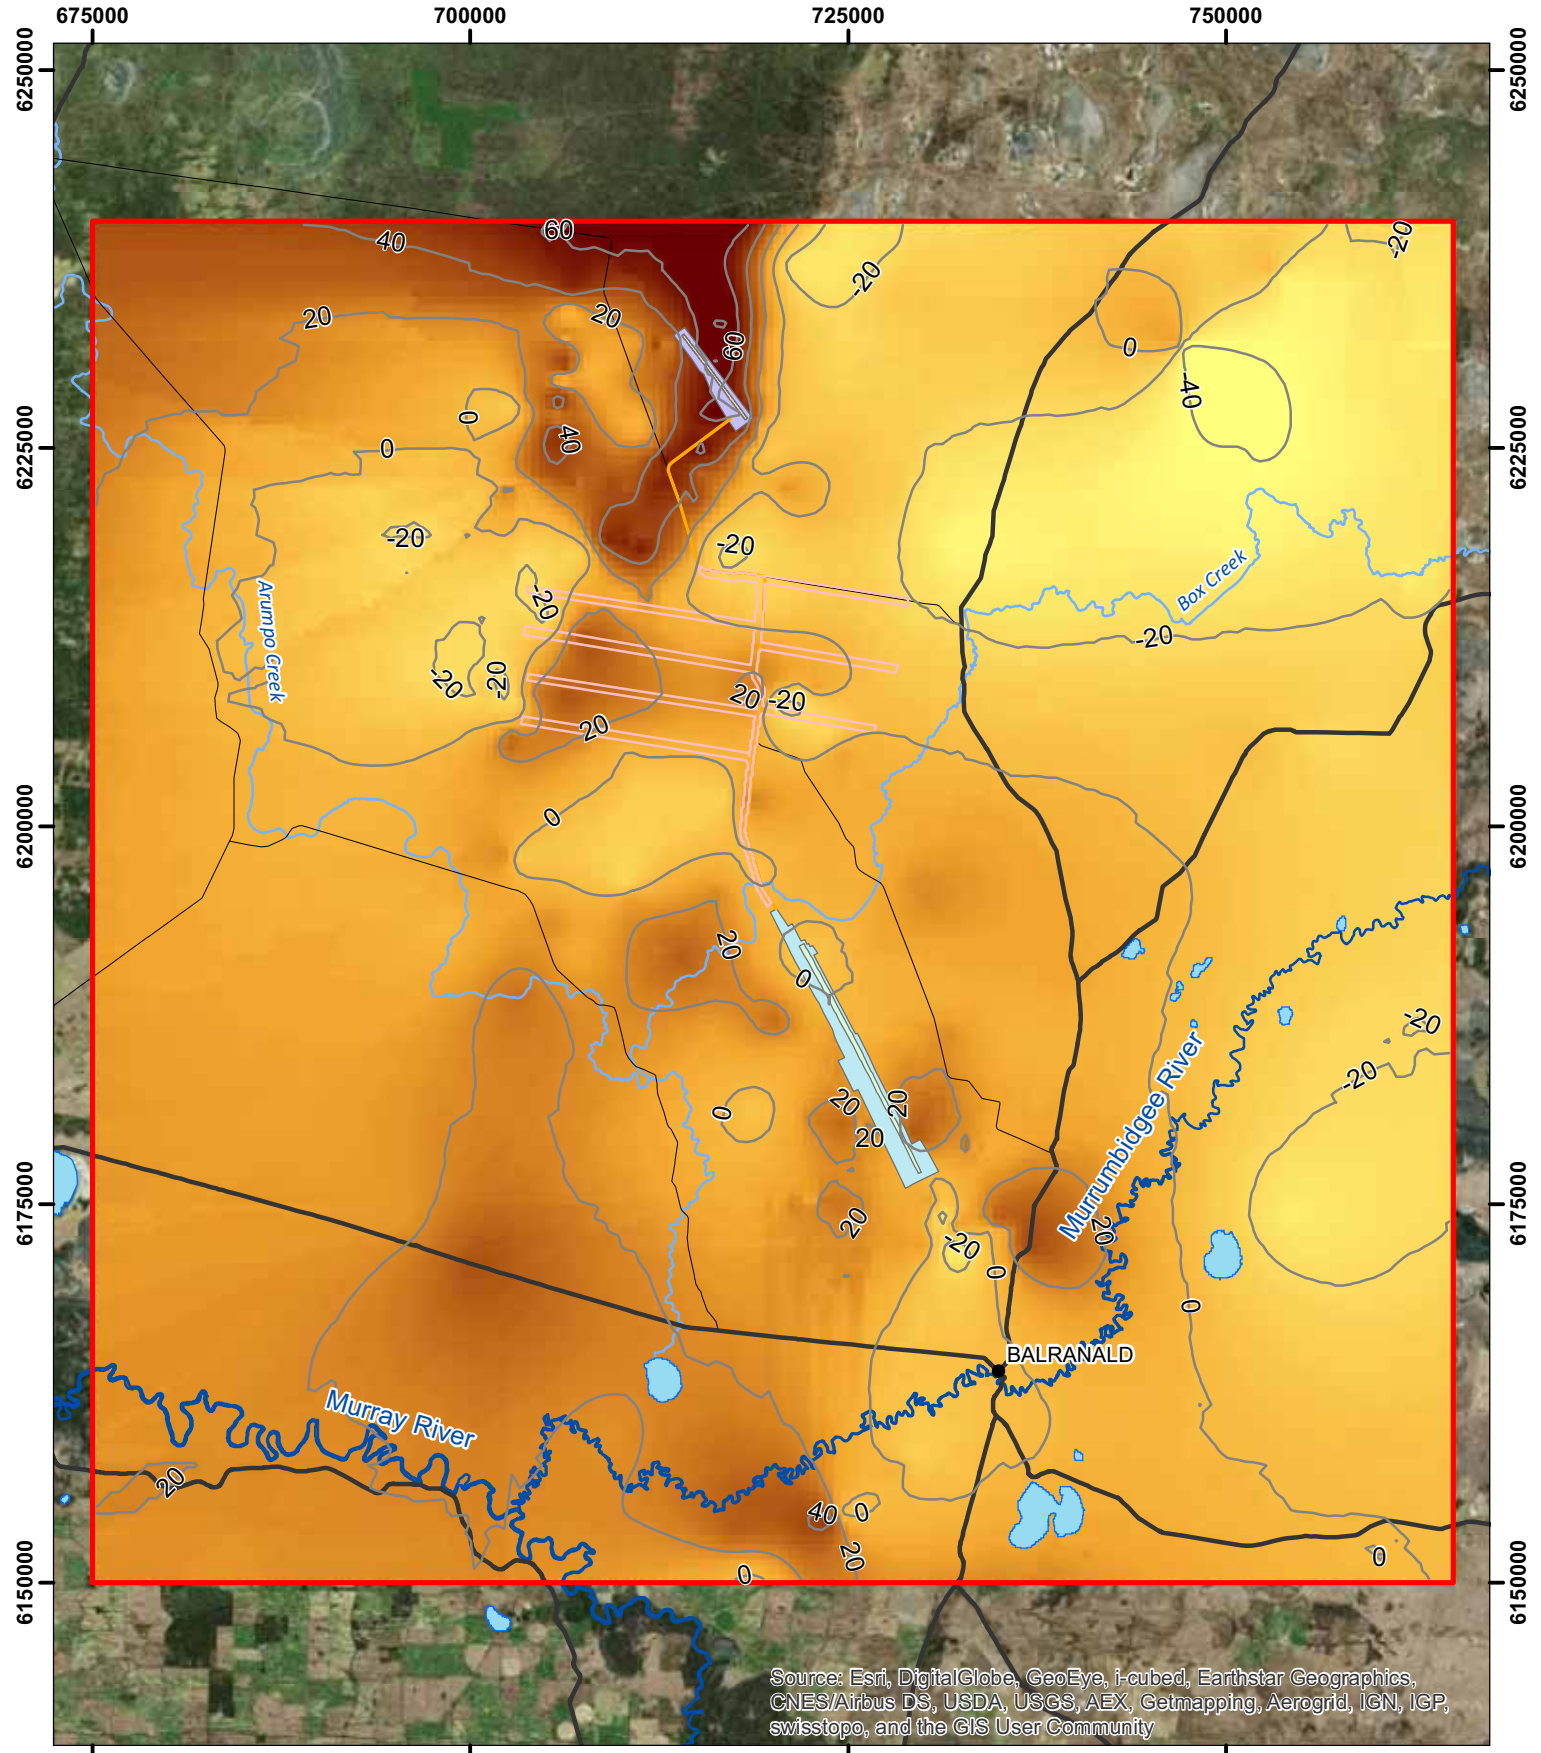


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contours (mAHD)





BAL2.0 top of LPS1 LS (layer 5)



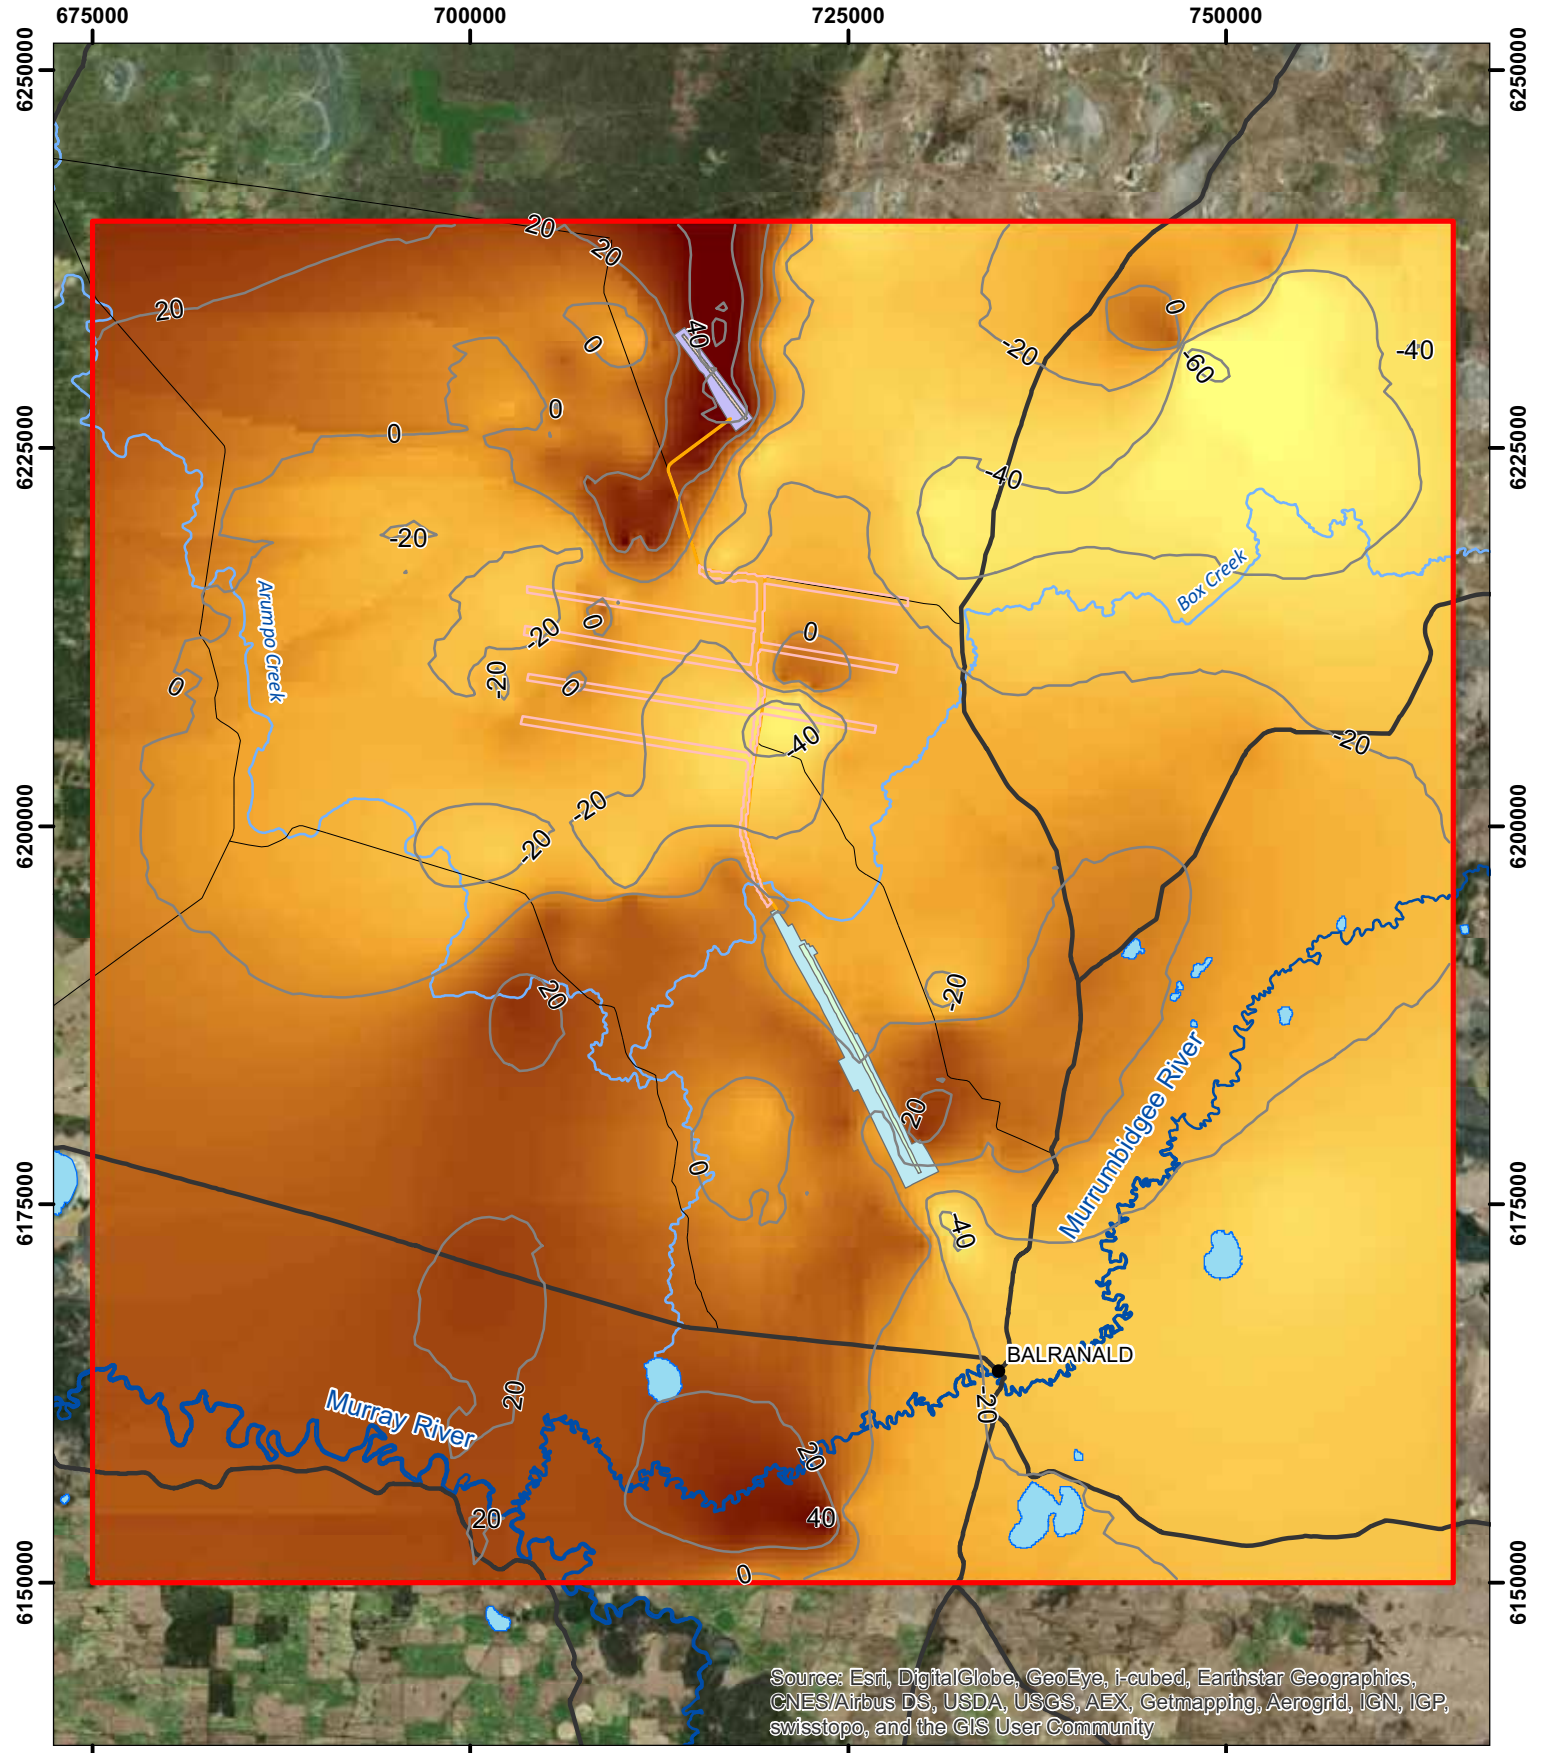


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contours (mAHD)





BAL2.0 top of LPS2 SZ (layer 6)



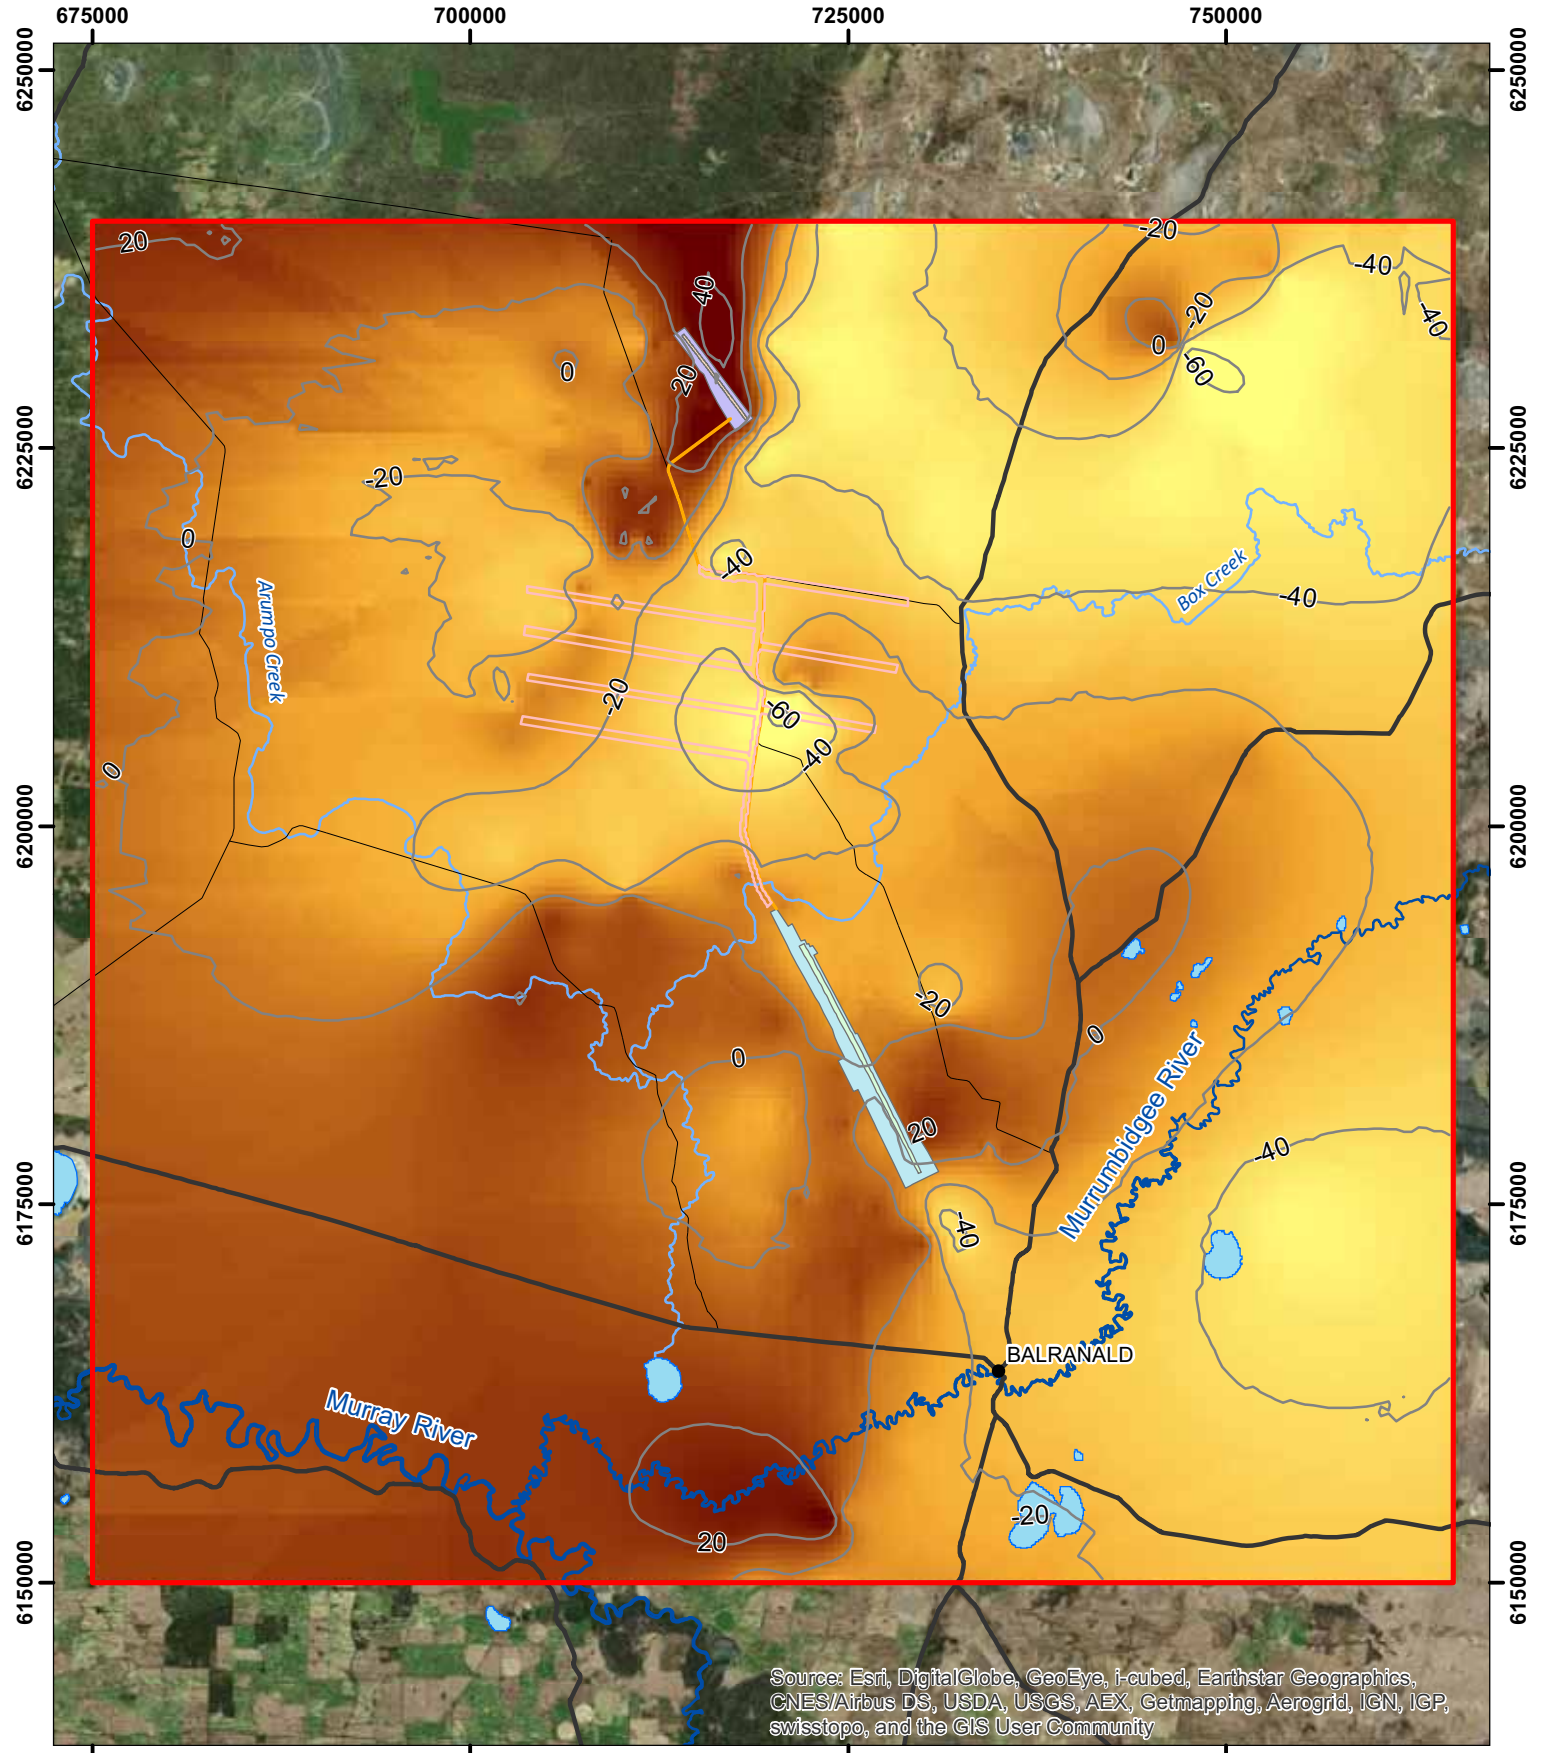


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contours (mAHD)




BAL2.0 top of LPS2 LS (layer 7)



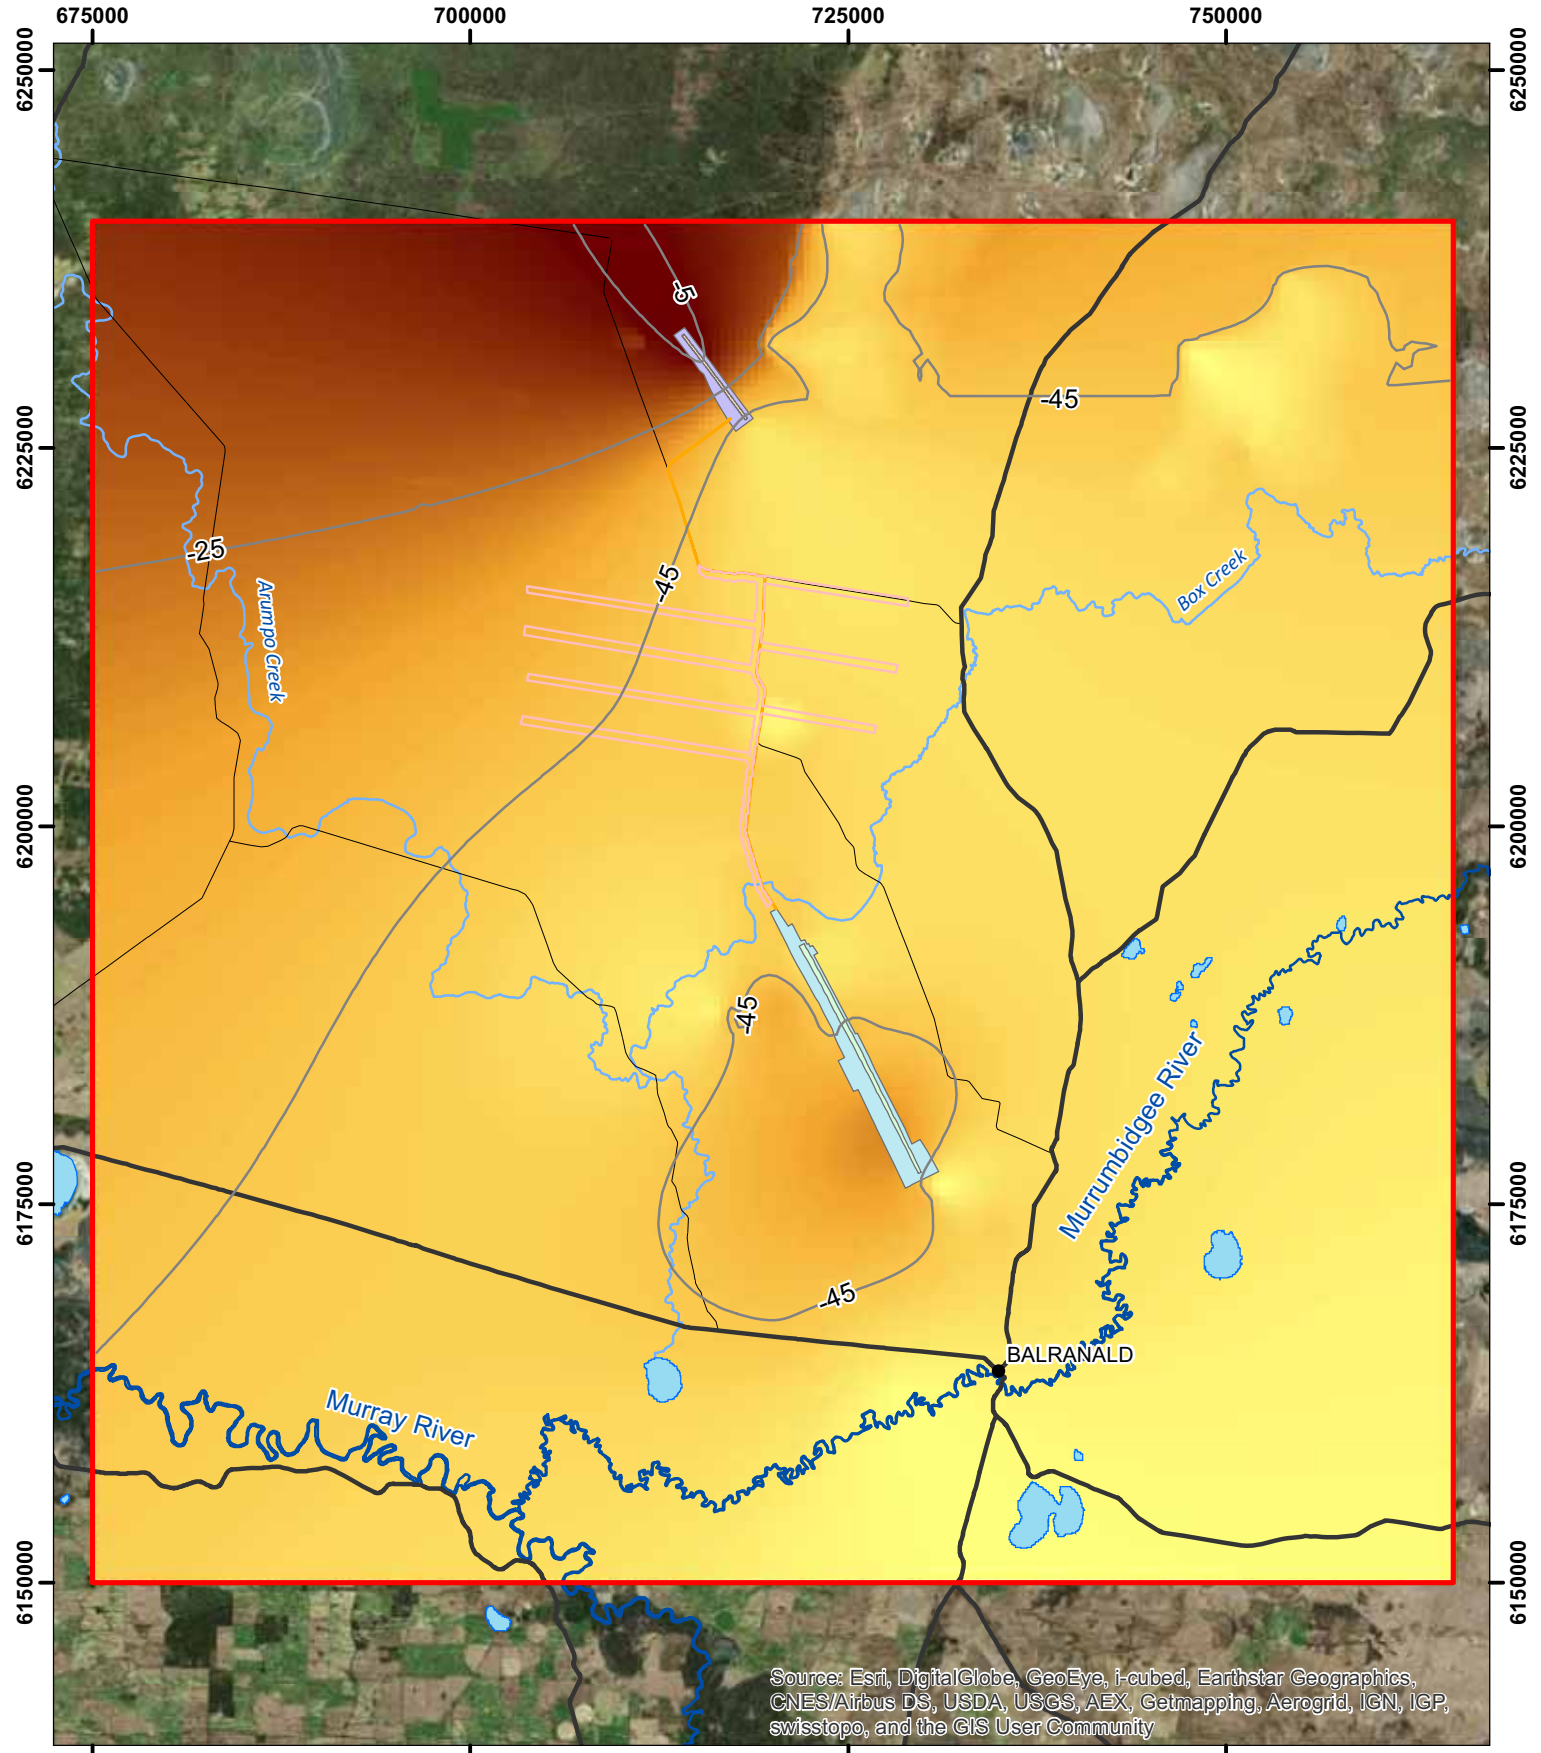

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contours (mAHD)




GDA 1994 MGA Zone 54





BAL2.0 top of Geera Clay (layer 8)



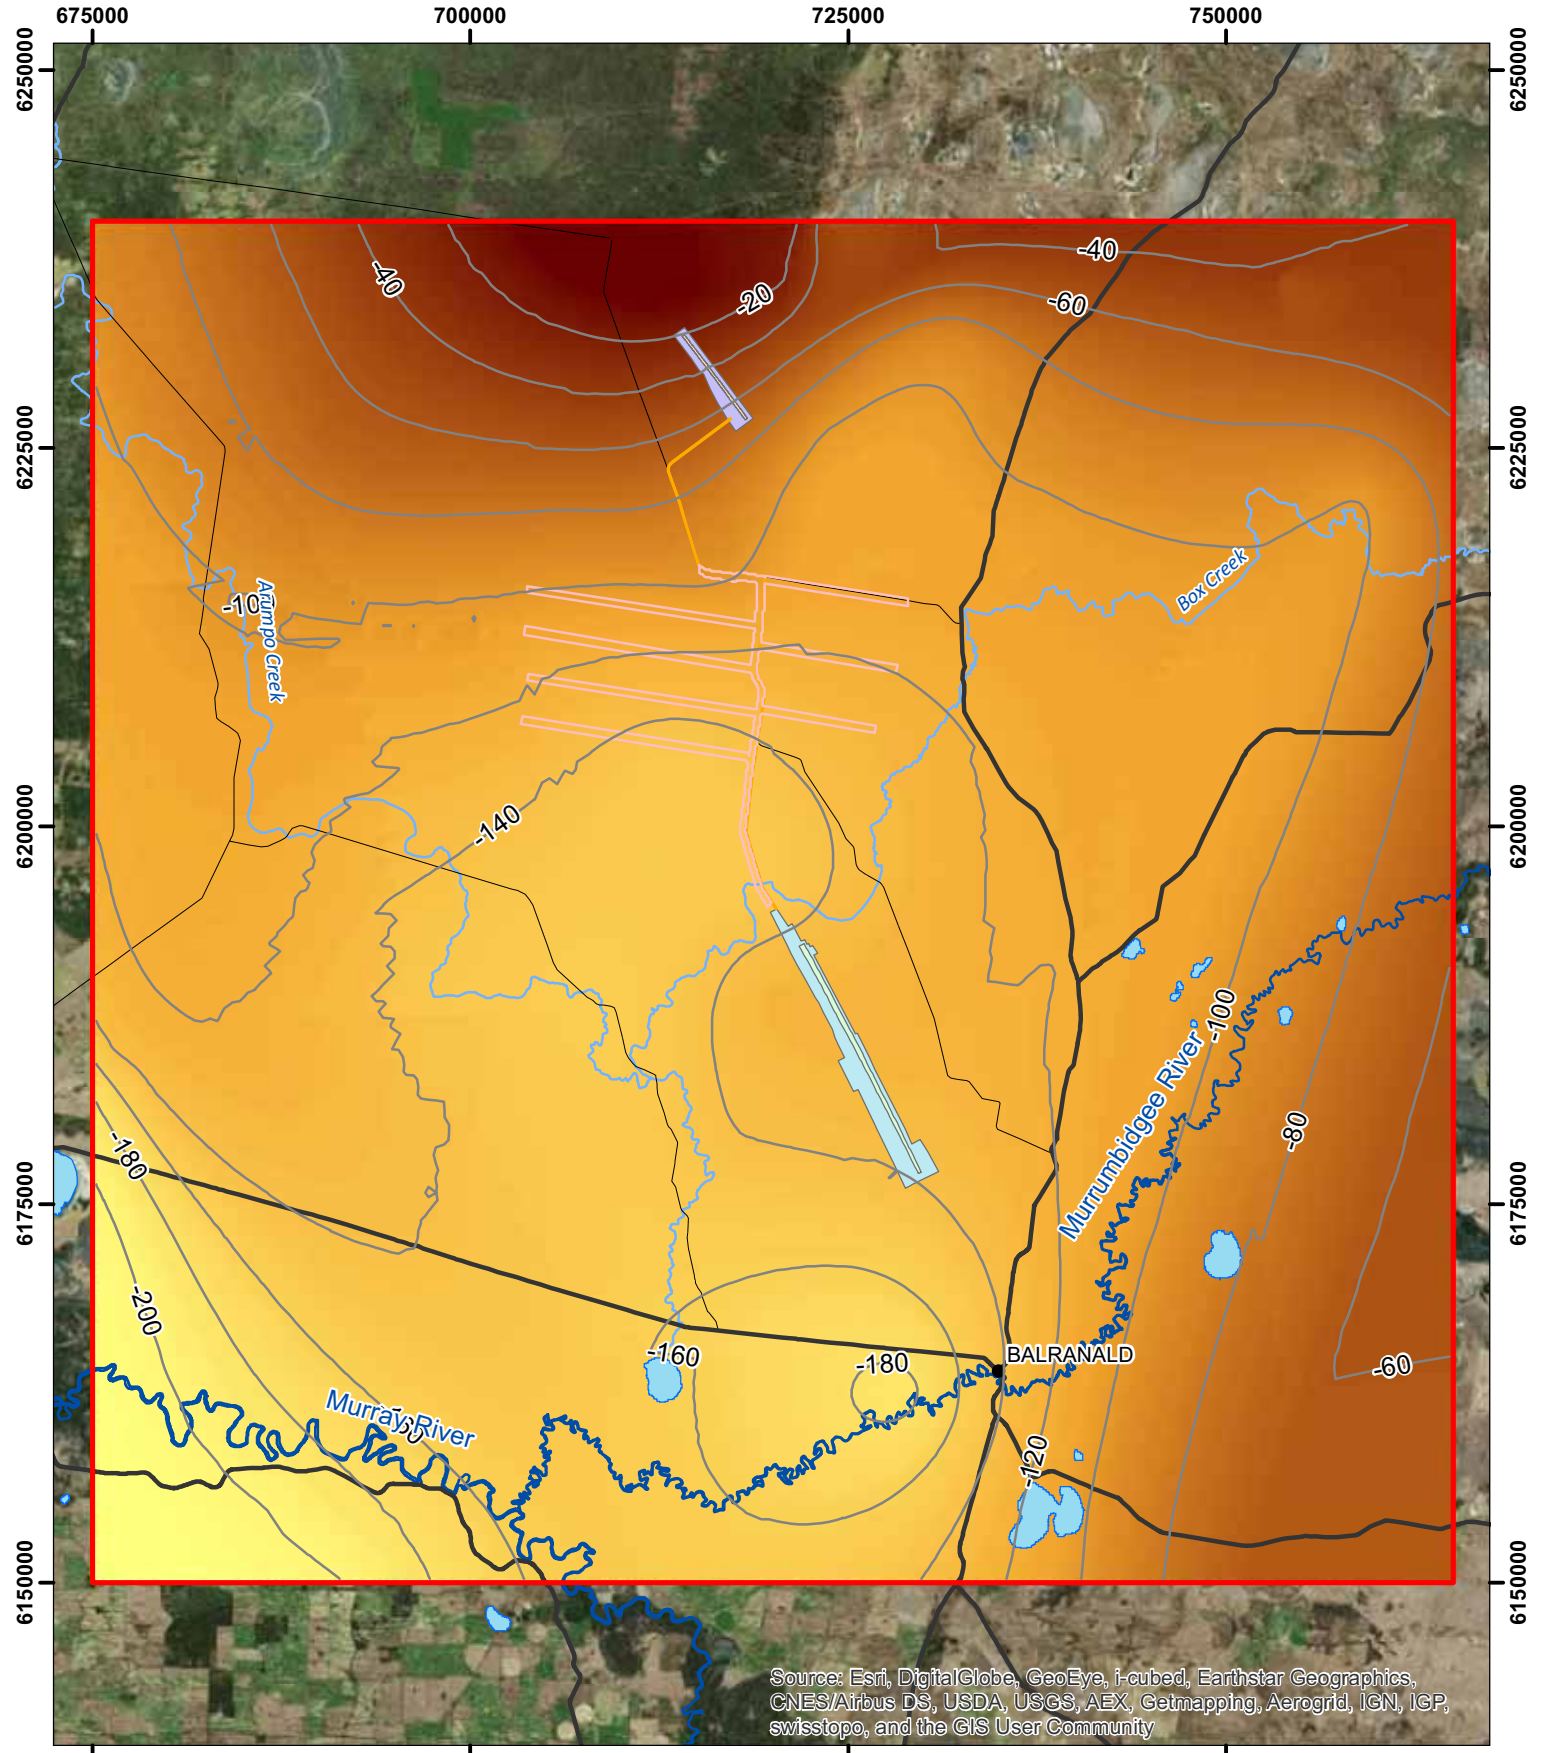


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation contours (mAHD)





BAL2.0 top of Olney Formation (layer 9)



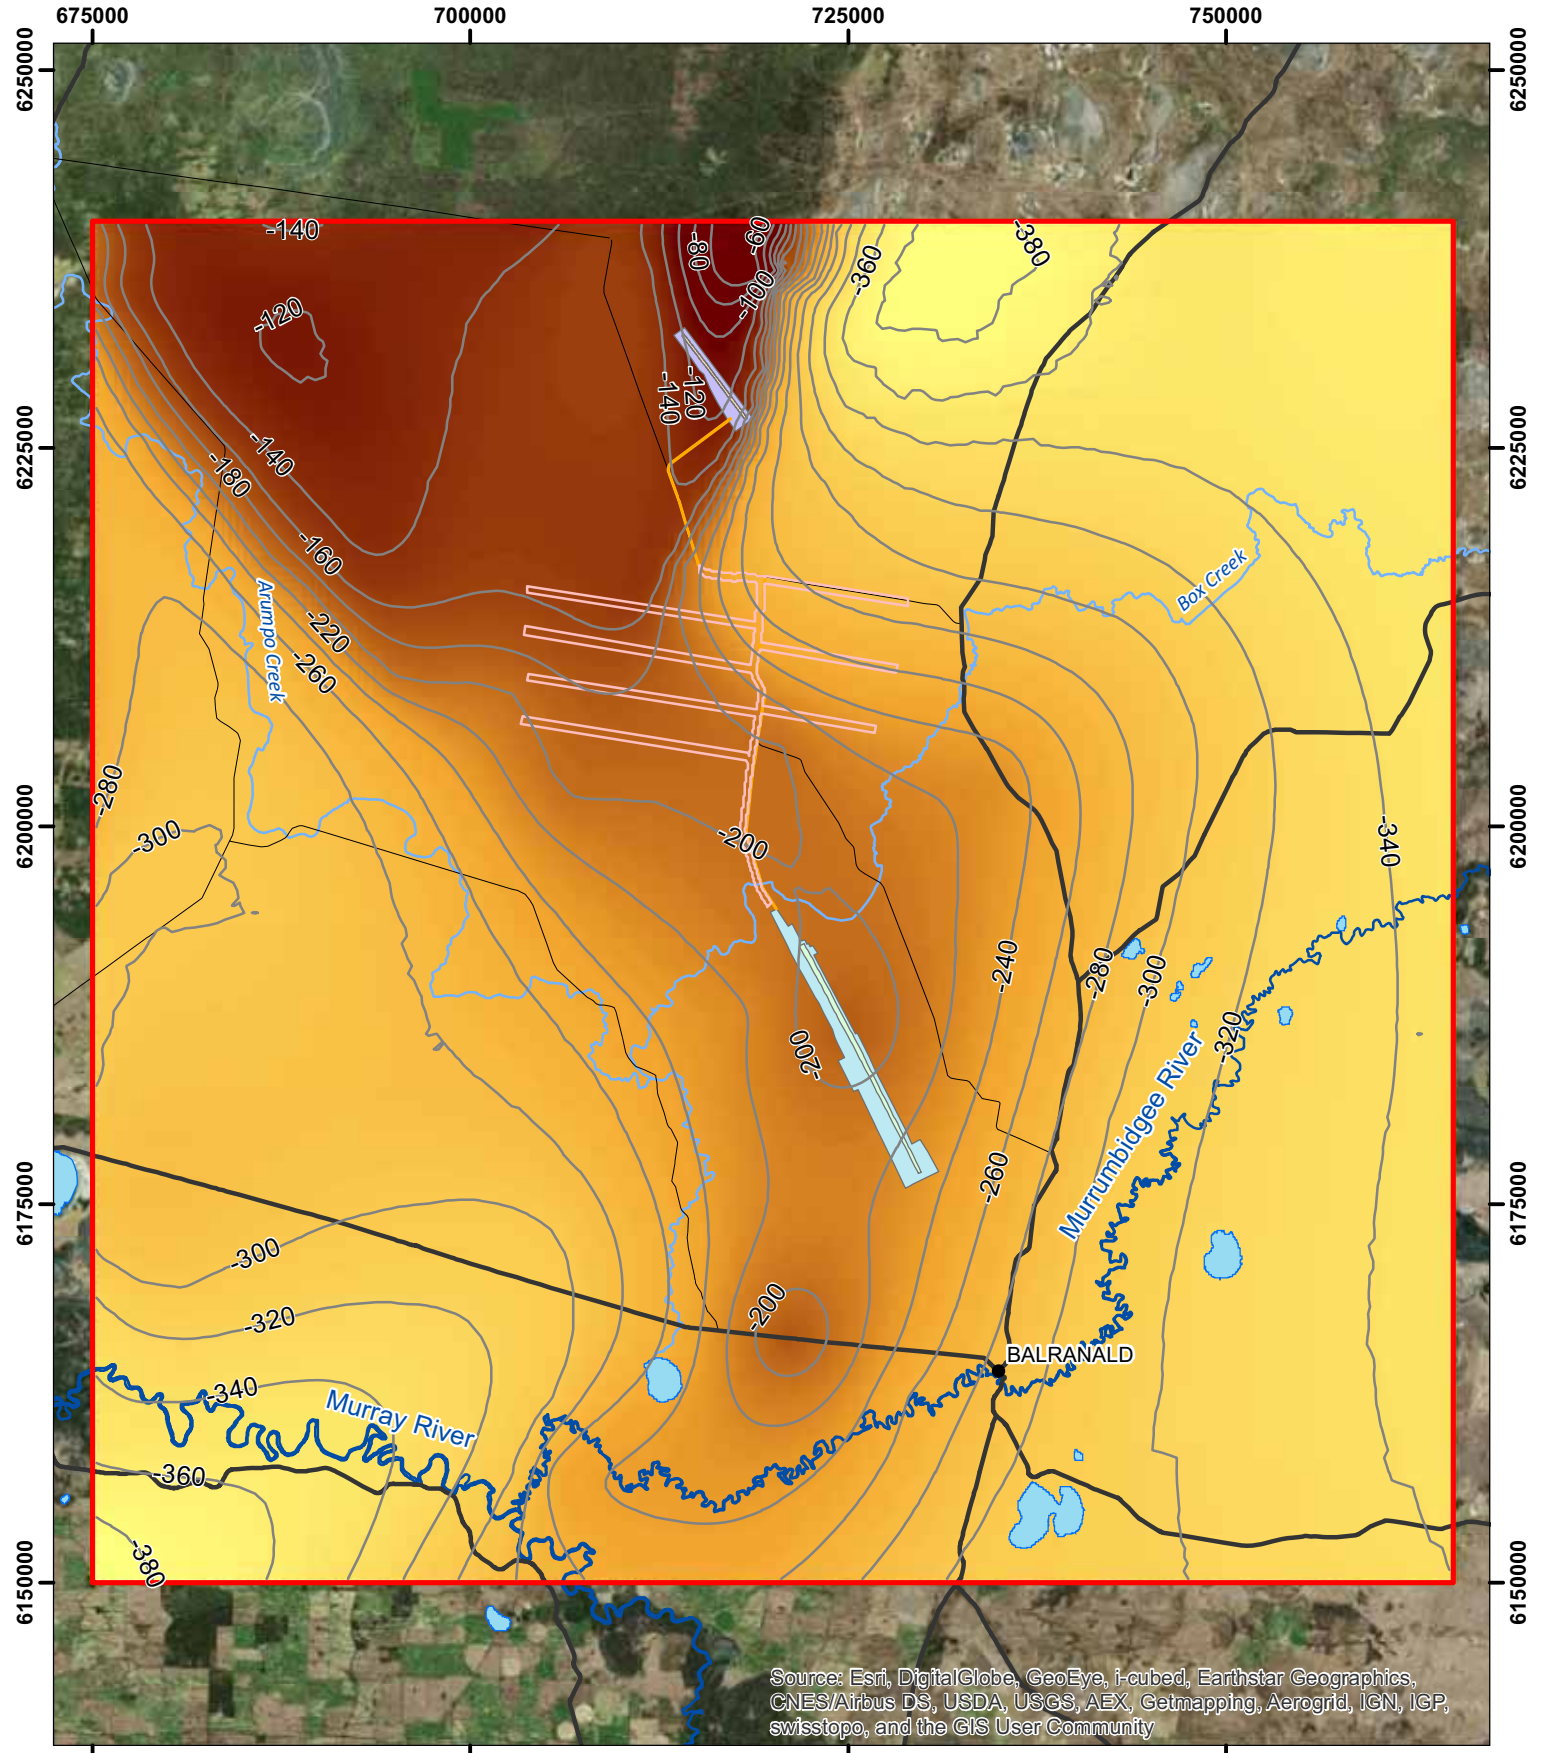


- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Elevation Contours (mAHD)

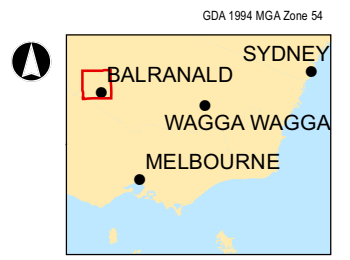

BAL2.0 top of basement (bottom of layer 9)




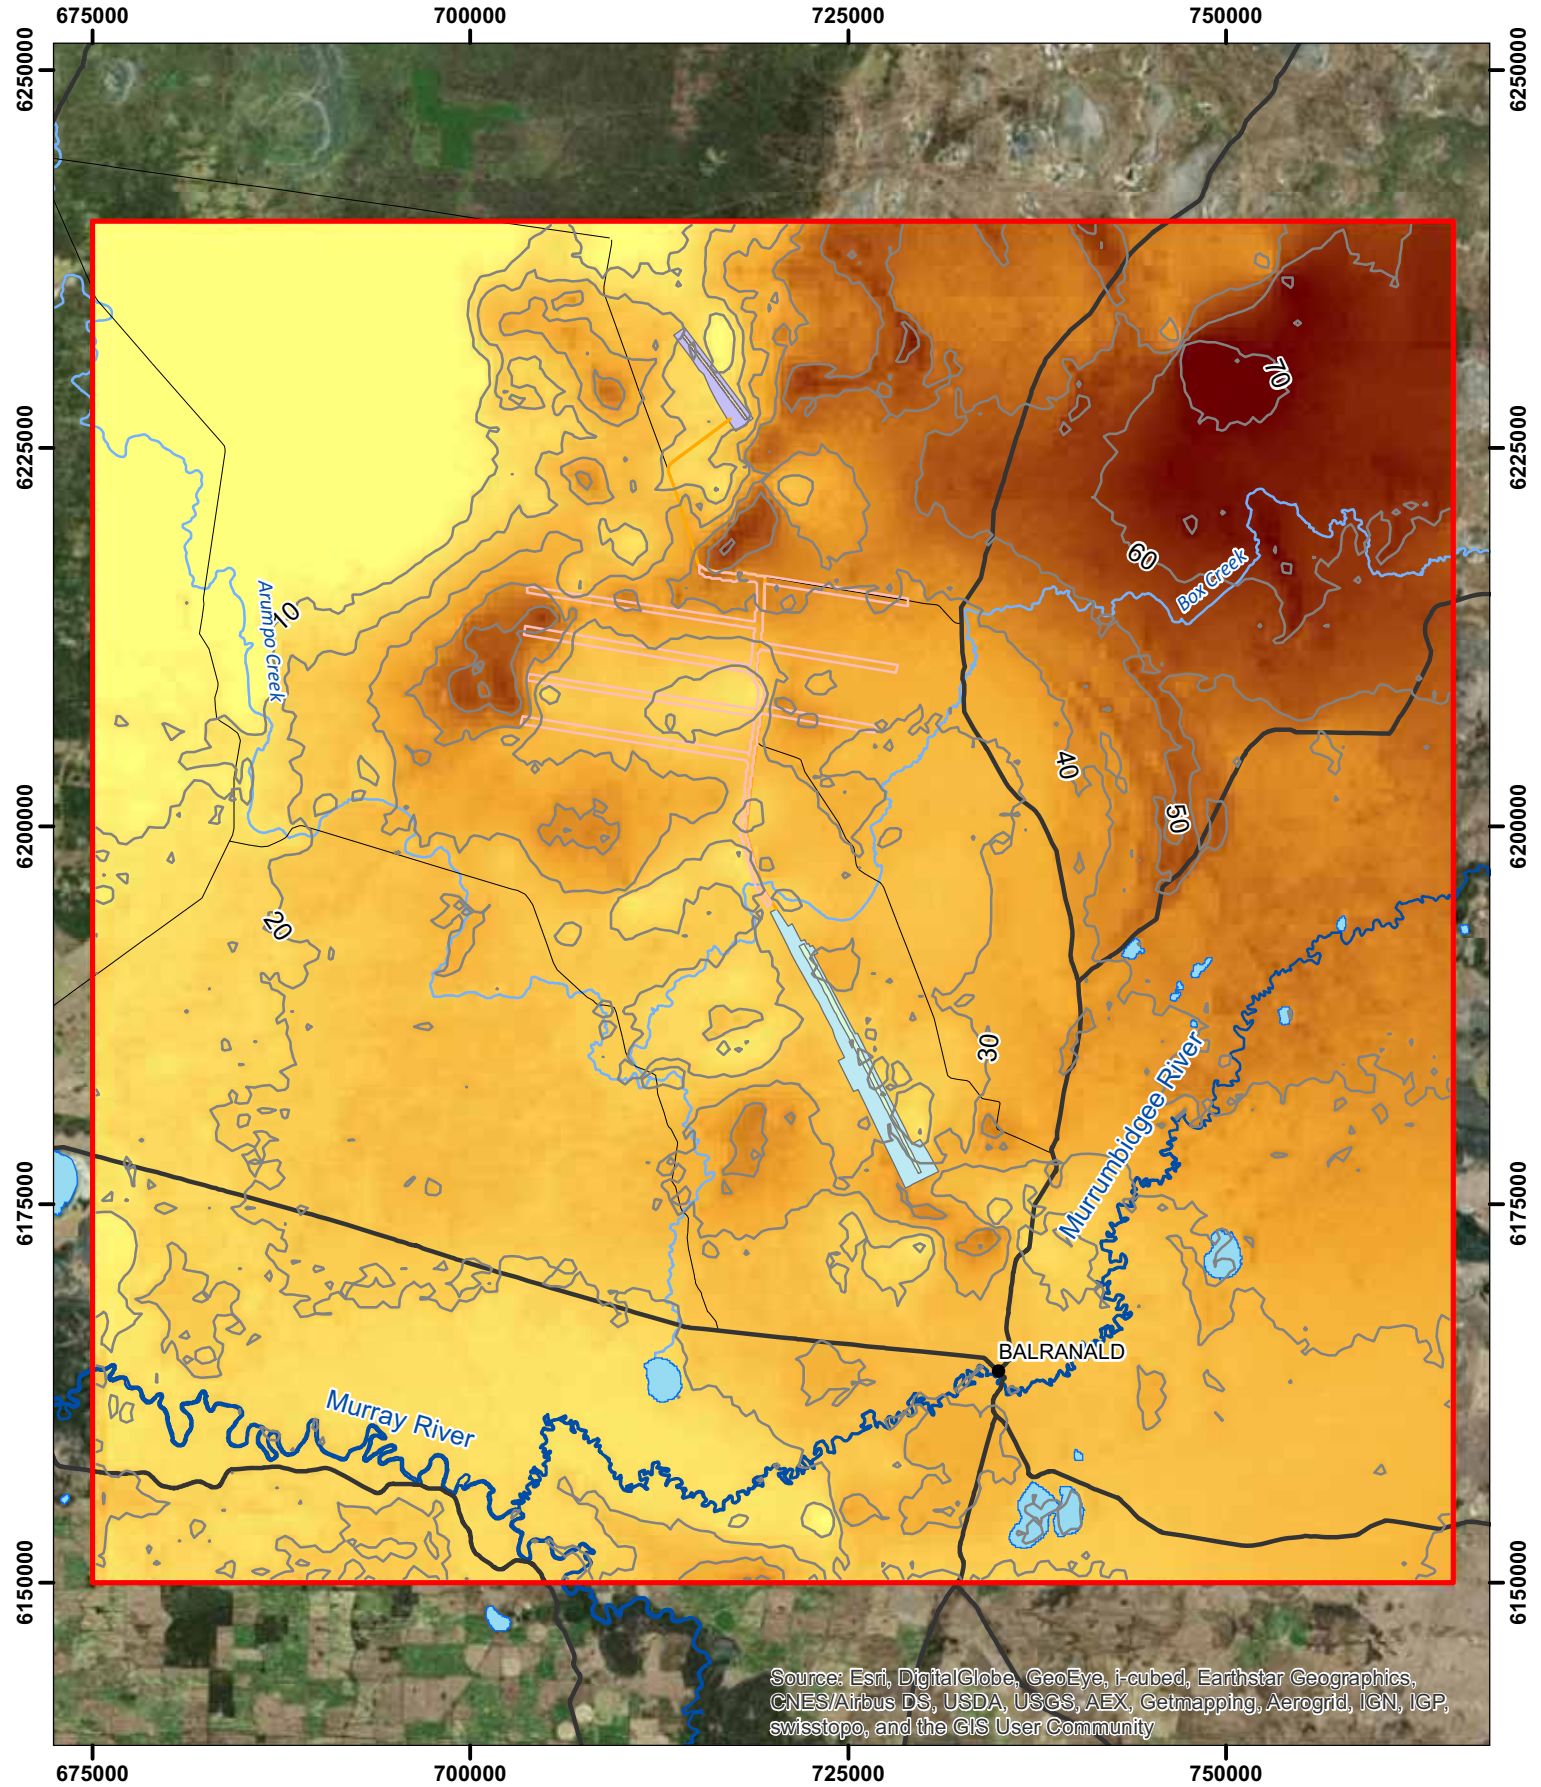

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Thickness contours (m)




BAL2.0 thickness of Shepparton Formation (shallow) (layer 1)



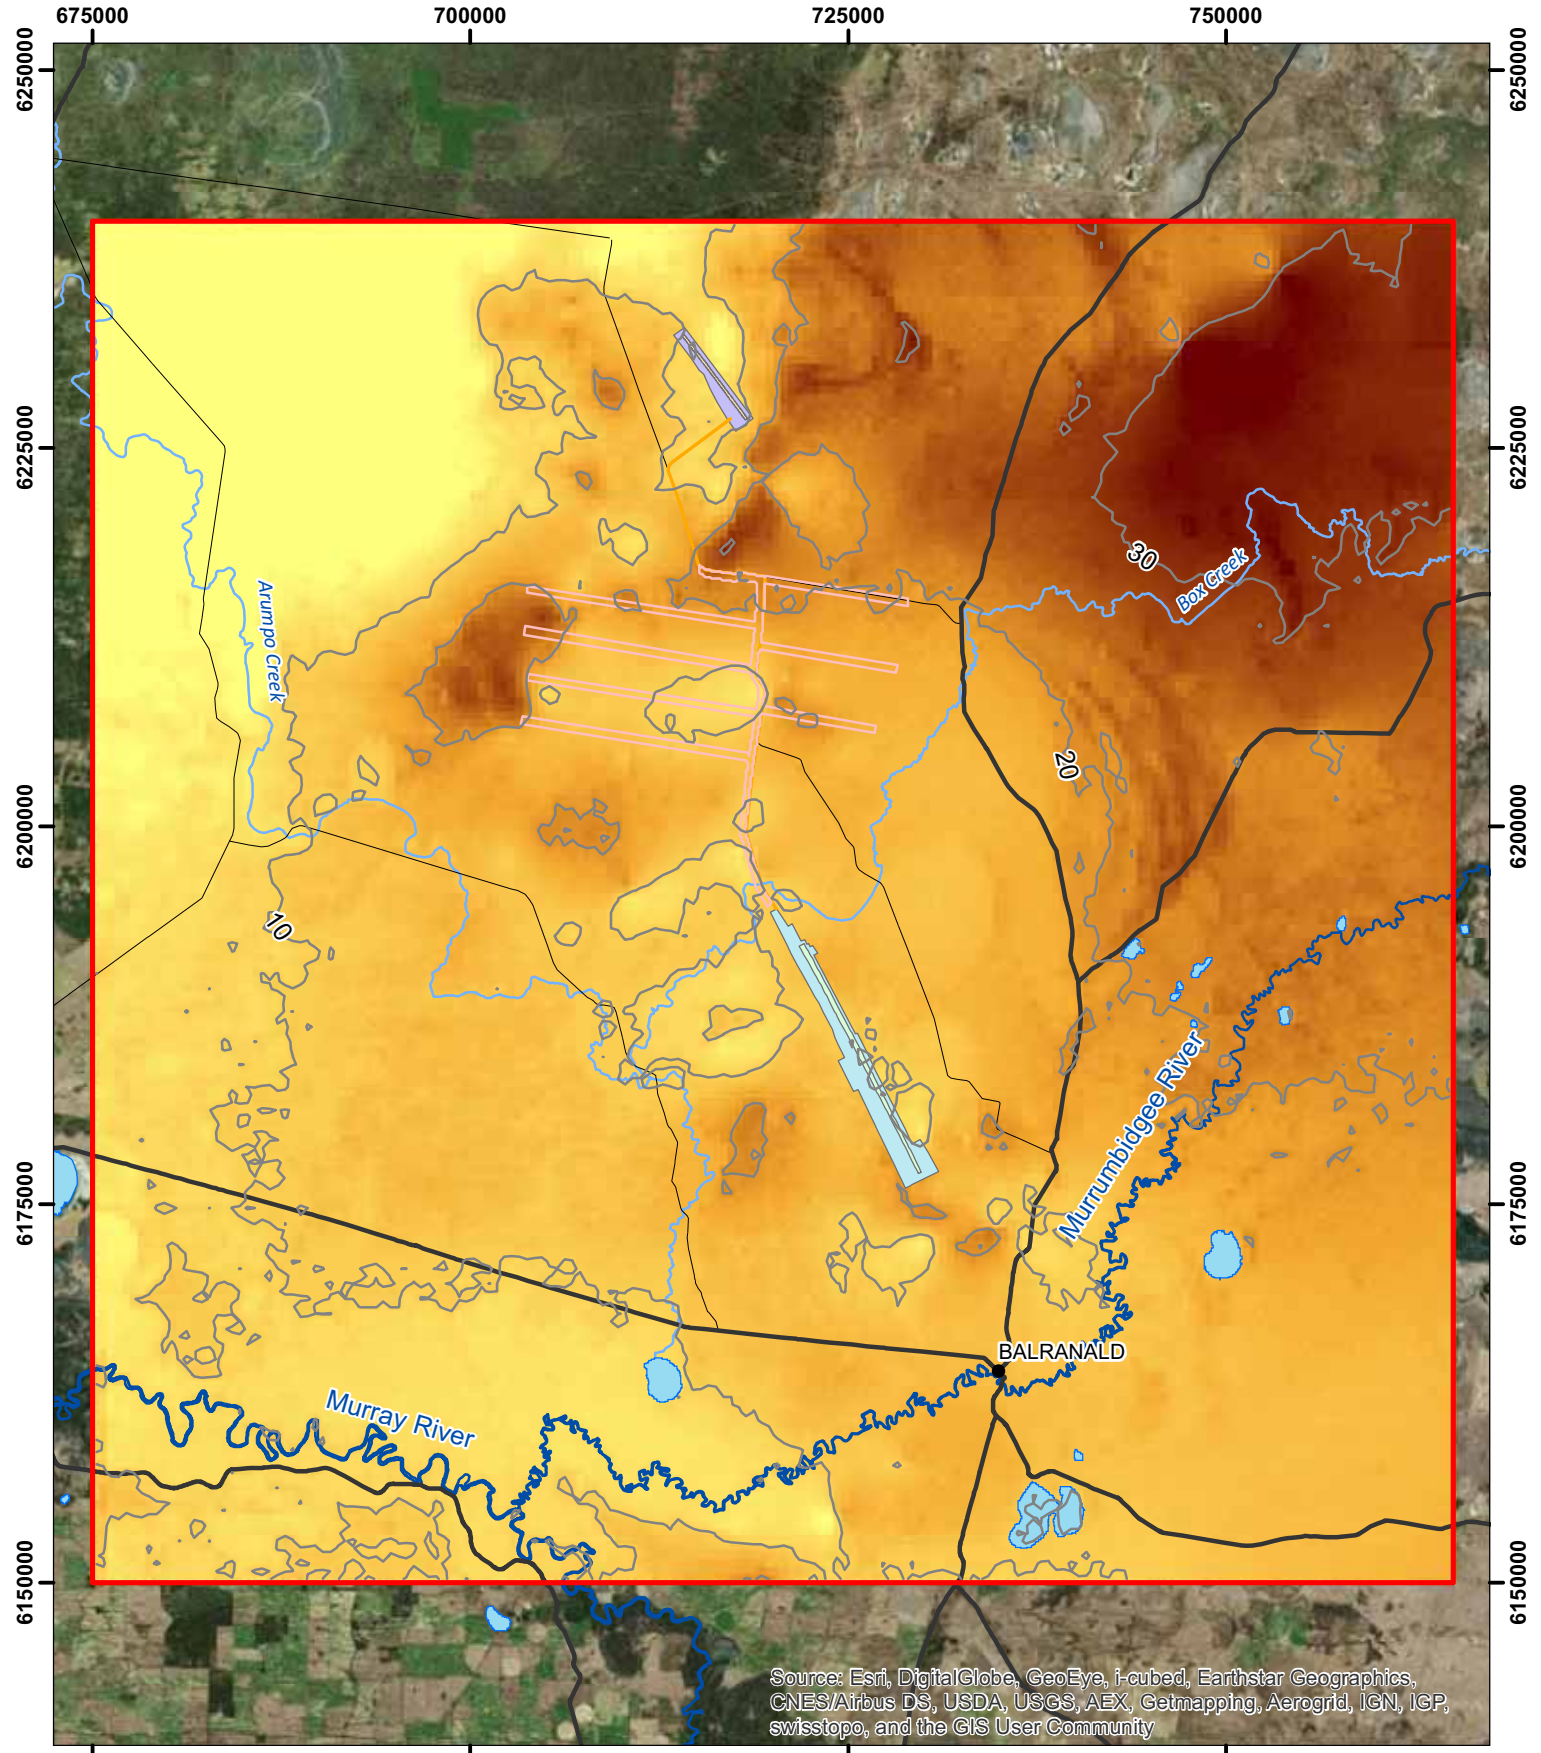

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Thickness contours (m)




GDA 1994 MGA Zone 54





BAL2.0 thickness of Shepparton Formation (deep) (layer 2)



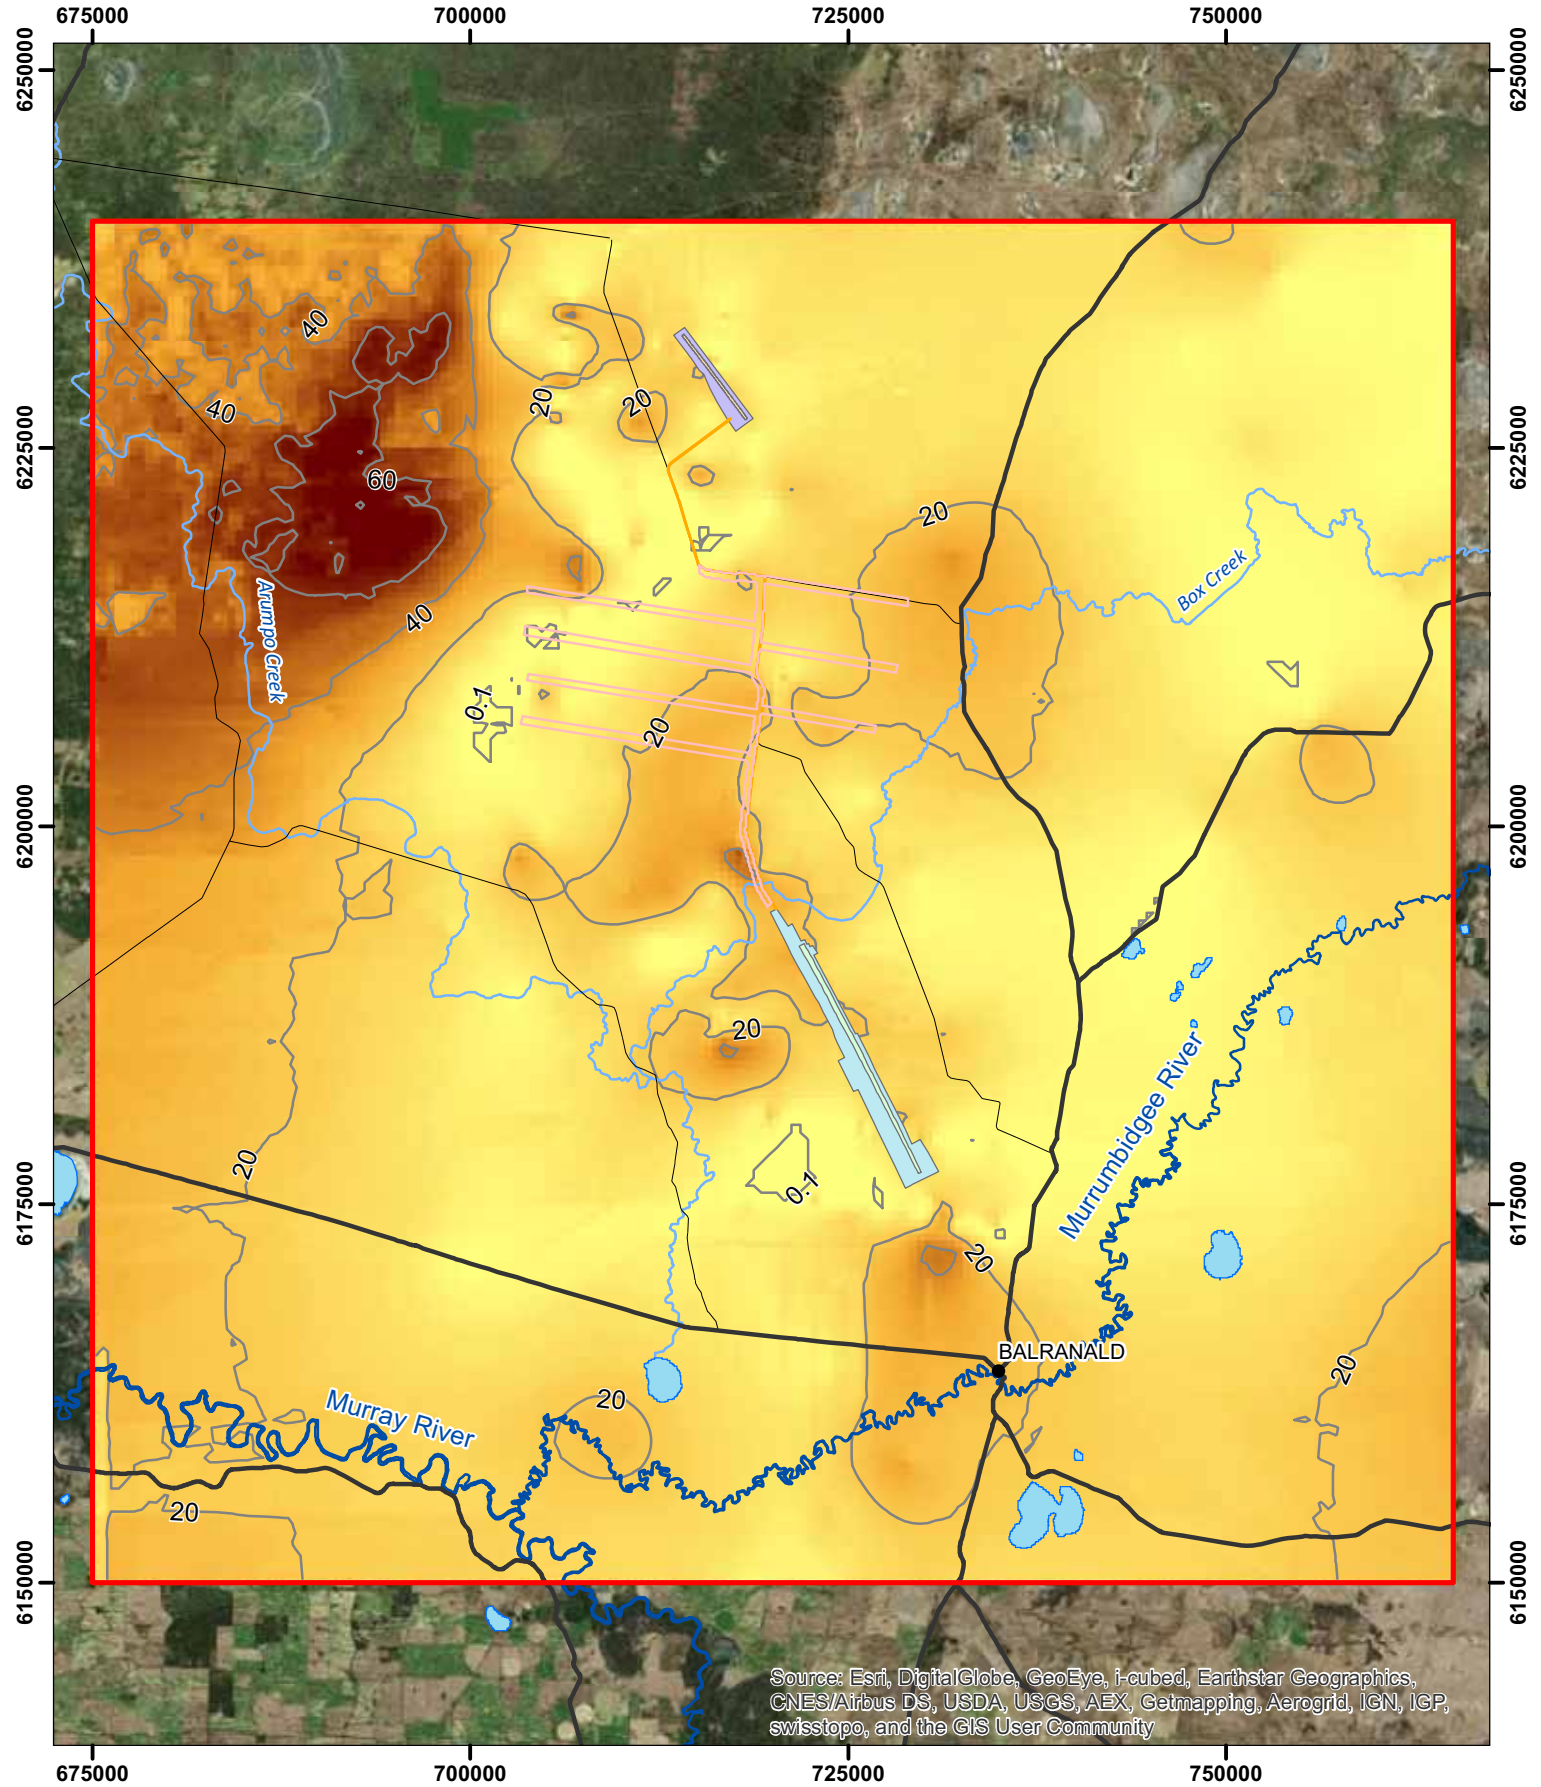


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Thickness contours (m)

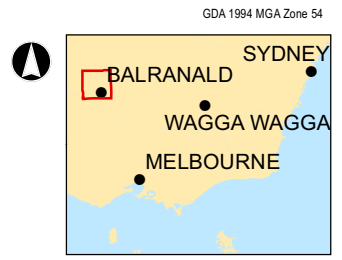



BAL2.0 thickness of LPS1 FS (layer 3)



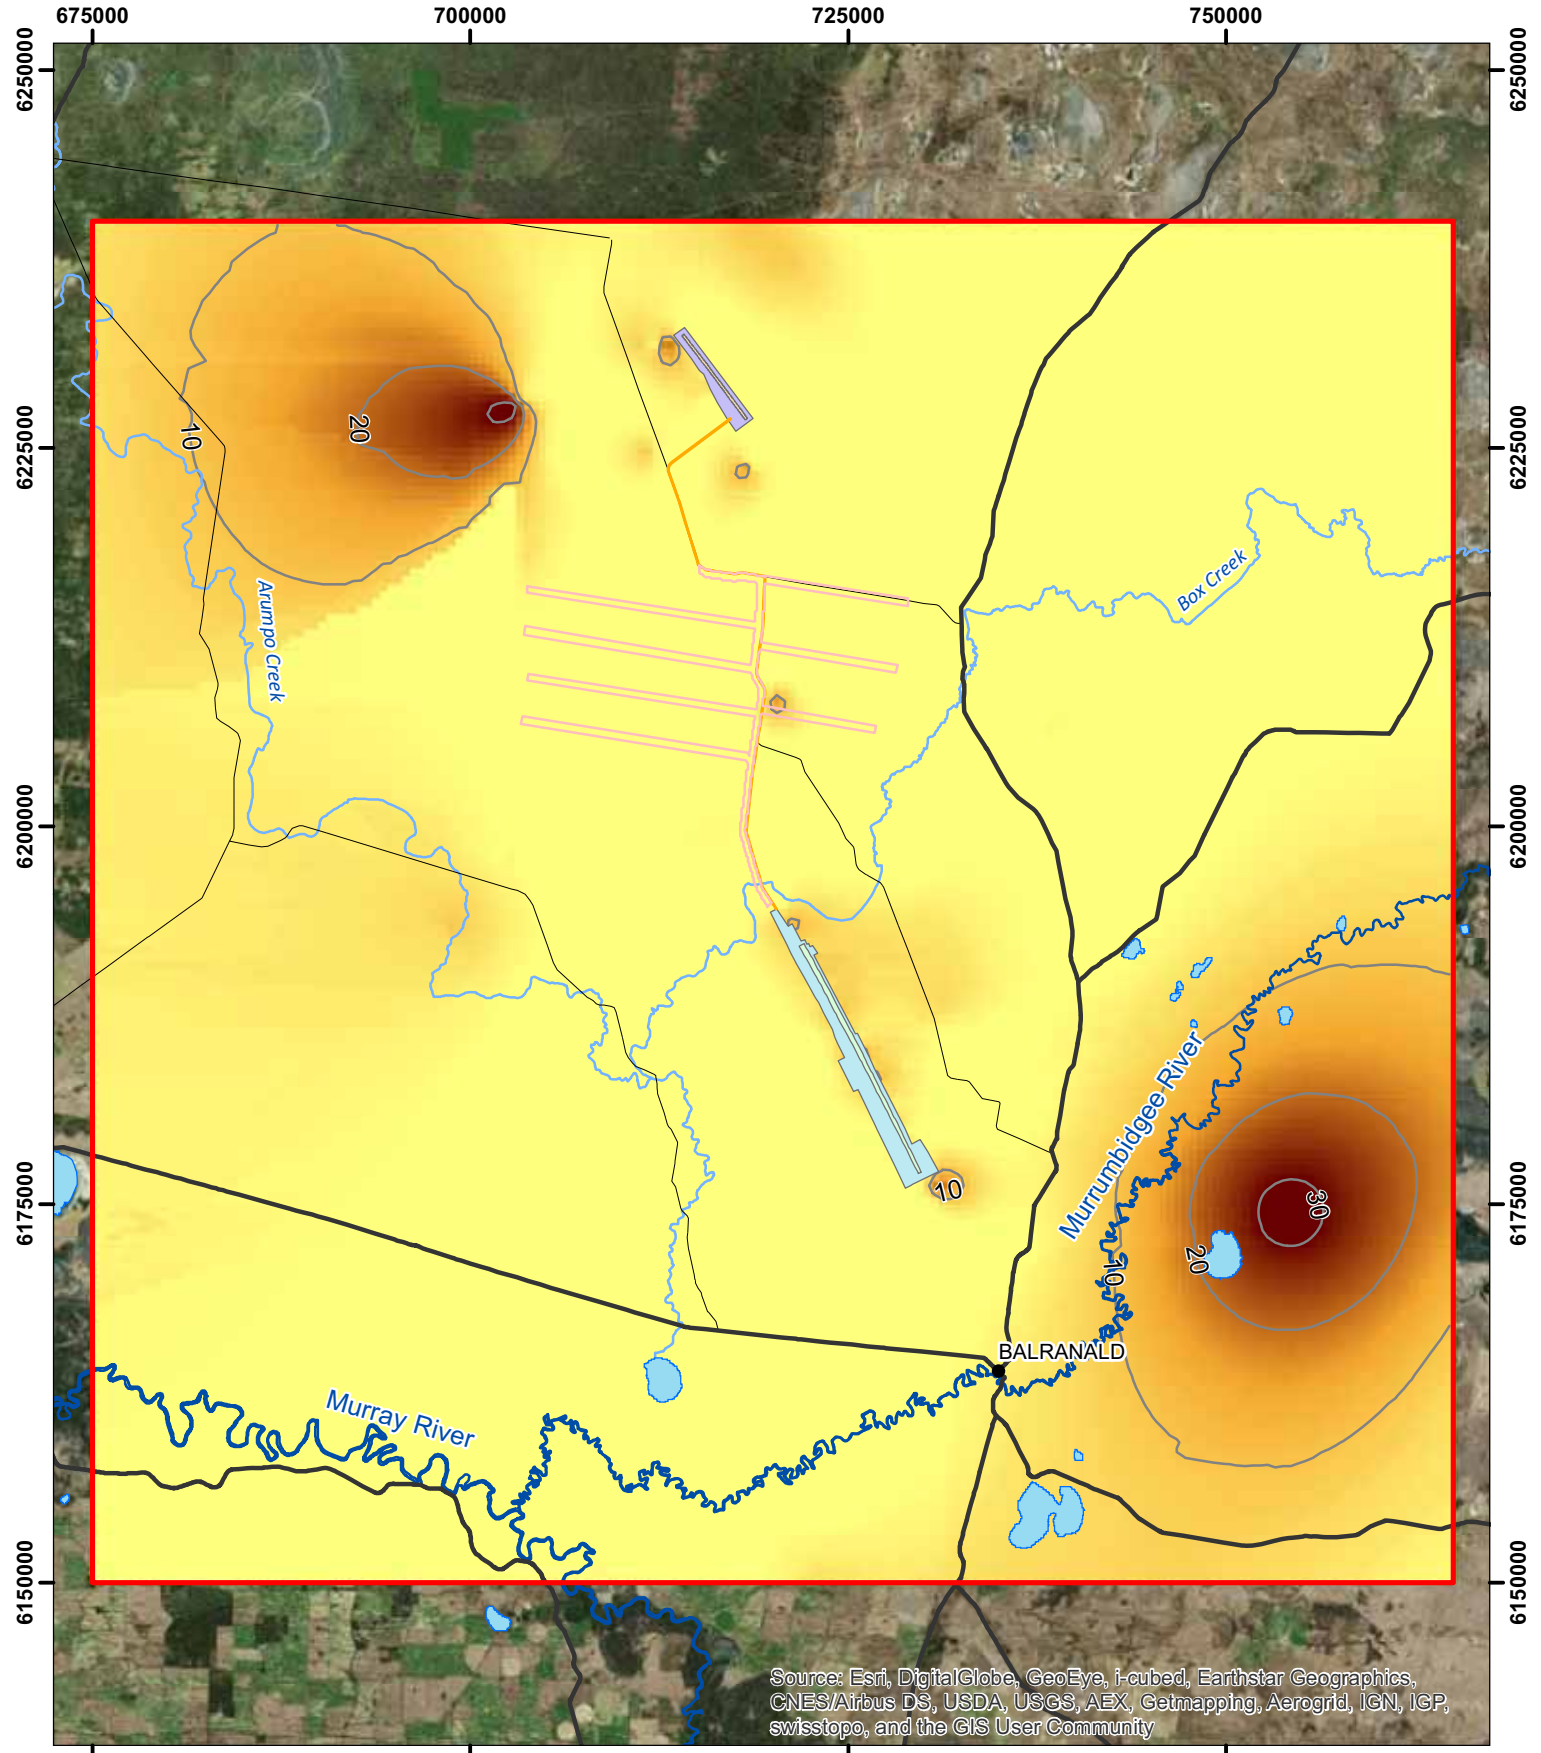


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Thickness contours (m)





BAL2.0 thickness of LPS1 SZ (layer 4)



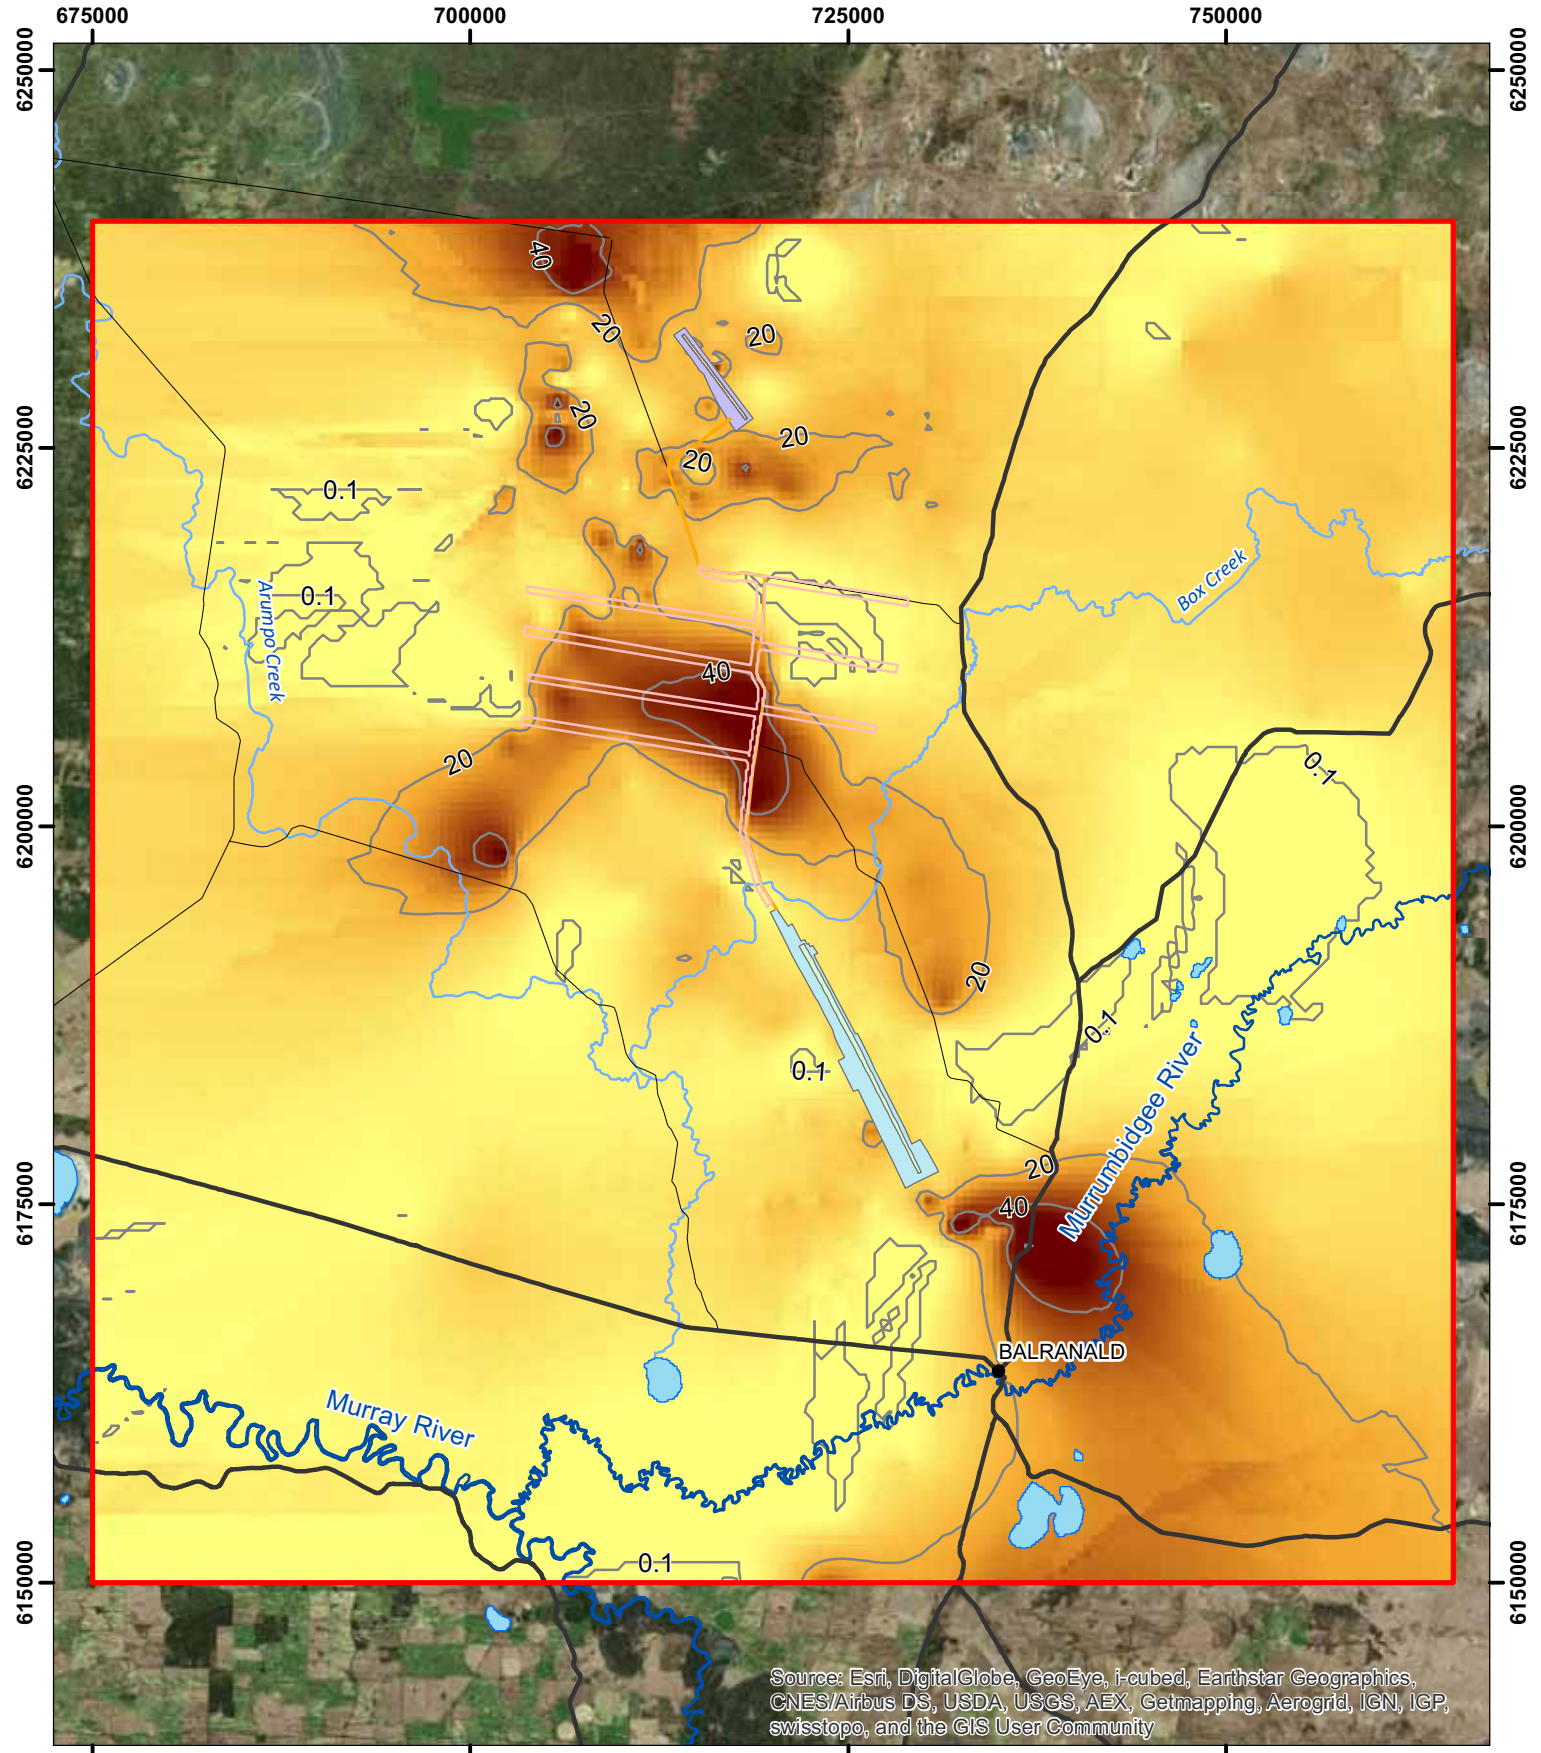


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Thickness contours (m)





BAL2.0 thickness of LPS1 LS-LPS2 FS (layer 5)



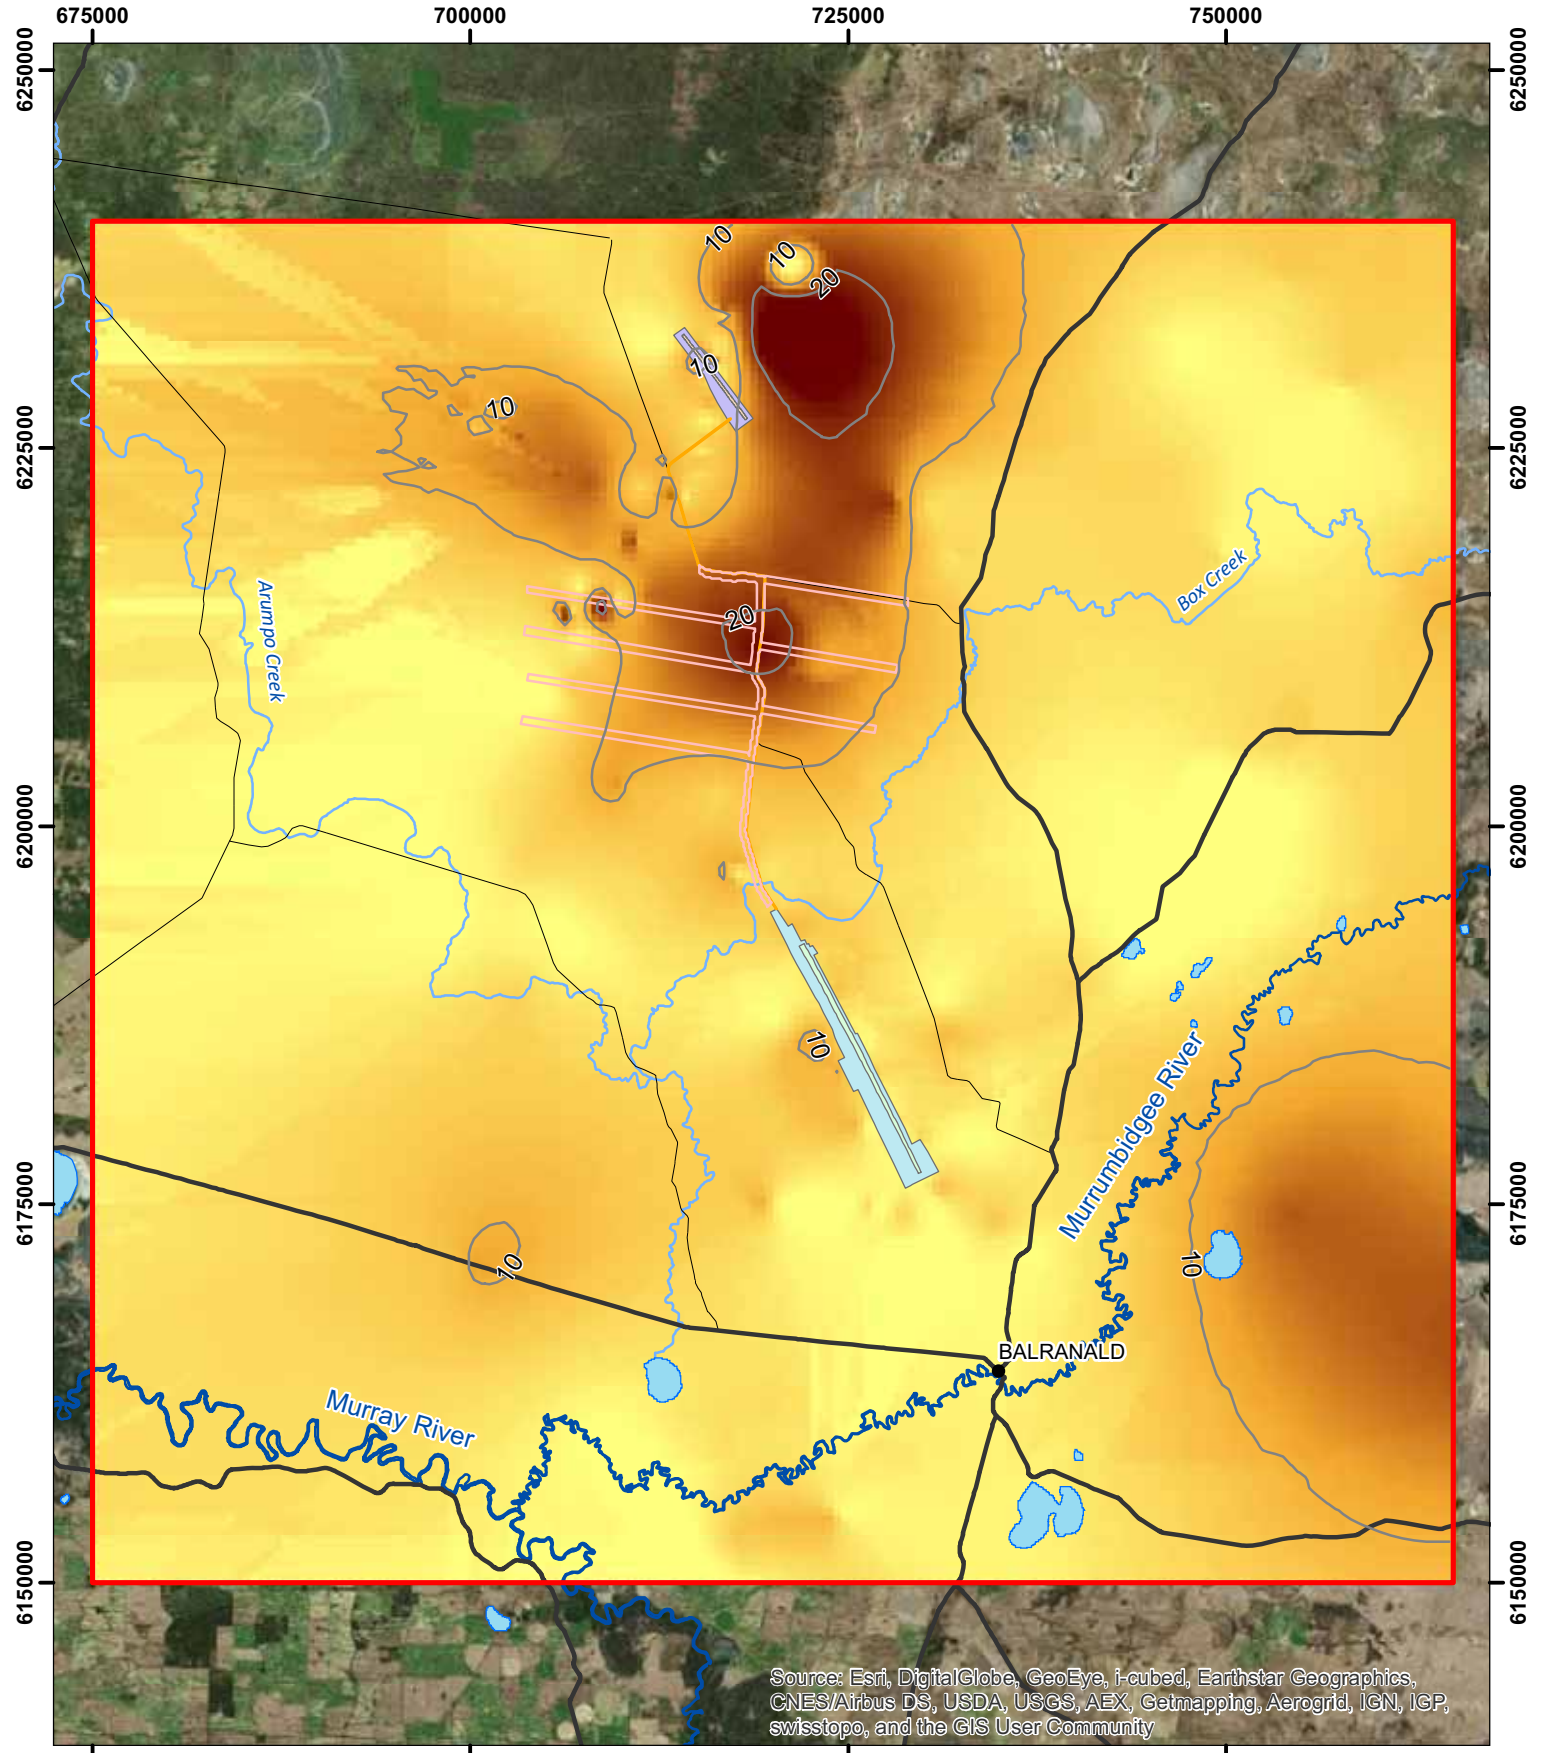


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Thickness contours (m)





BAL2.0 thickness of LPS2 SZ (layer 6)



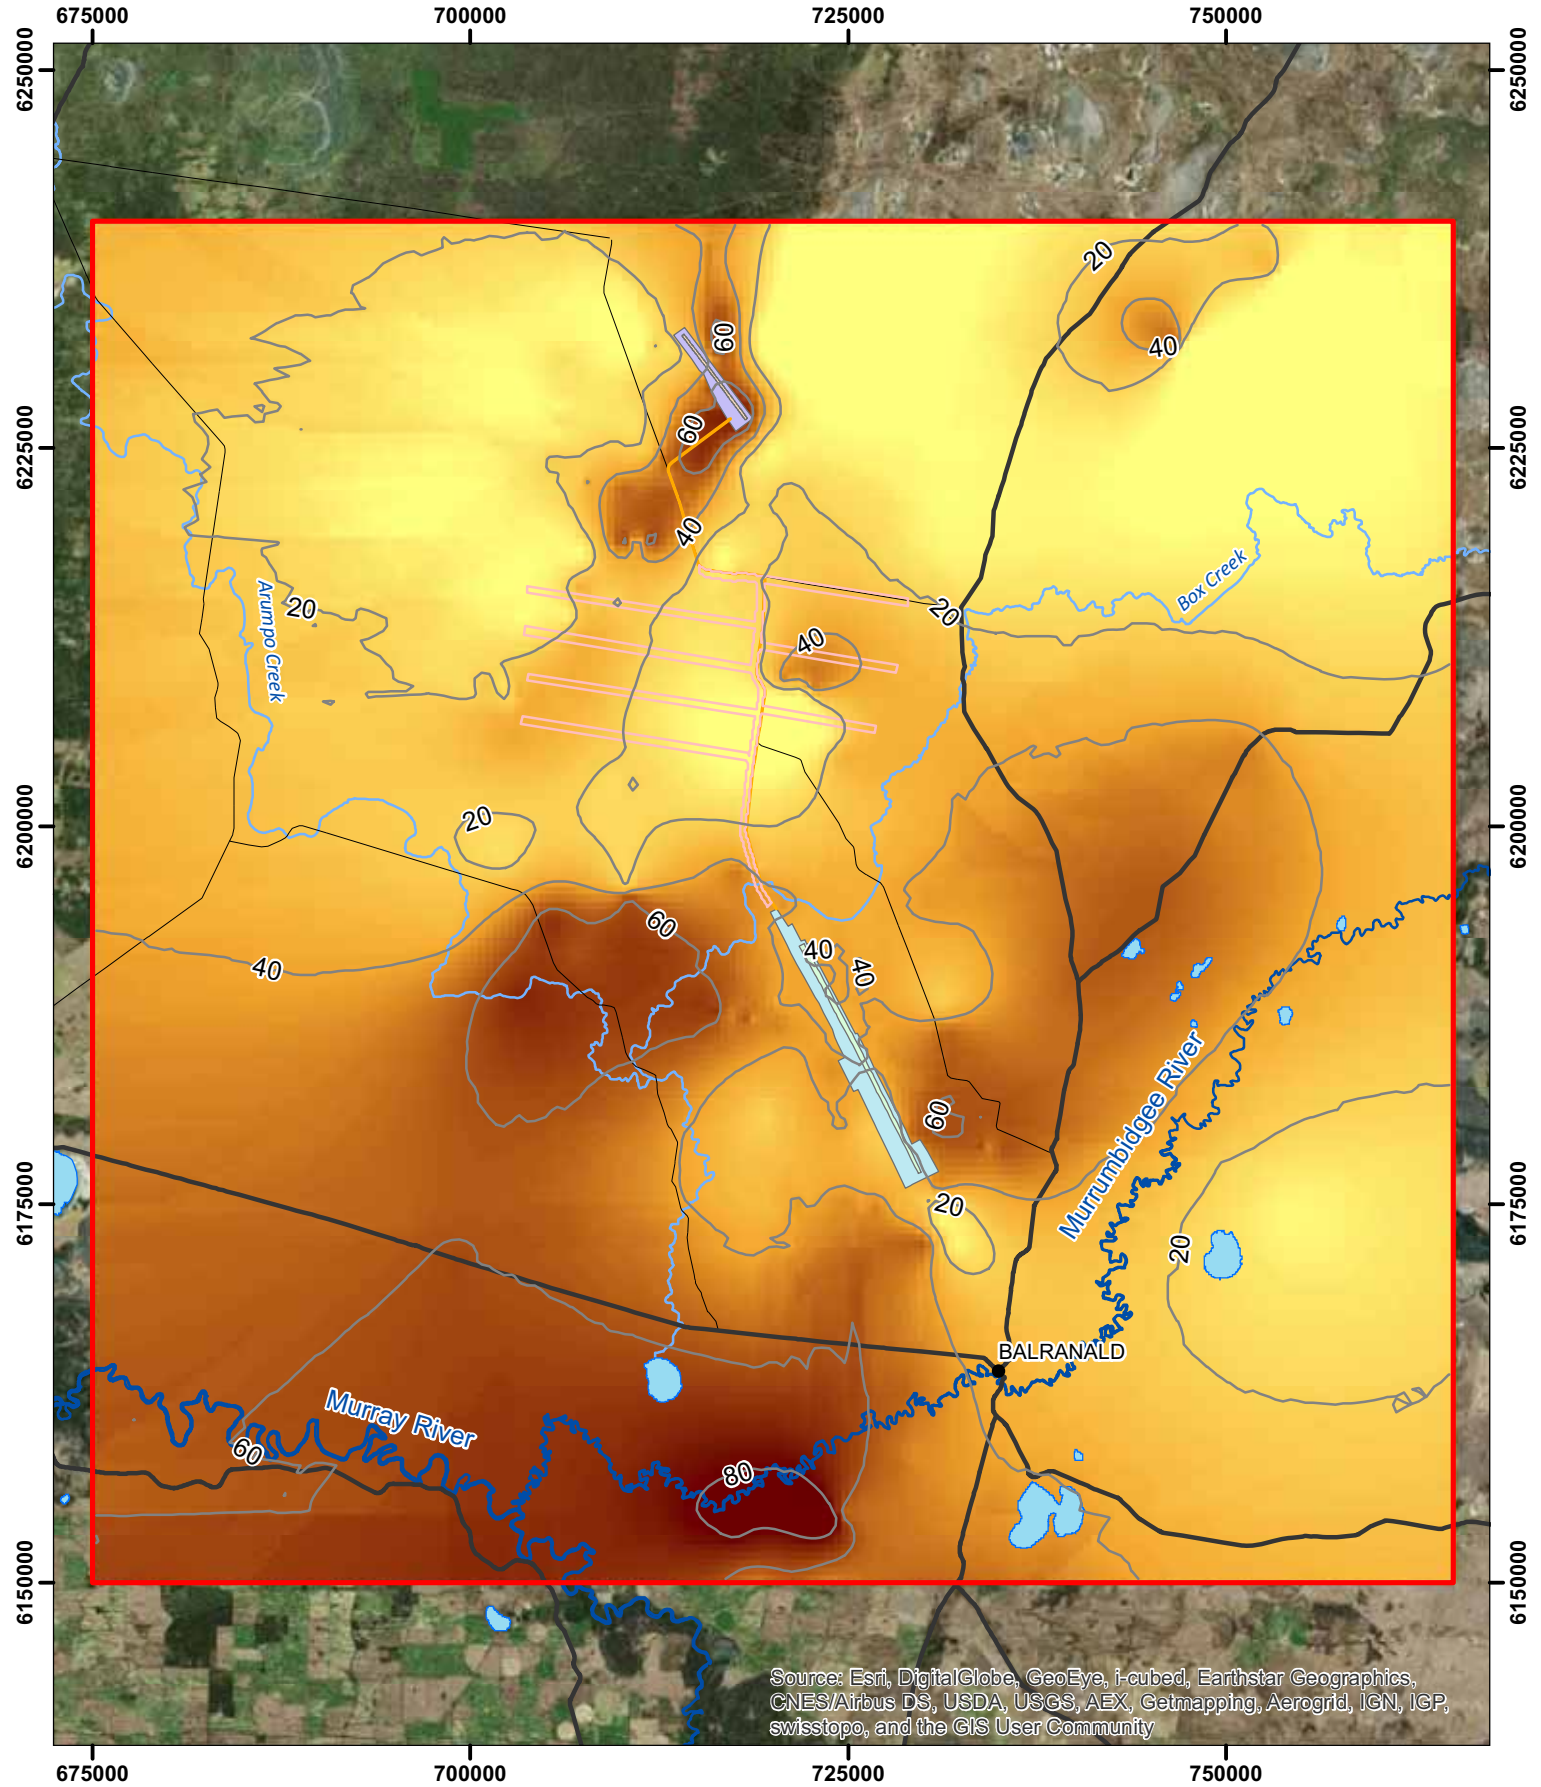


- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection

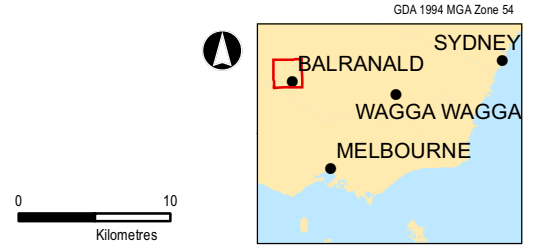



BAL2.0 thickness of LPS2 LS (layer 7)



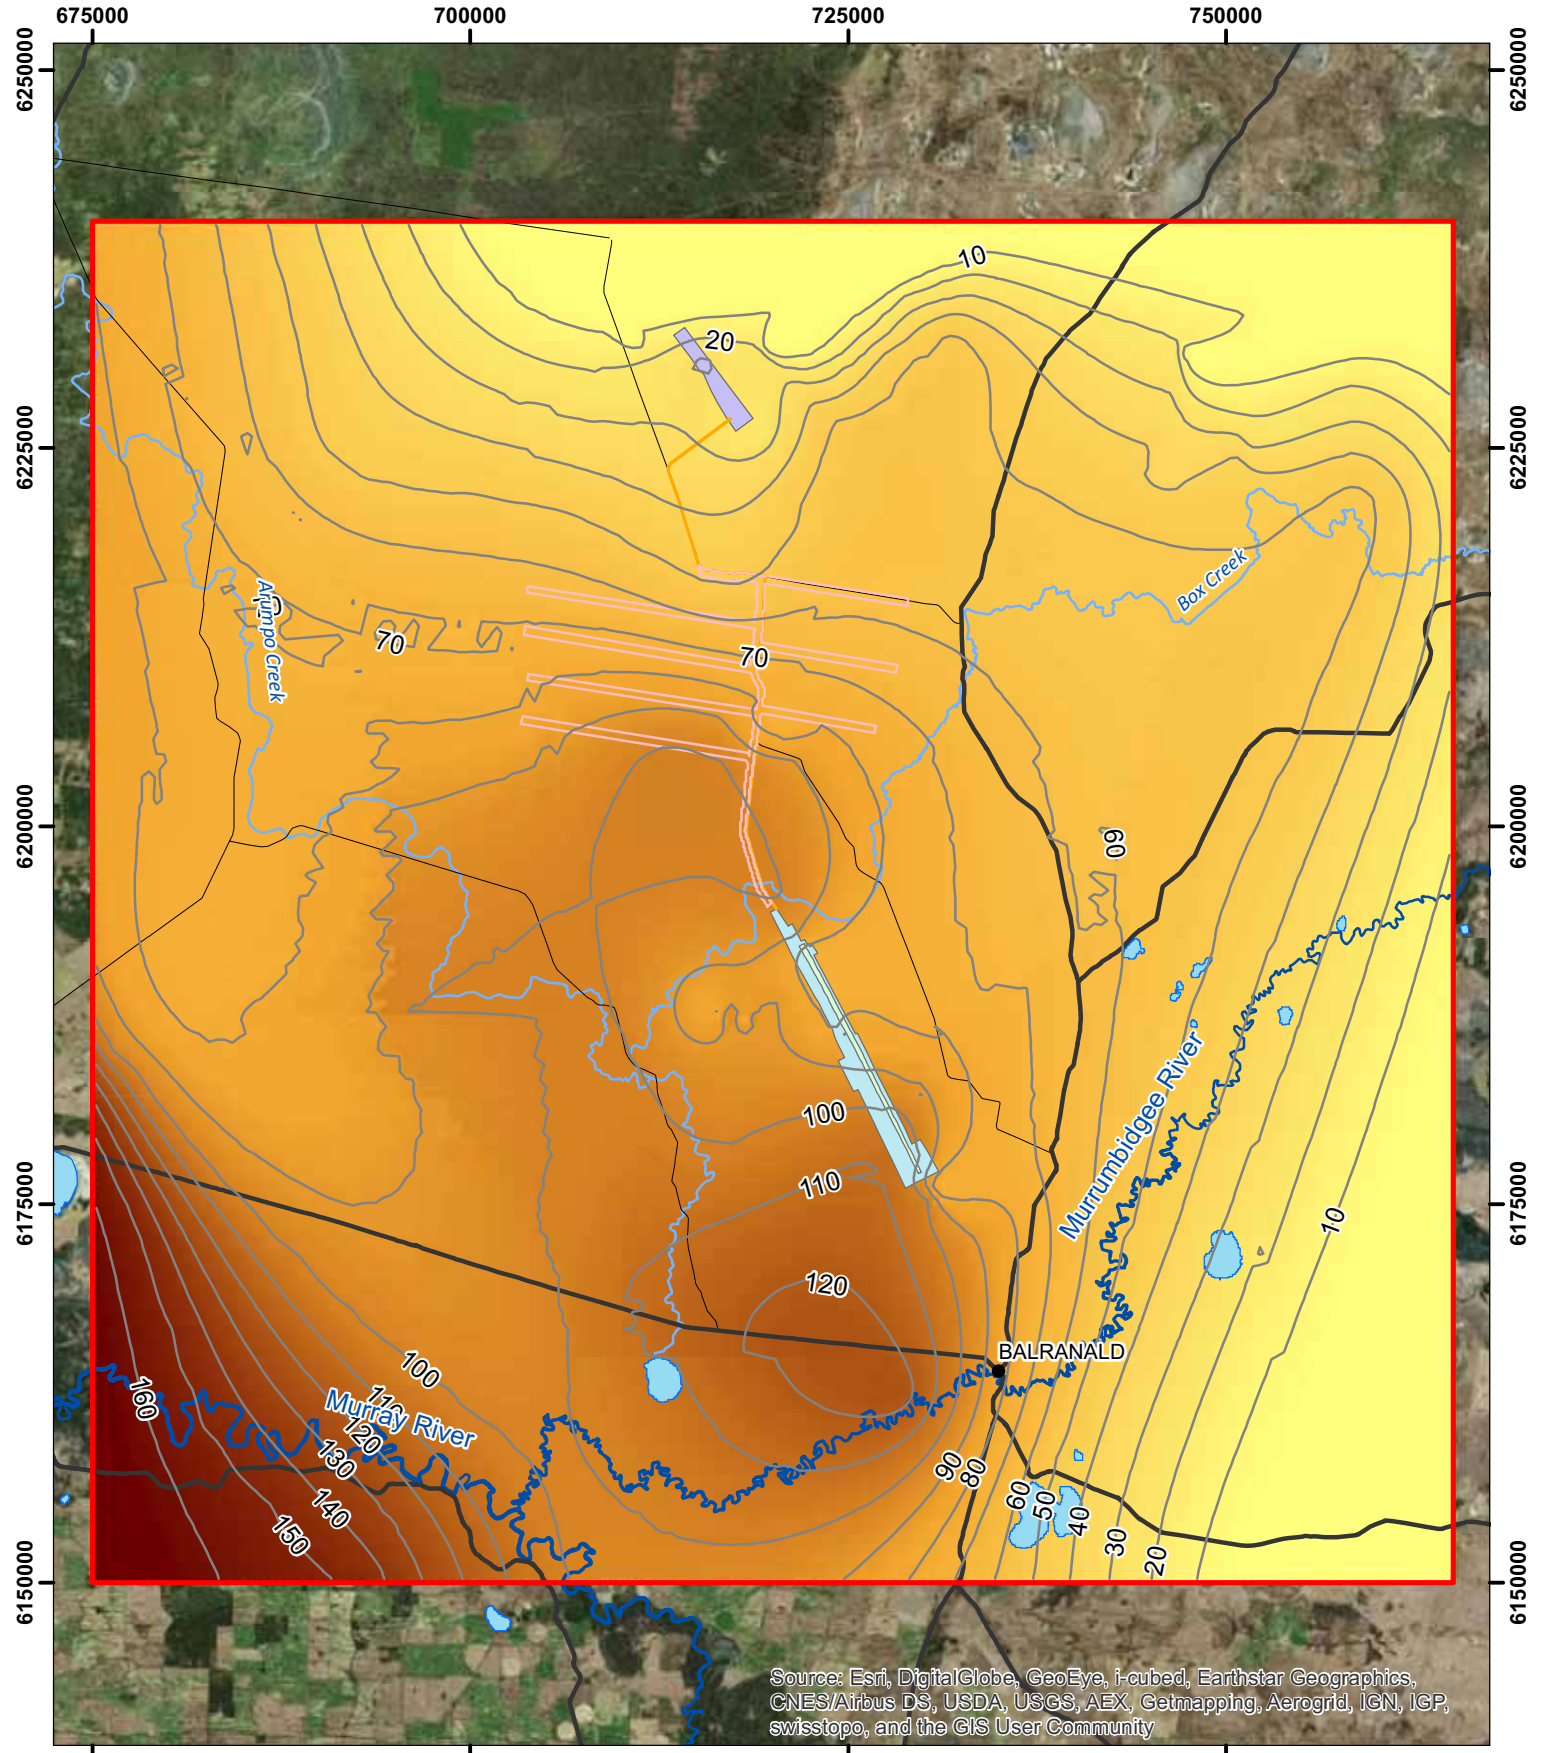


- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area

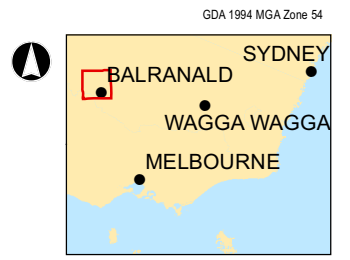



BAL2.0 thickness of Geera Clay (layer 8)



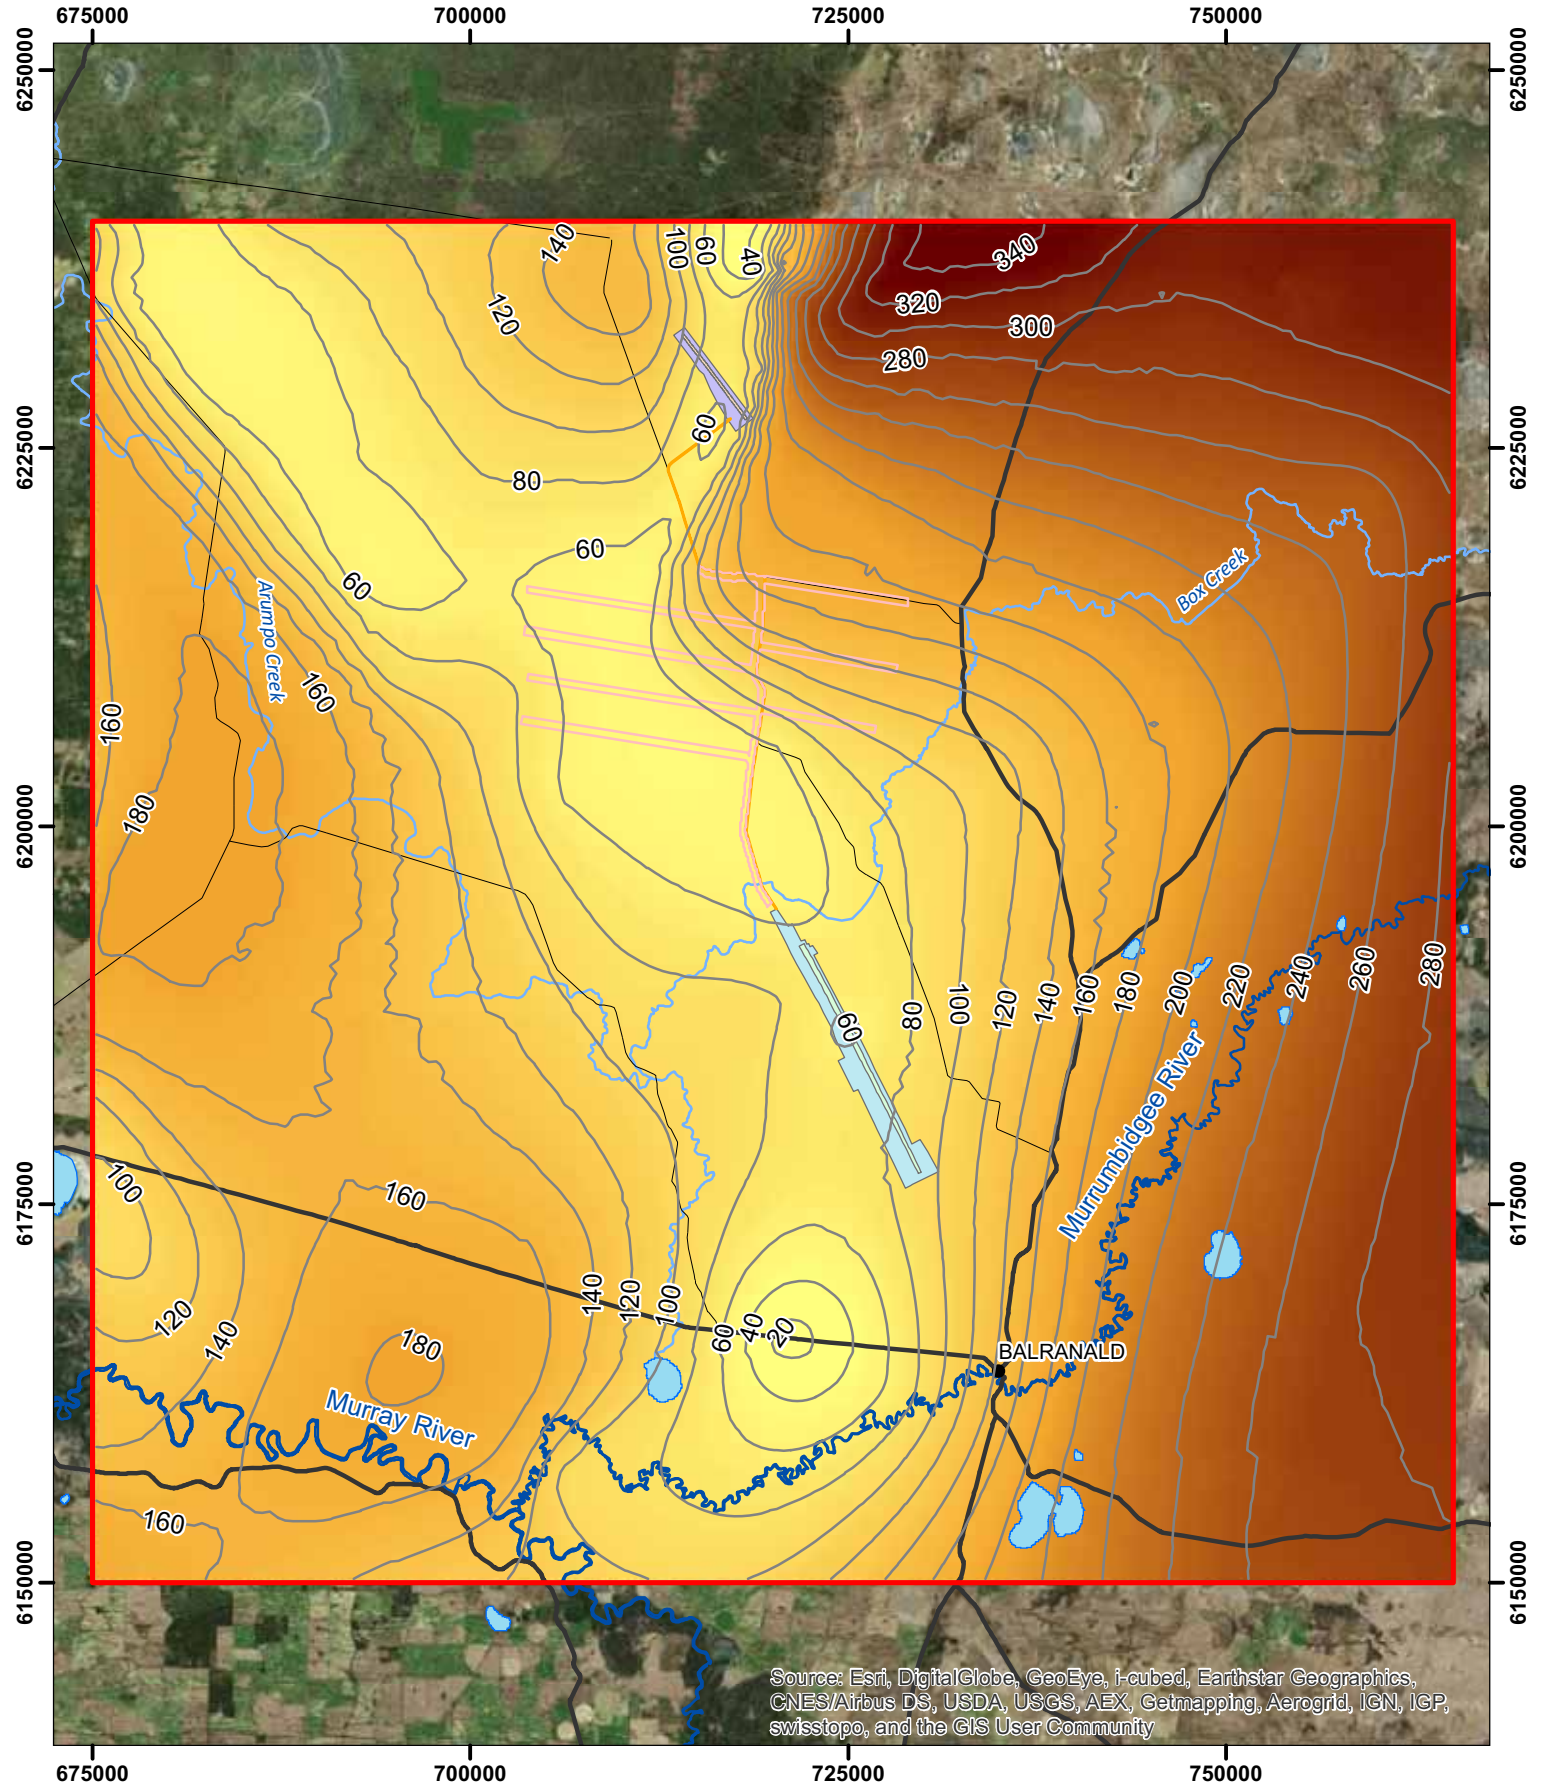

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- BAL2.0 model domain
- EIS offpath injection area
- Thickness contours (m)



BAL2.0 thickness of Olney Formation (layer 9)



Appendix D. Modelled drawdown for local-scale models

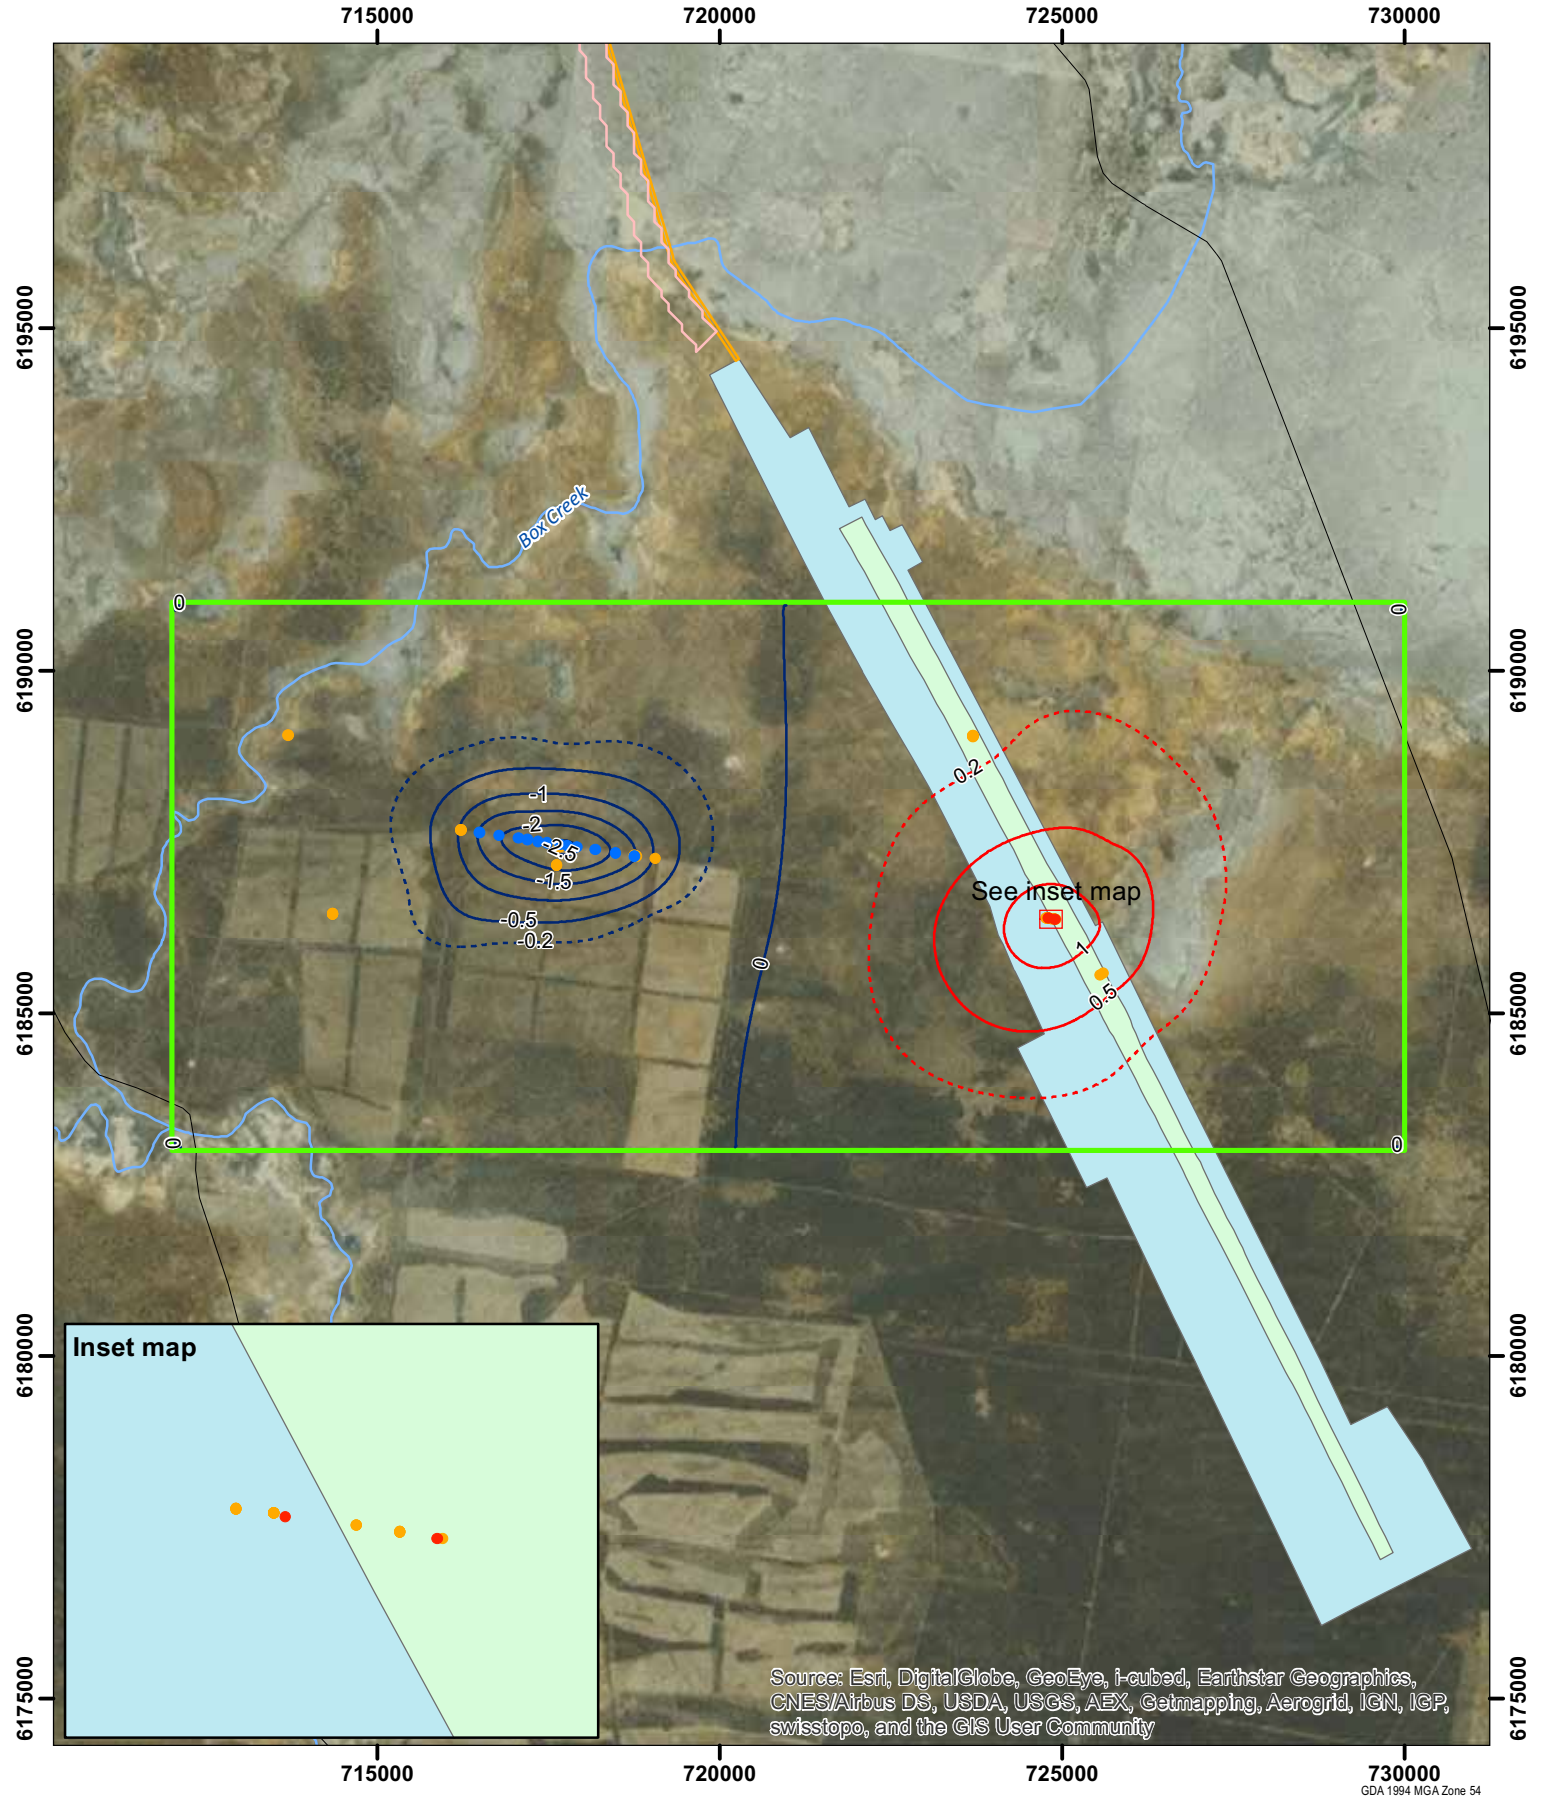


- Minor Road
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- LTT 1.0 model domain
- EIS offpath injection area
- Injection
- Production
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



LTT1.0 modelled drawdown in Shepparton Formation (deep) on 10/07/2014



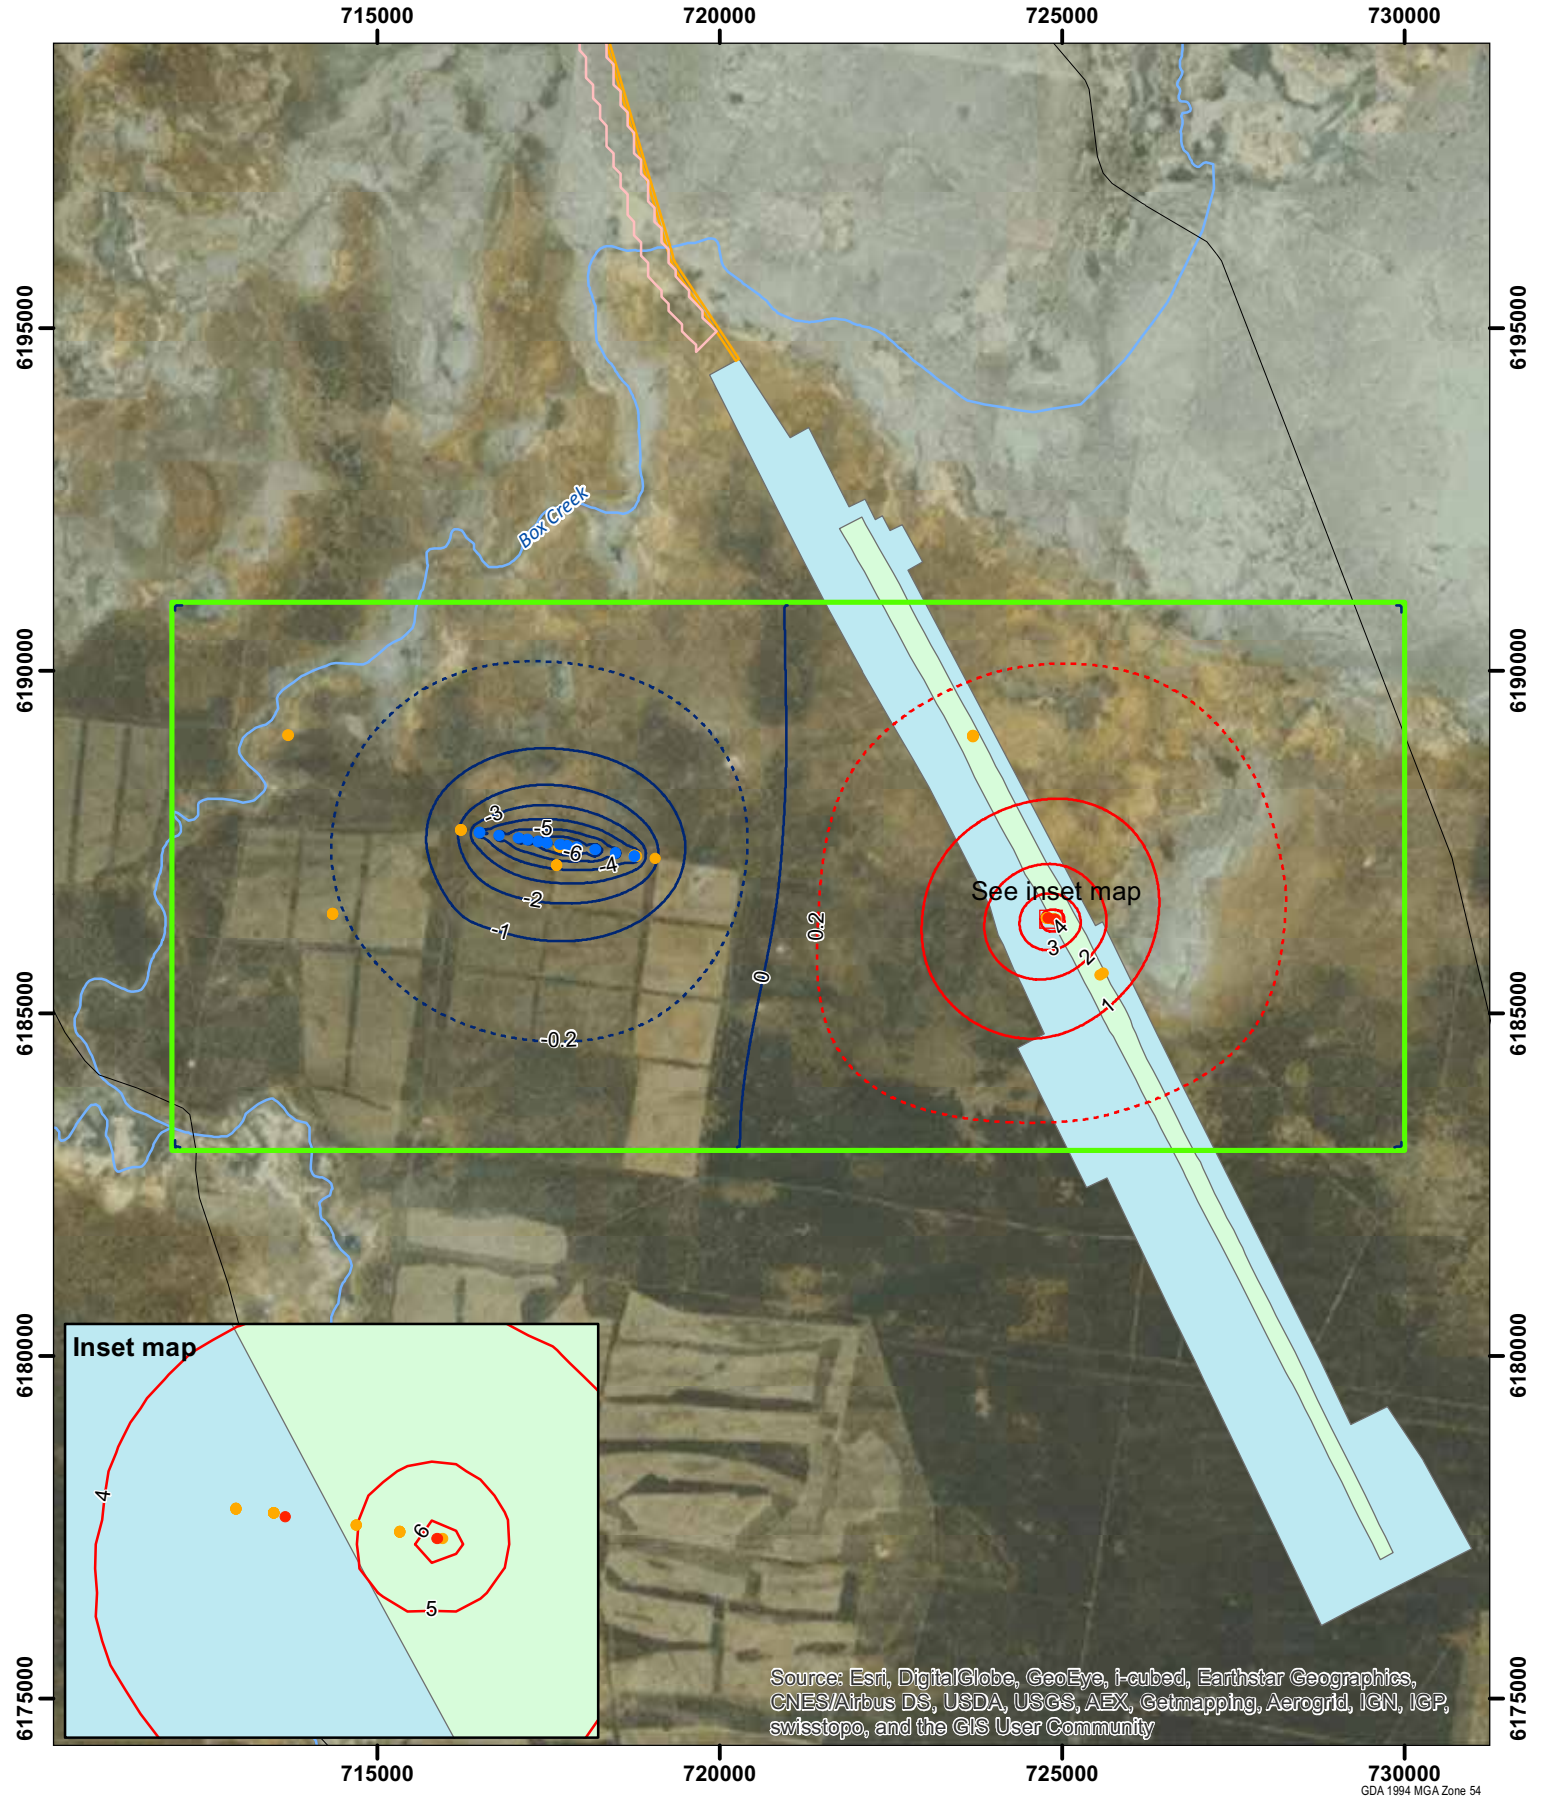


- Minor Road
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- LTT 1.0 model domain
- EIS offpath injection area
- Injection
- Production
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



LTT1.0 modelled drawdown in LPS1 FS on 10/07/2014



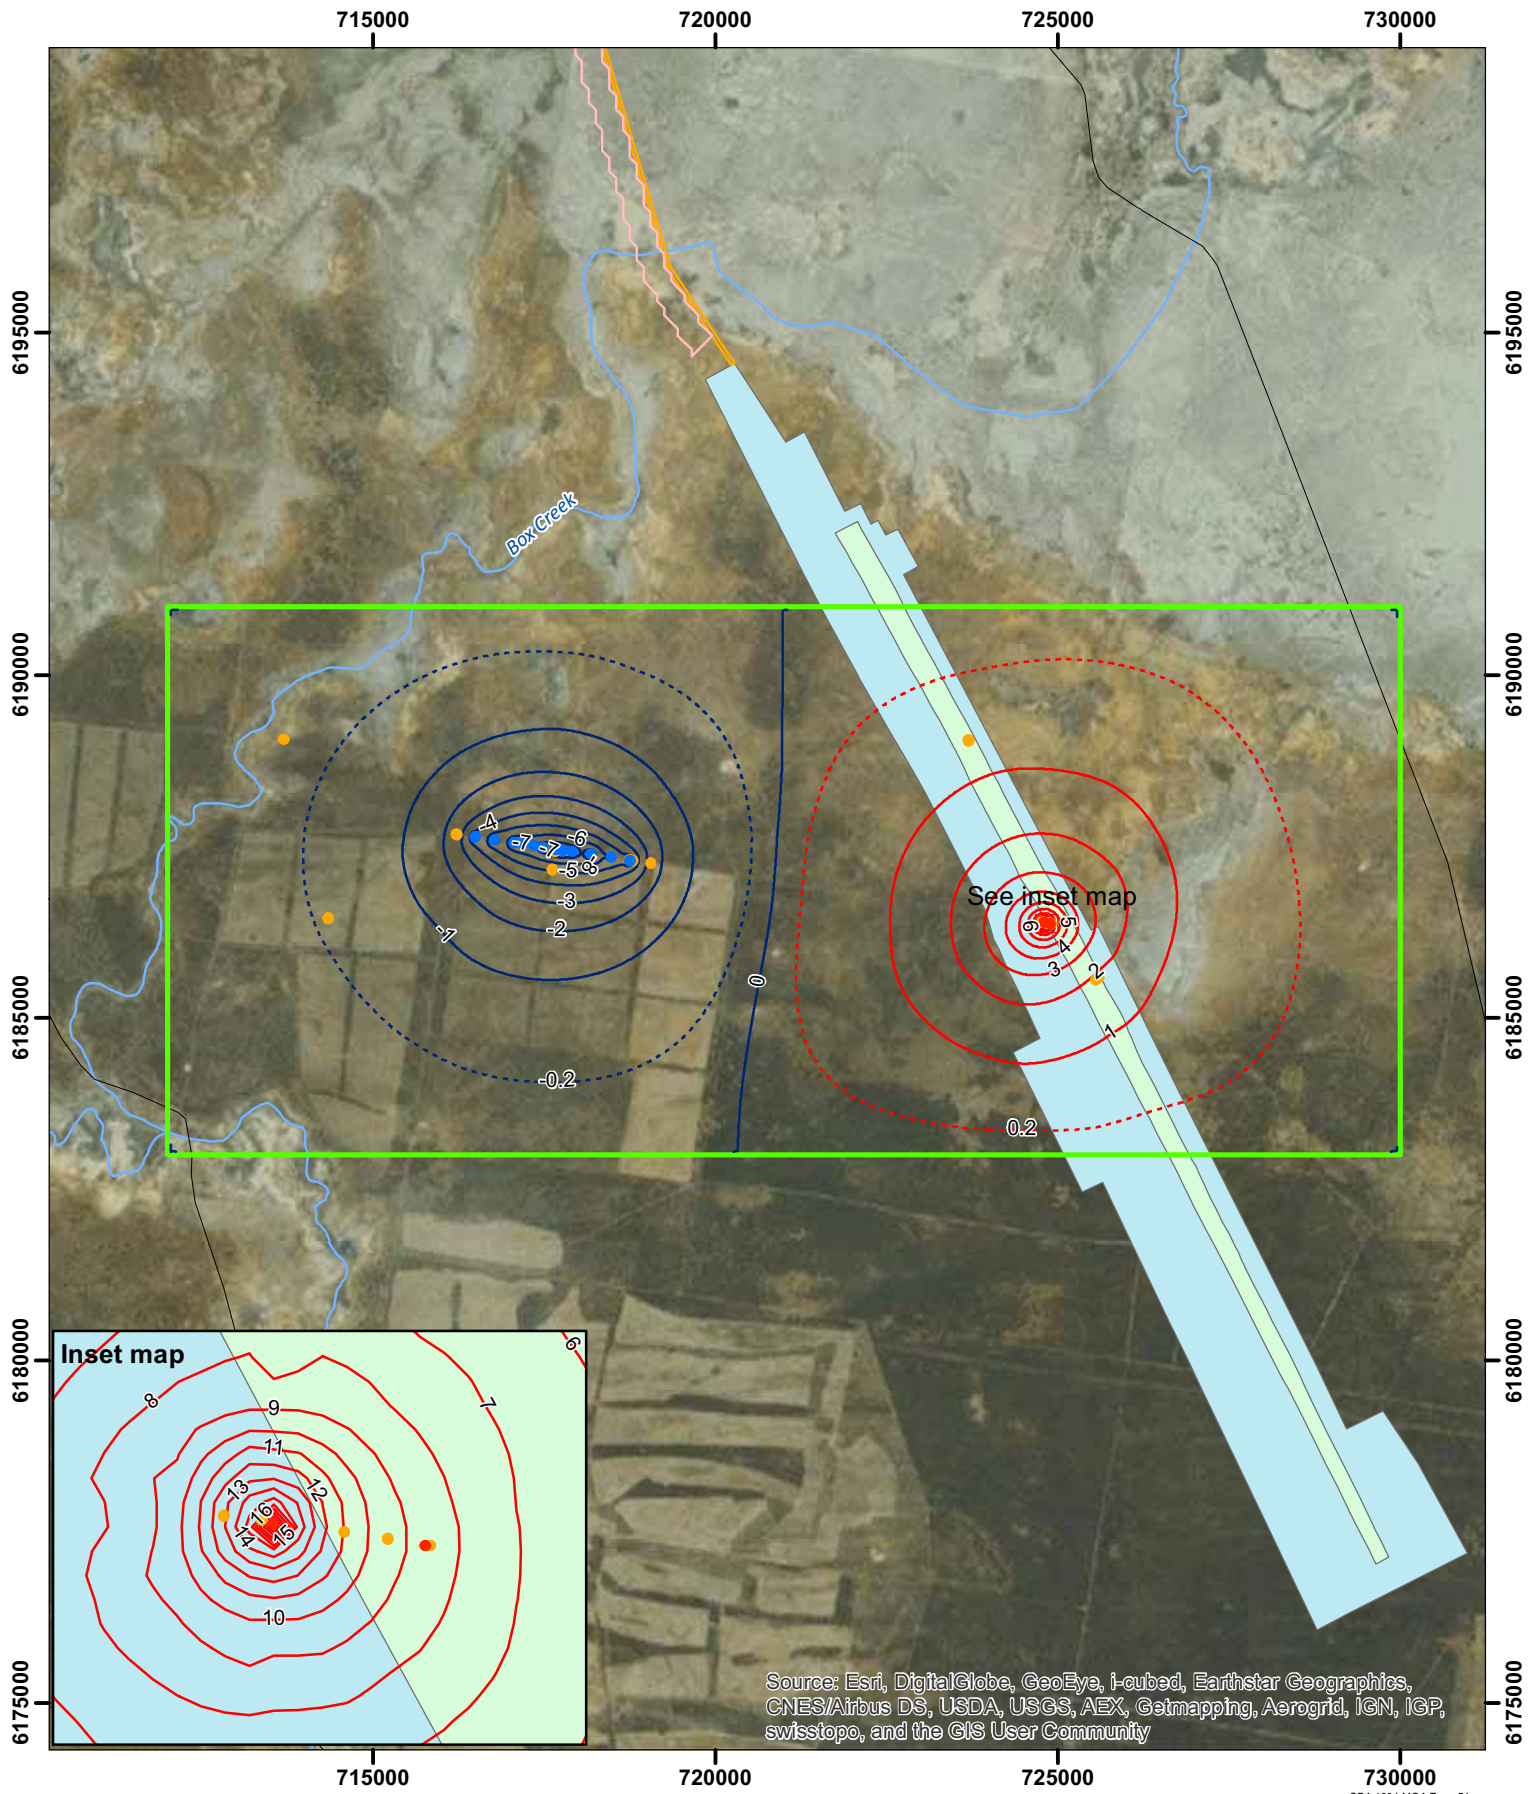

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community



GDA 1994 MGA Zone 54

- Minor Road
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- LTT 1.0 model domain
- EIS offpath injection area
- Injection
- Production
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)




LTT1.0 modelled drawdown in LPS1 SZ on 10/07/2014



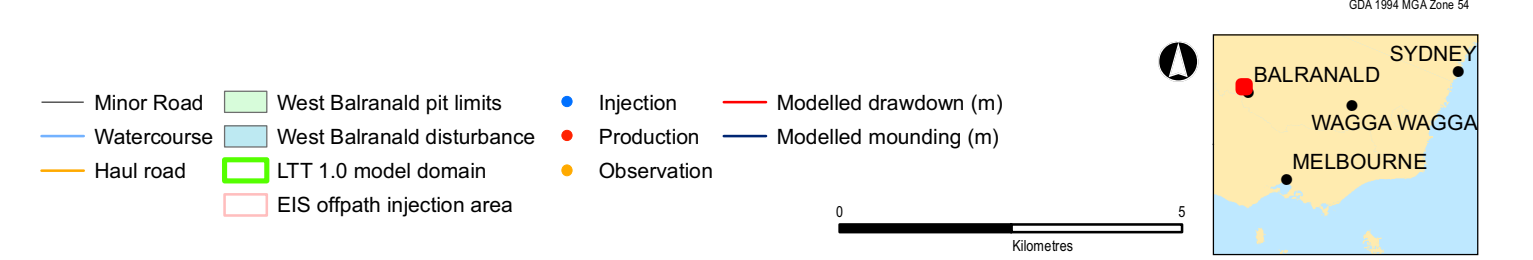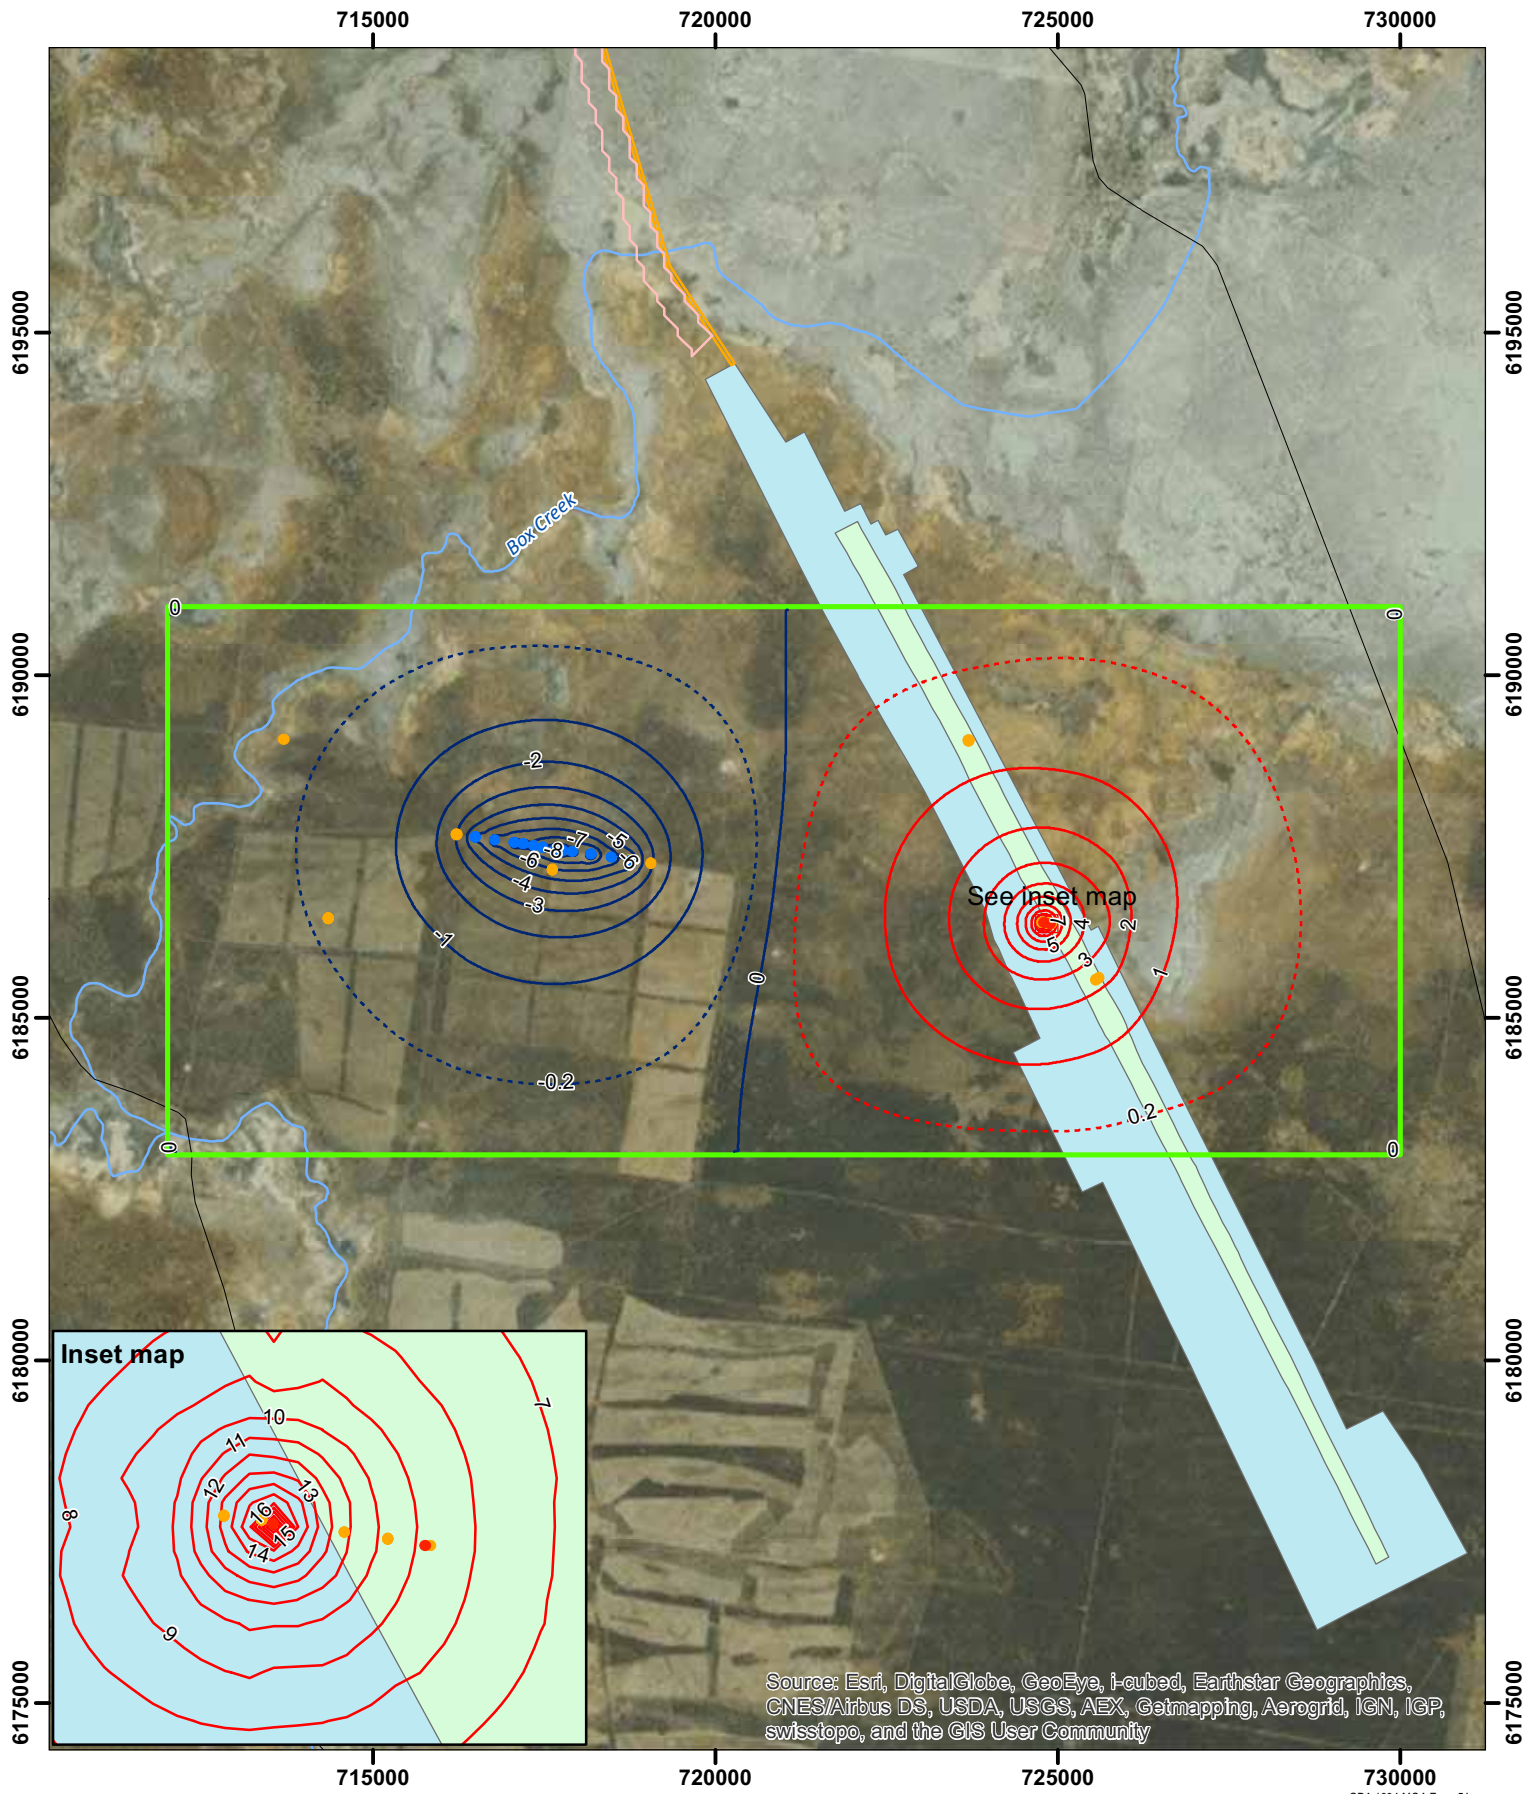

LTT1.0 modelled drawdown in LPS1 LS/LPS2 FS on 10/07/2014



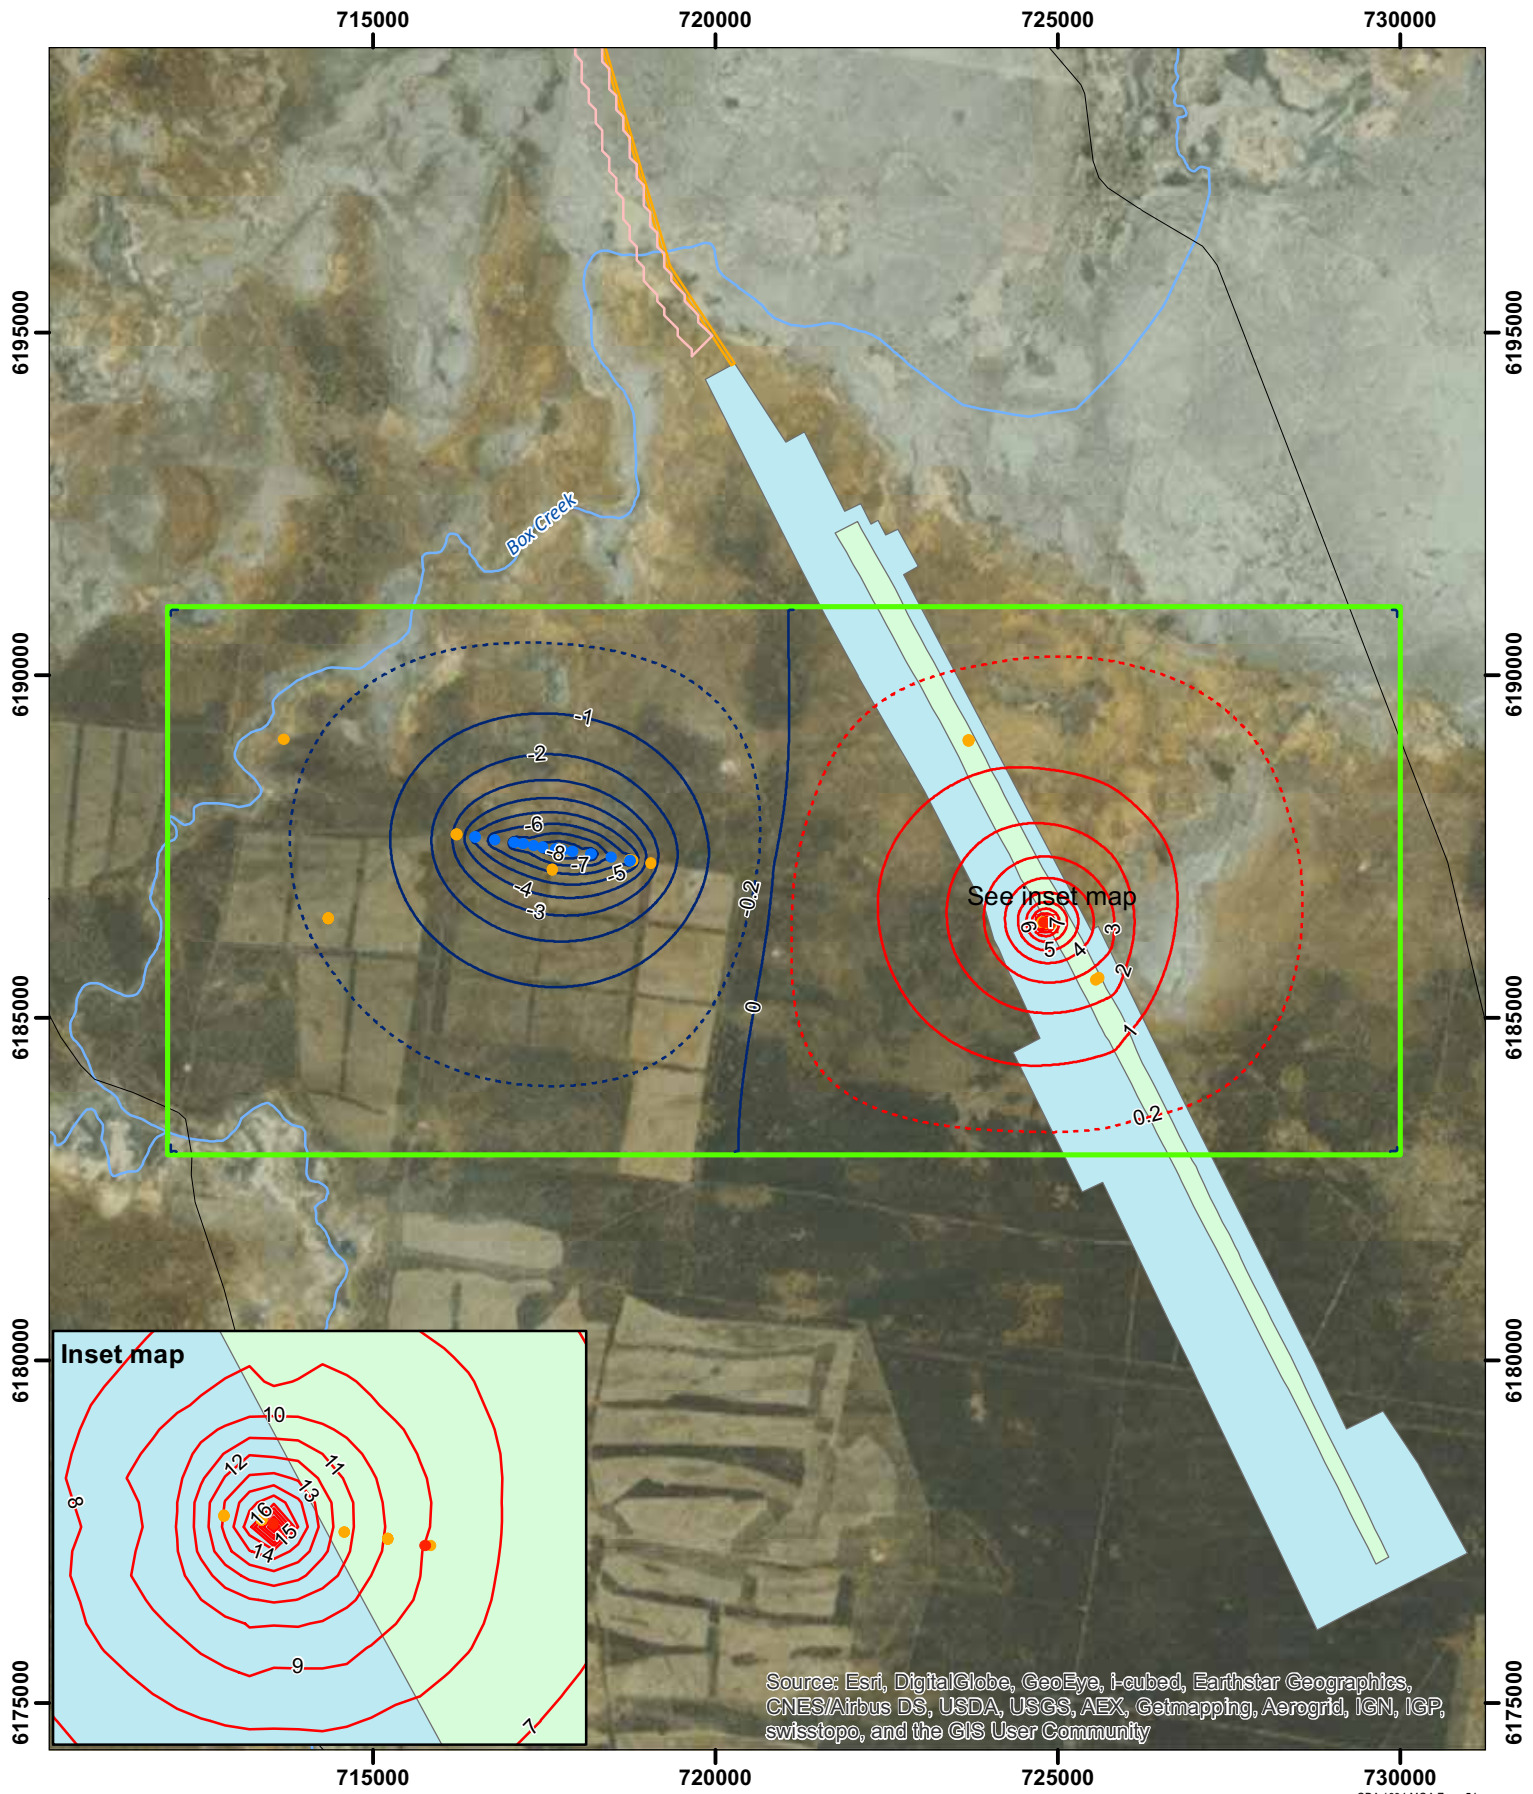

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Minor Road
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- LTT 1.0 model domain
- EIS offpath injection area
- Injection
- Production
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



LTT1.0 modelled drawdown in LPS2 SZ on 10/07/2014



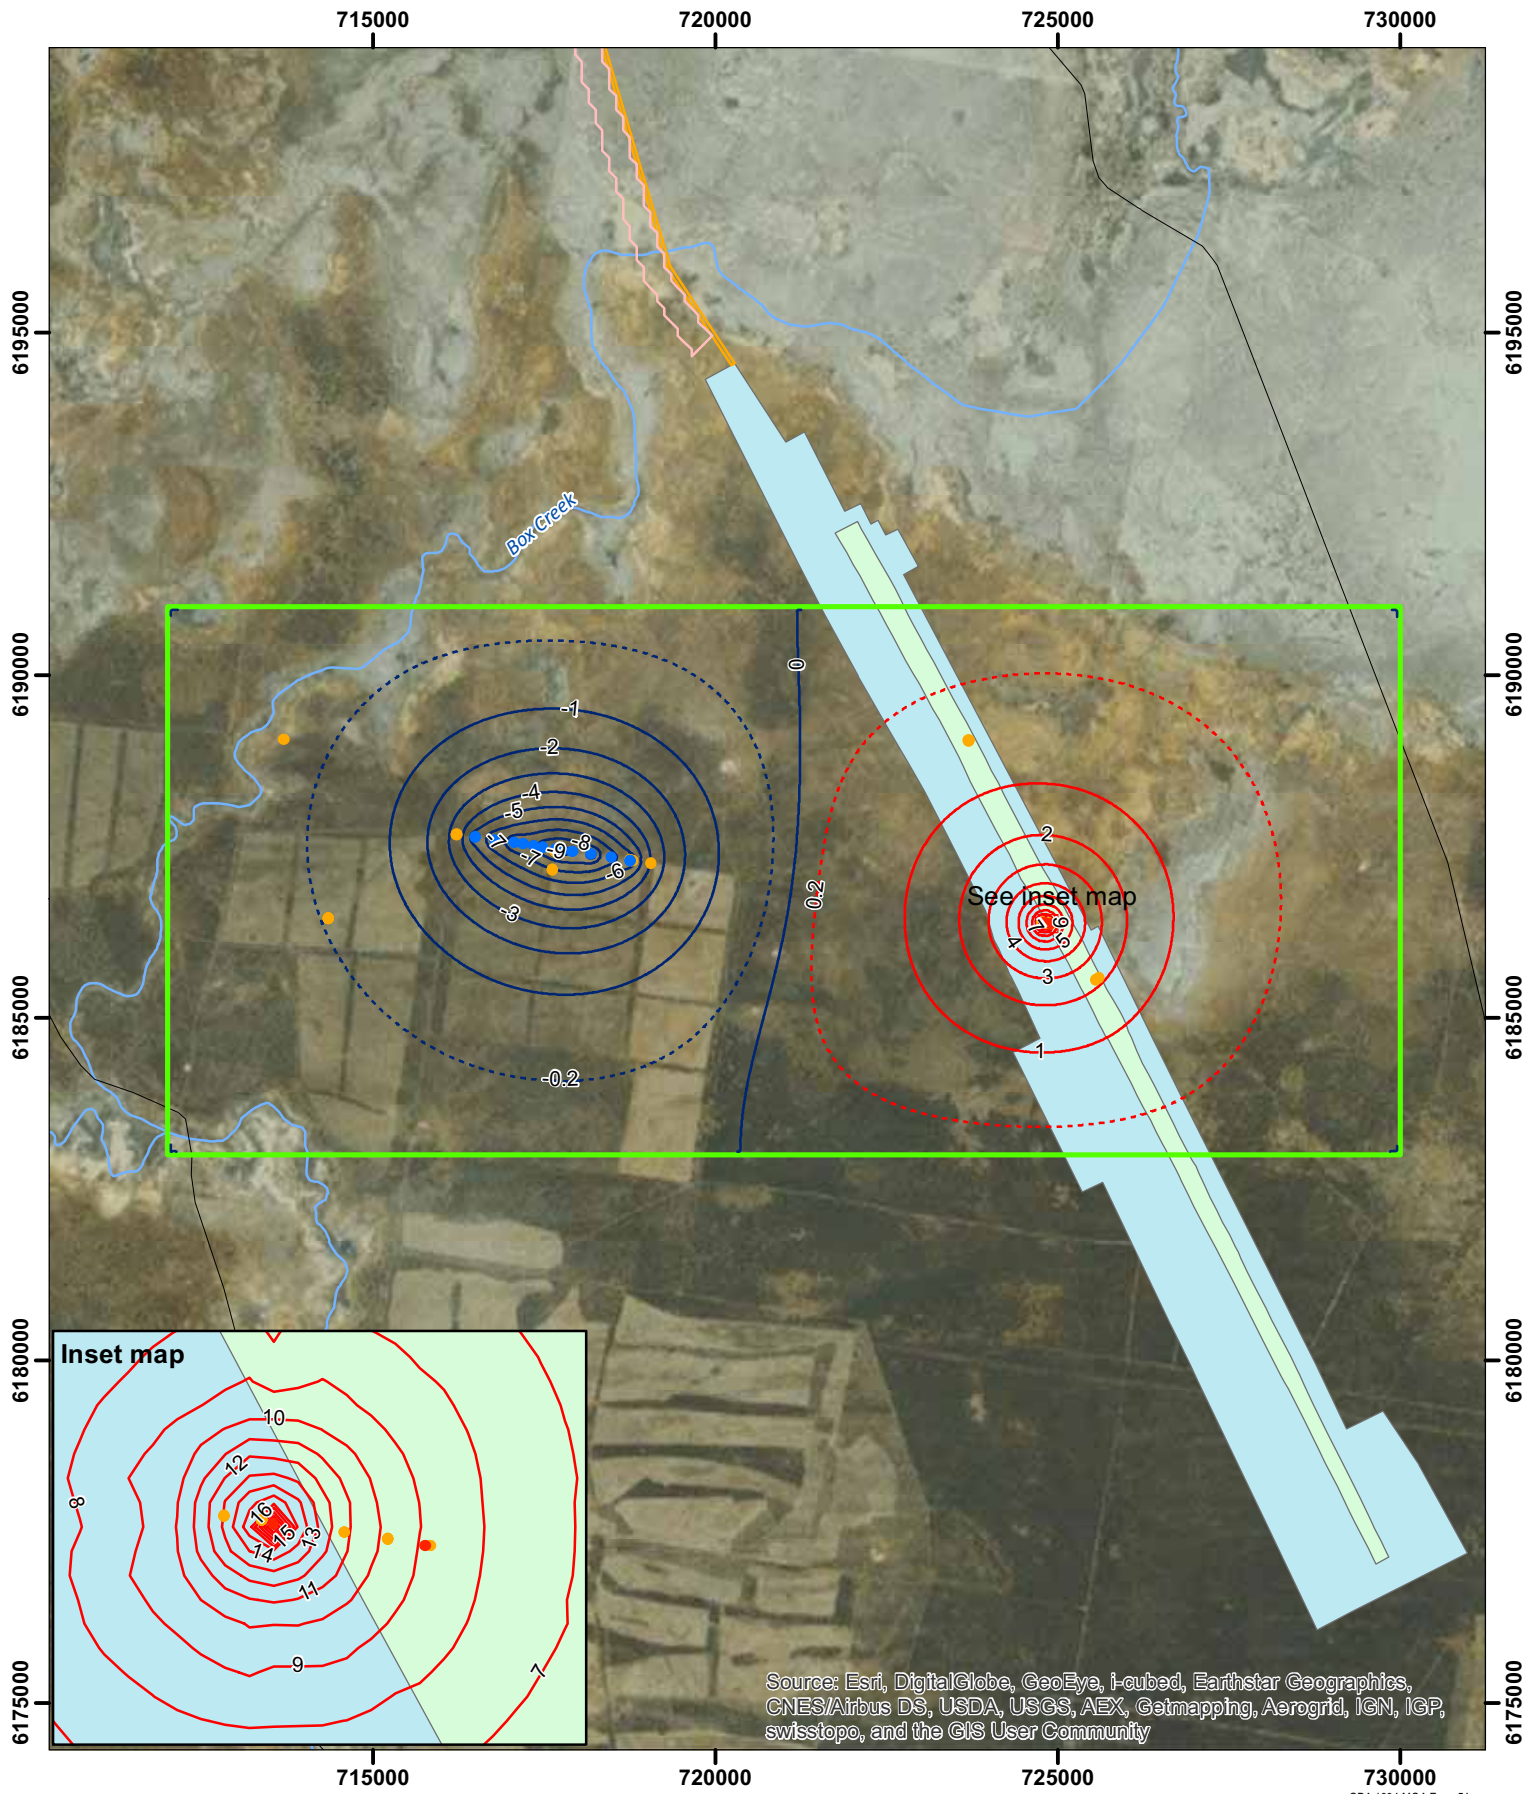

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Minor Road
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- LTT 1.0 model domain
- EIS offpath injection area
- Injection
- Production
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



LTT1.0 modelled drawdown in LPS2 LS on 10/07/2014



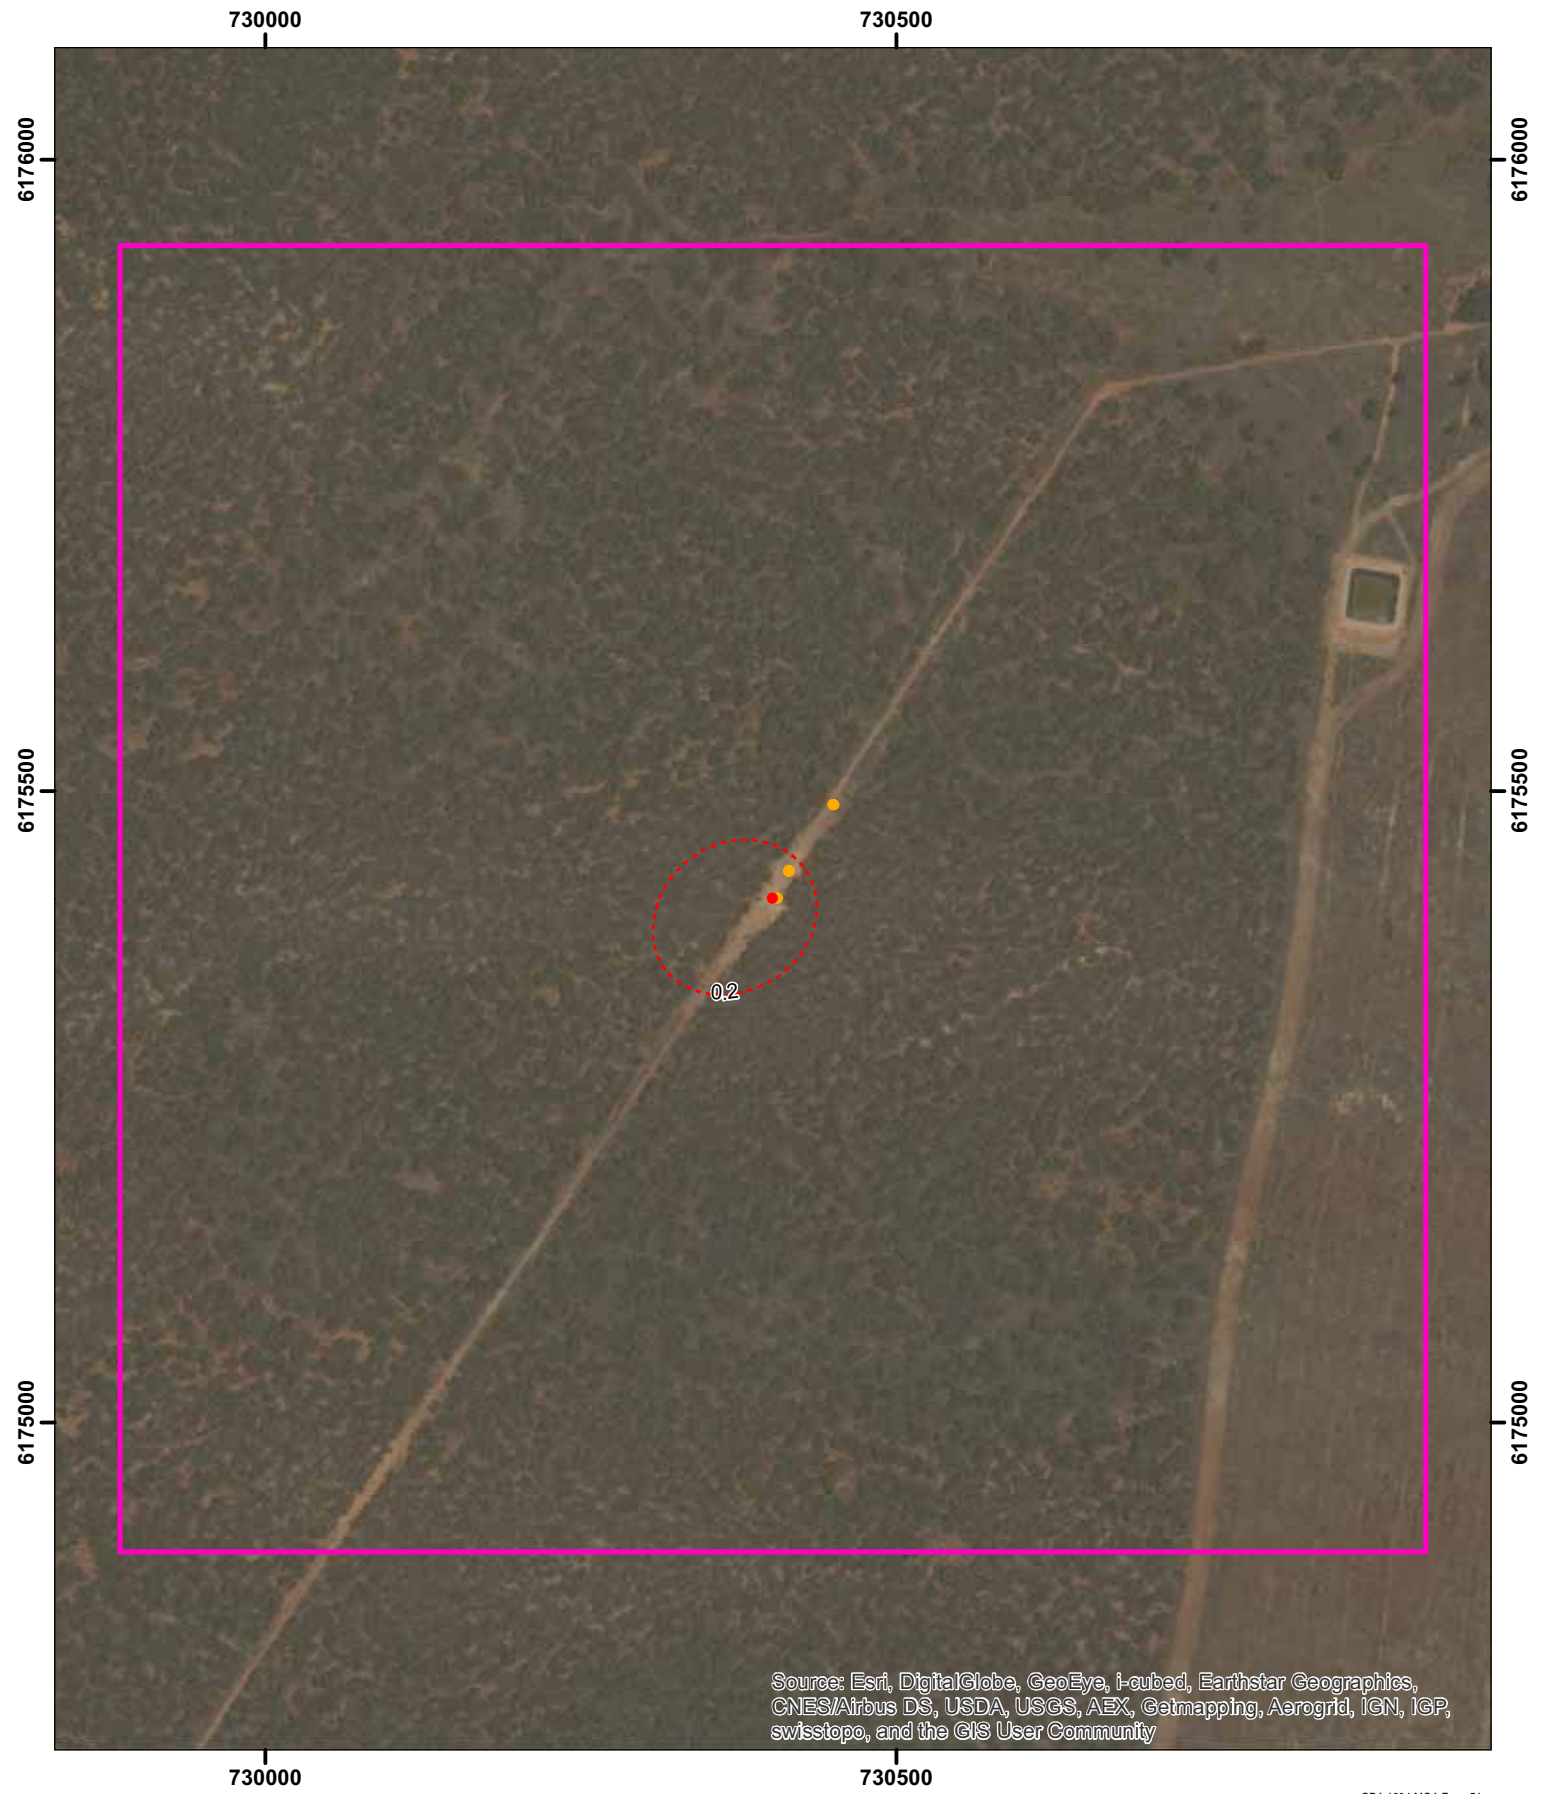


- TN1 1.0 model domain
- Production
- Observation
- Modelled drawdown (m)



TN1 1.0 modelled drawdown in Shepparton Formation (deep) on 21/02/2012



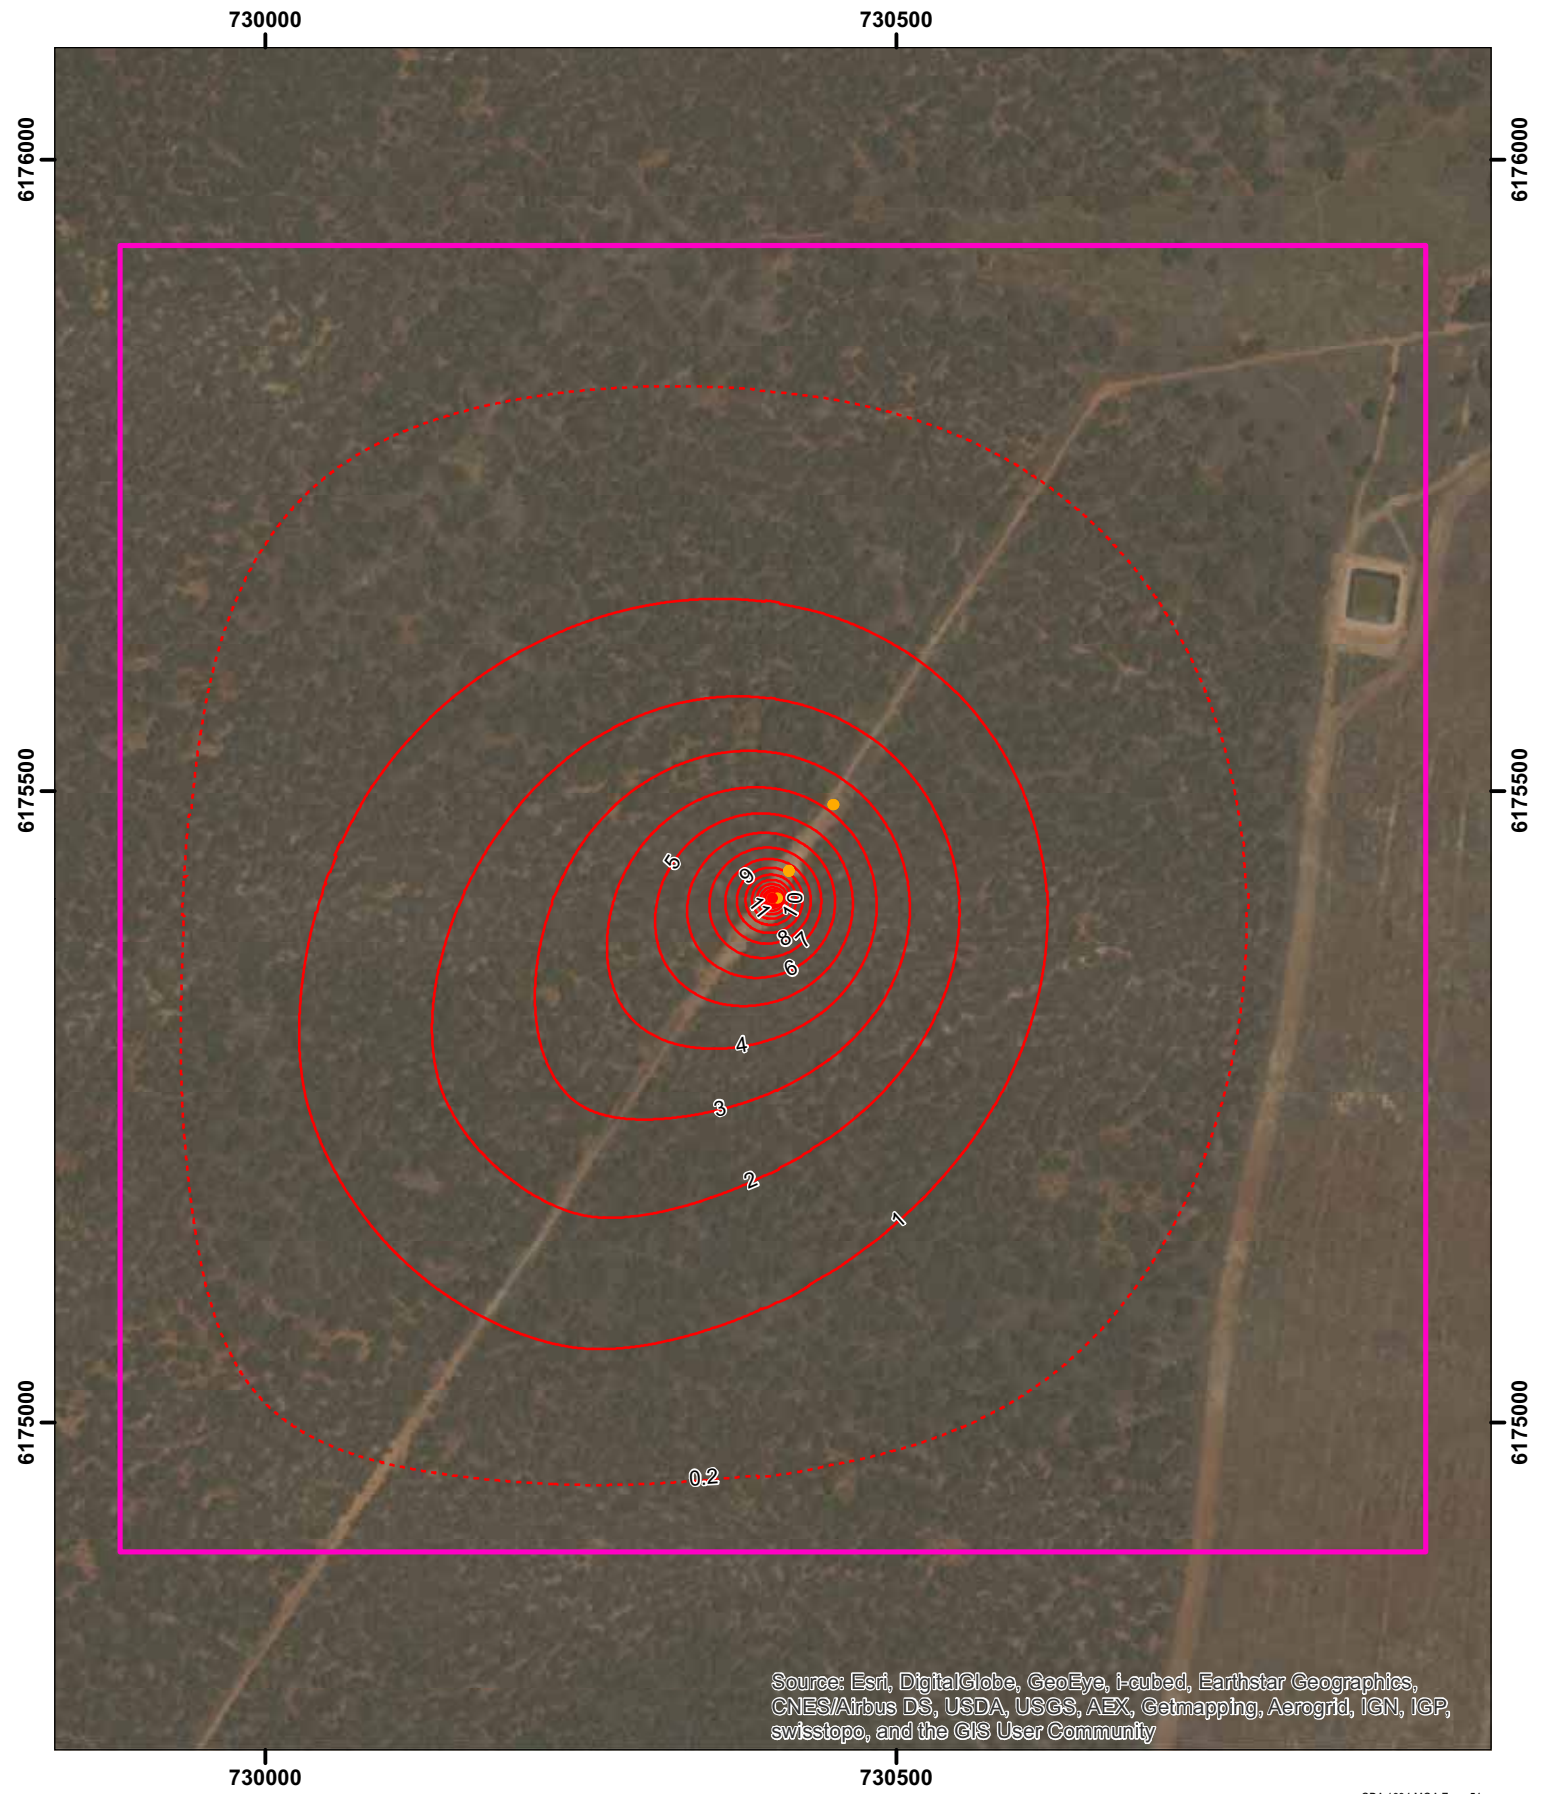

GDA 1994 MGA Zone 54


- TN1 1.0 model domain
- Production
- Observation
- Modelled drawdown (m)



TN1 1.0 modelled drawdown in LPS1 FS on 21/02/2012



I:\VESAI\Projects\WE23875\Technical\Spatial\mxd\Transient Calibration figures\Rev2\TN13 TN1 1.0 Drawdown in the Drawdown in the LPS1 FS.mxd

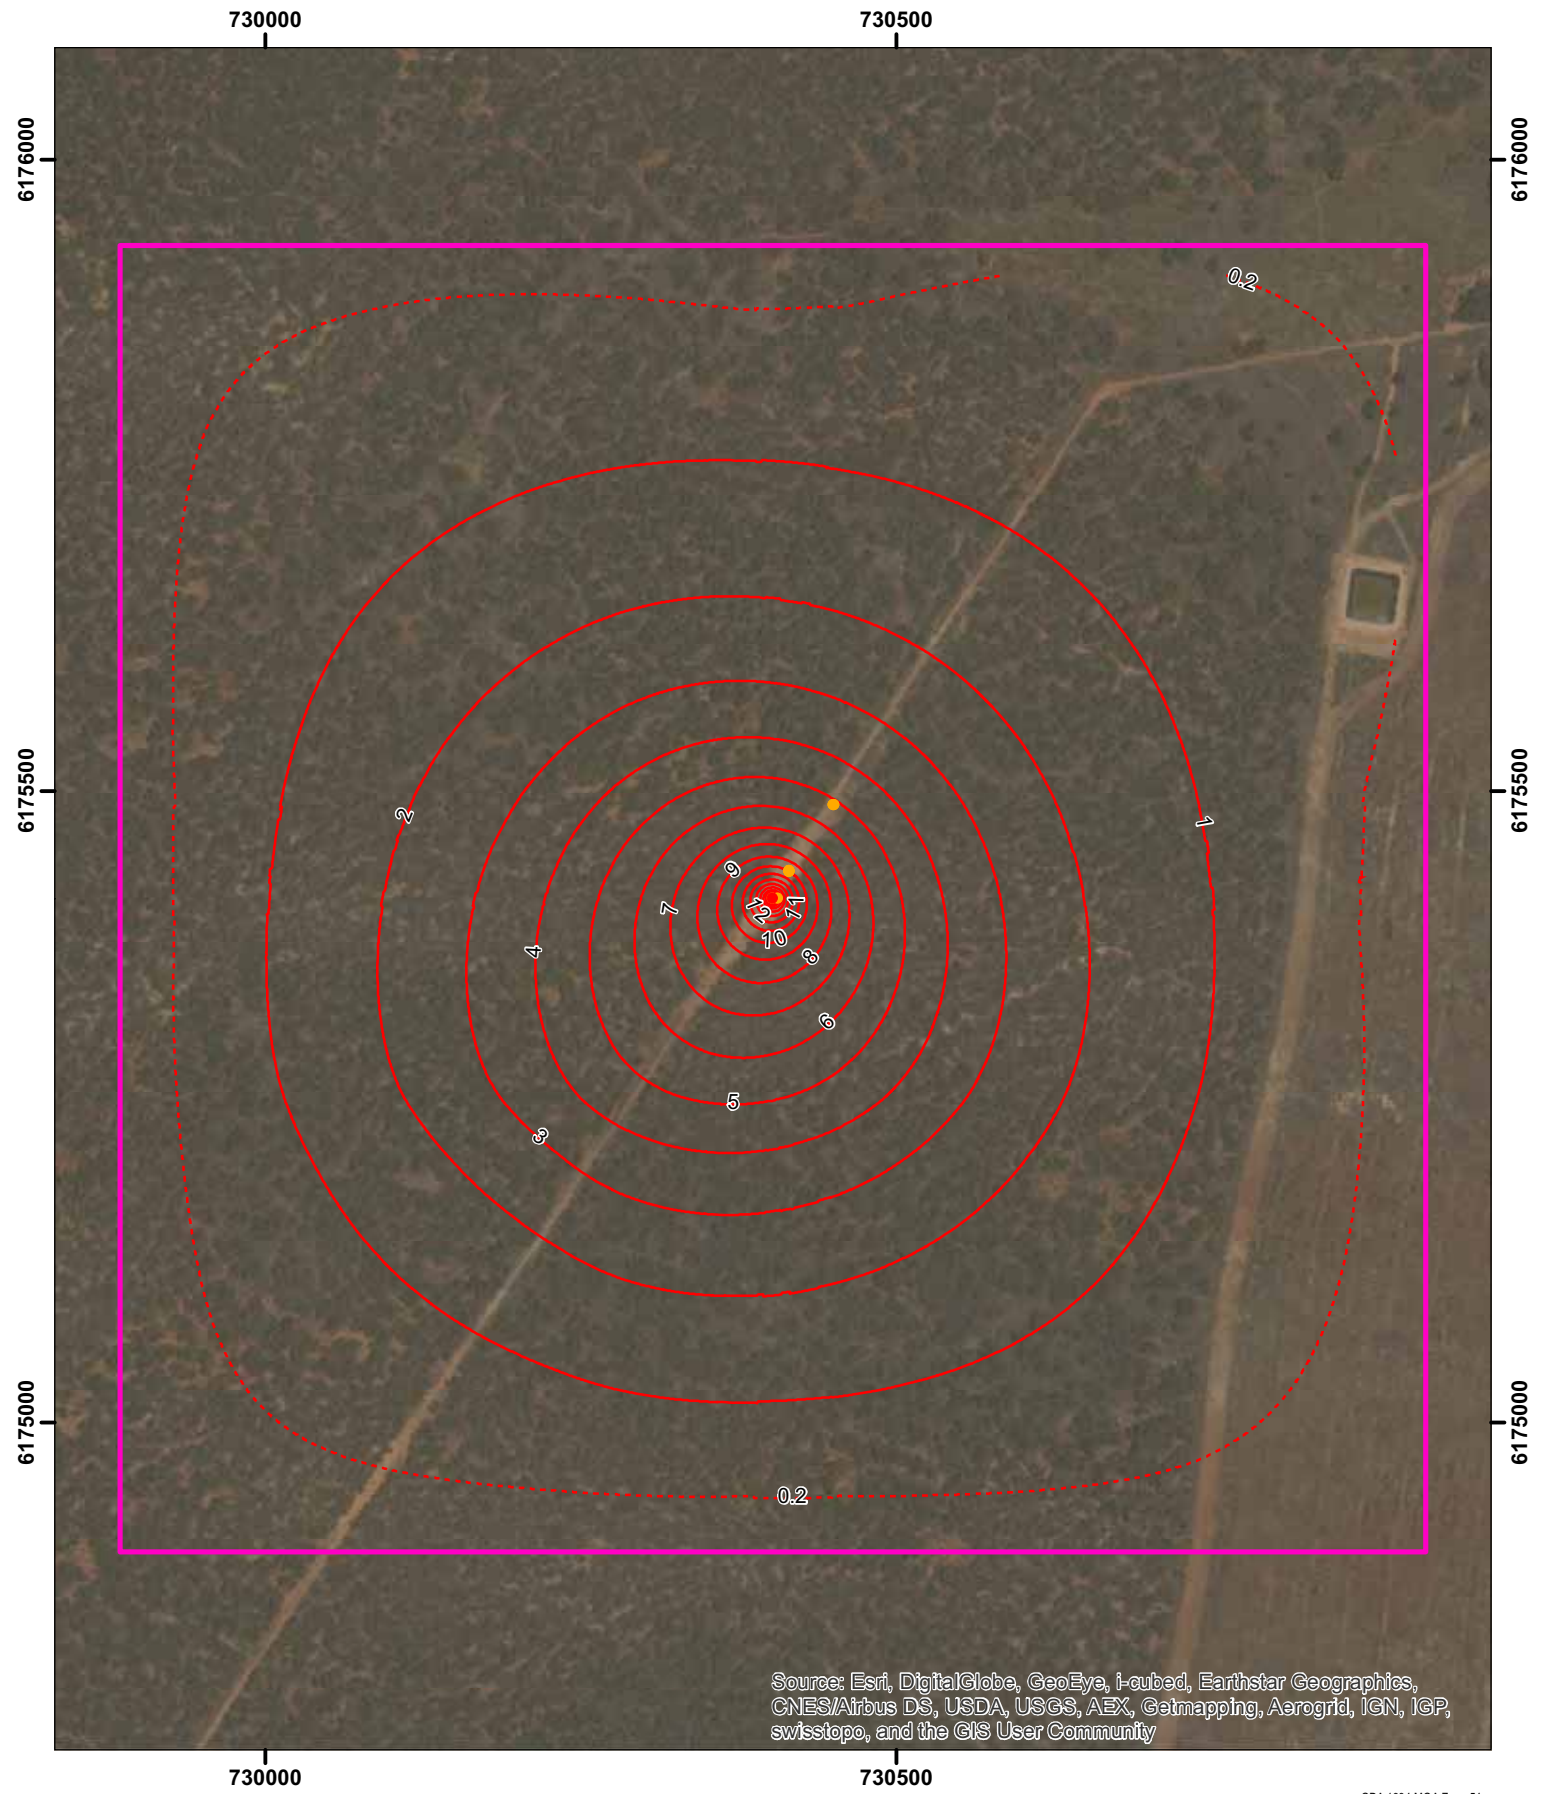


GDA 1994 MGA Zone 54

- TN1 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation



TN1 1.0 modelled drawdown in LPS1 SZ on 21/02/2012



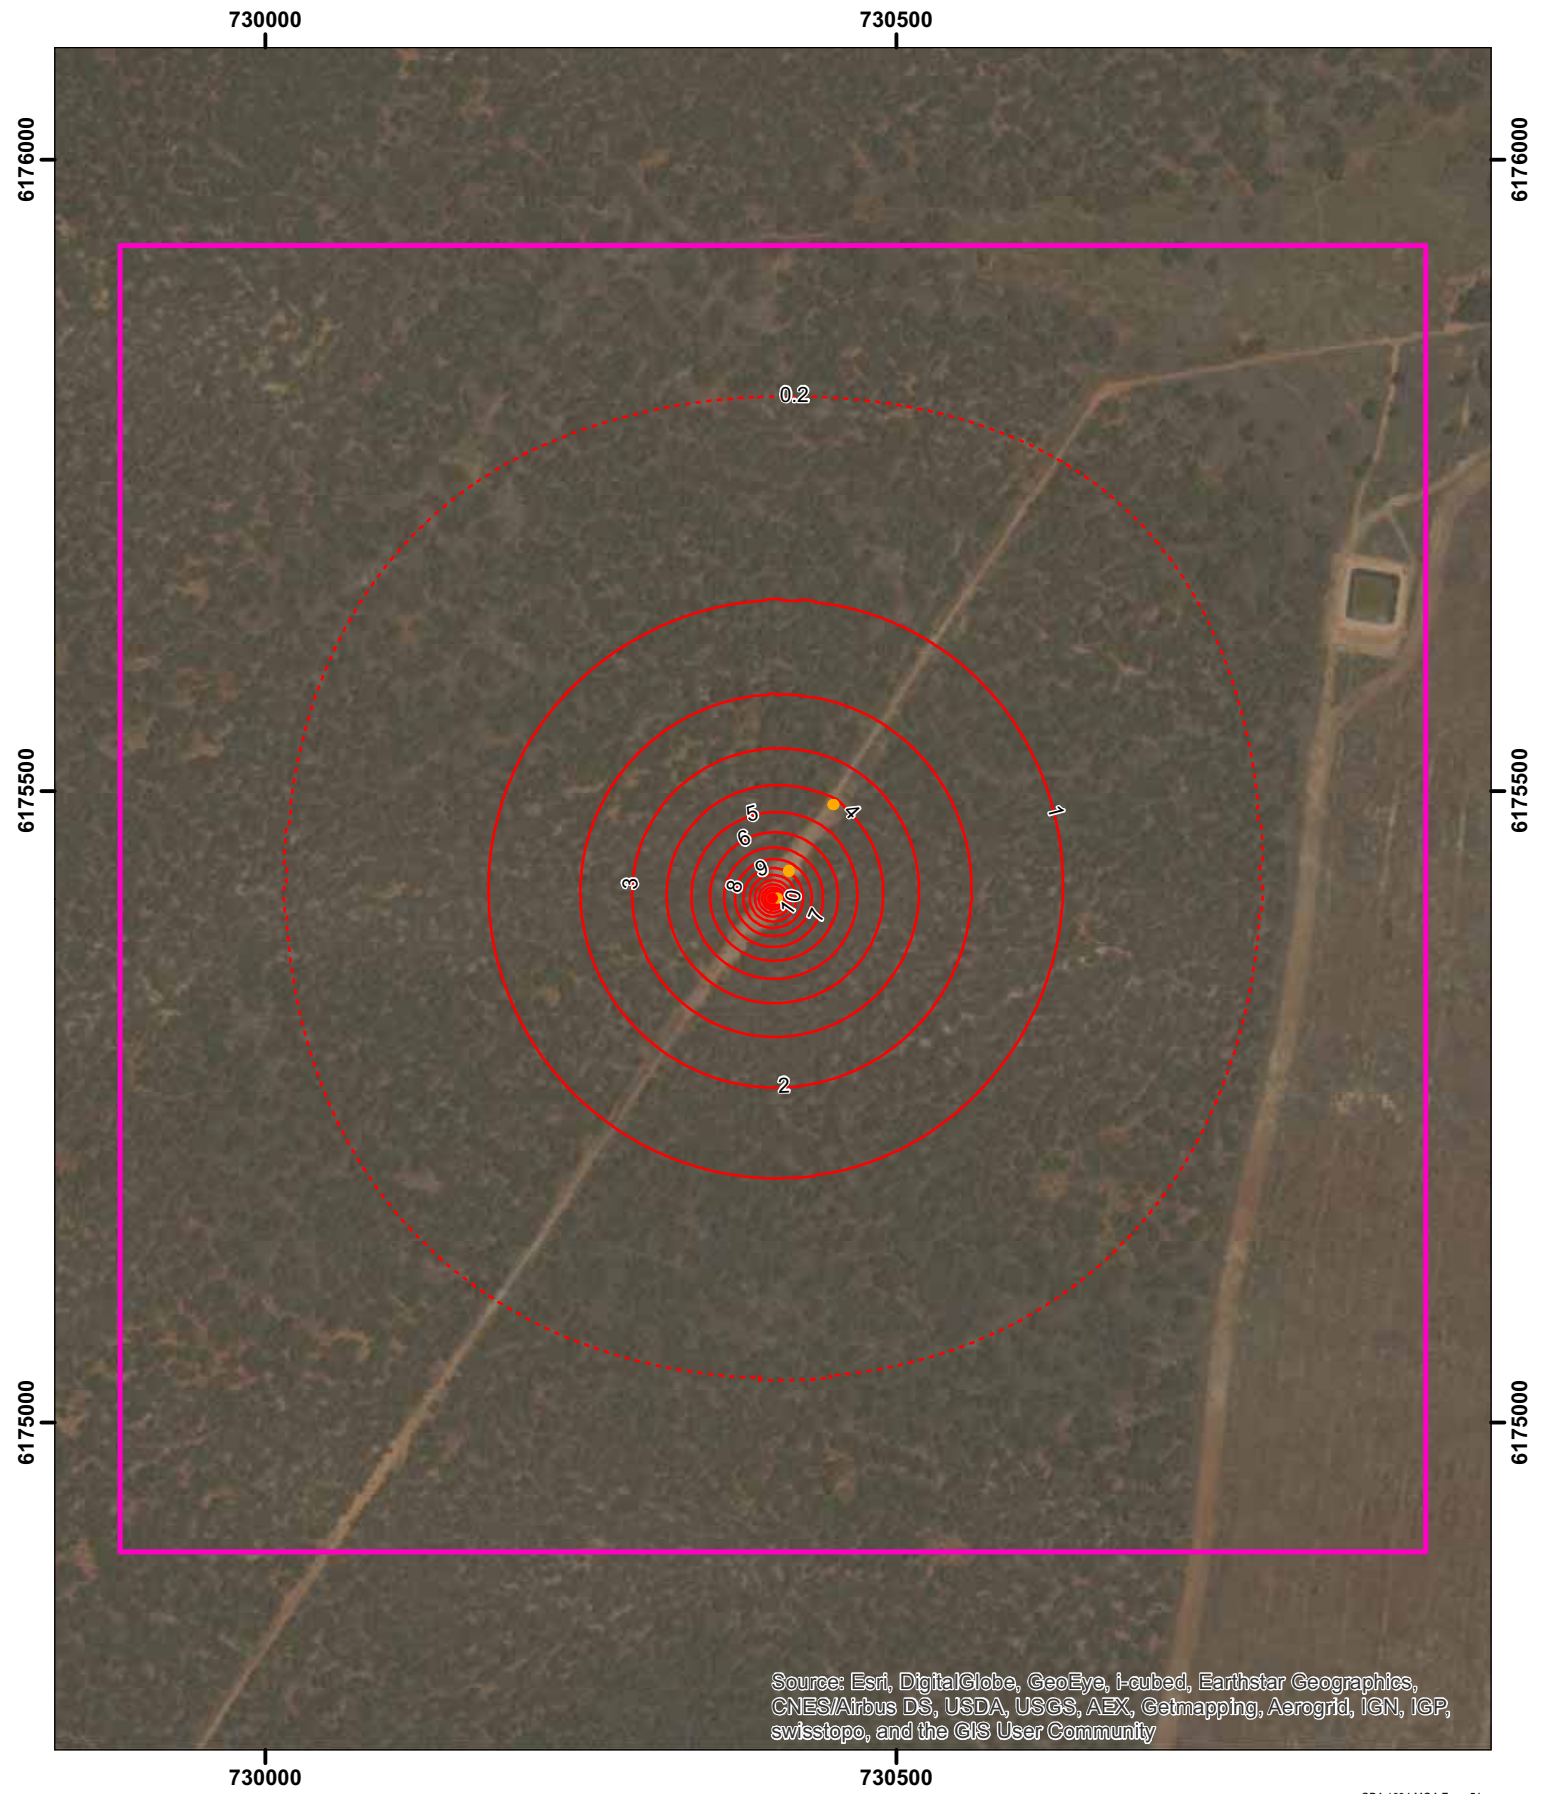


GDA 1994 MGA Zone 54

- TN1 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation



TN1 1.0 modelled drawdown in LPS1 LS/LPS2 FS on 21/02/2012



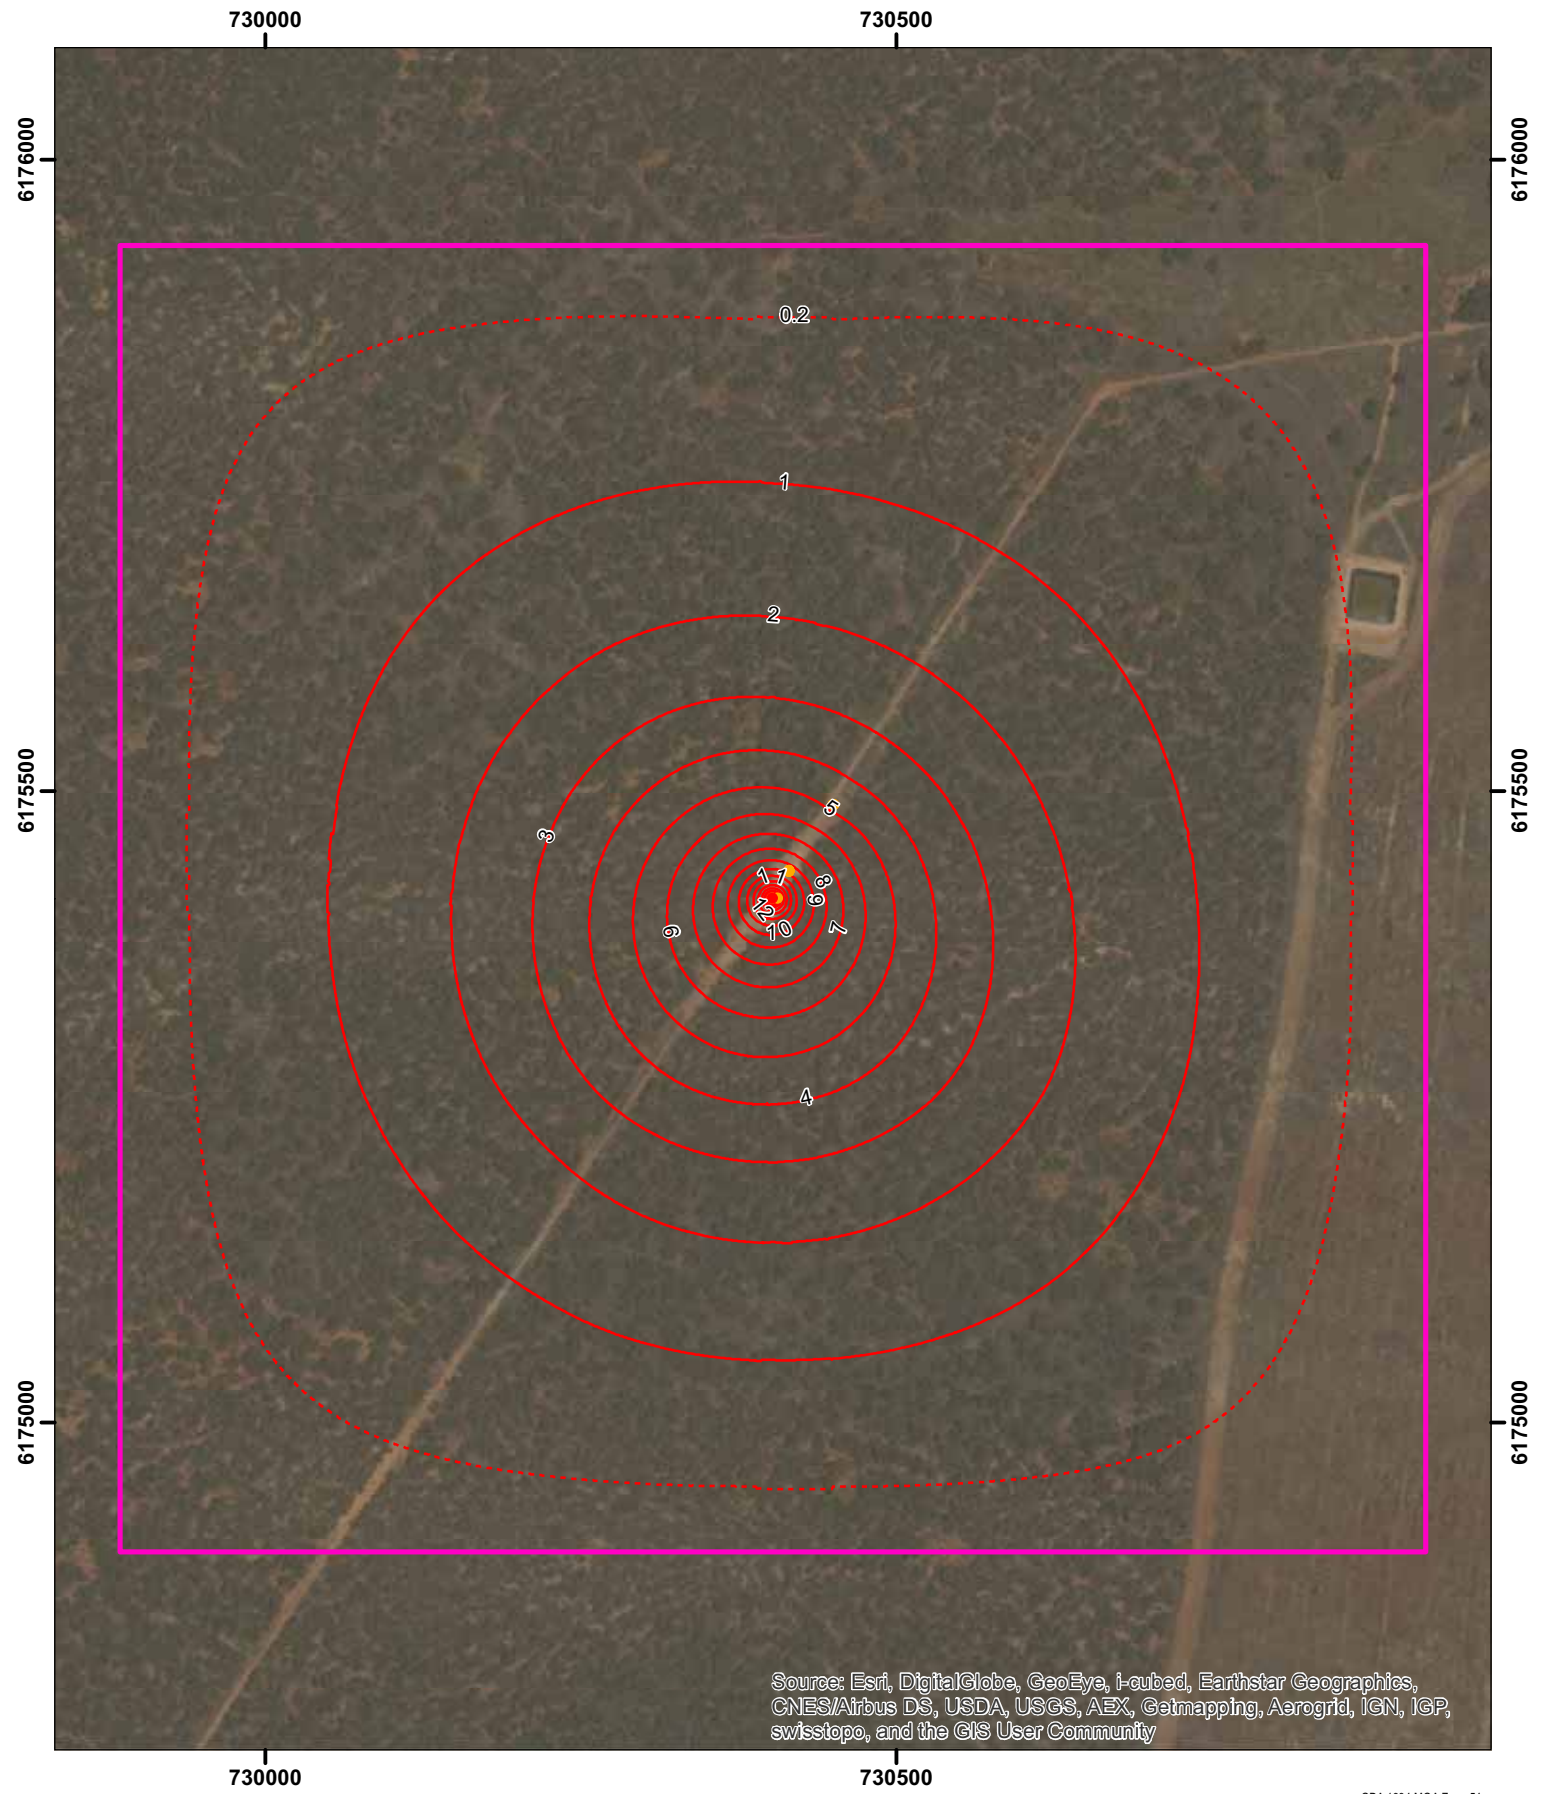


GDA 1994 MGA Zone 54

- TN1 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation



TN1 1.0 modelled drawdown in LPS2 SZ on 21/02/2012



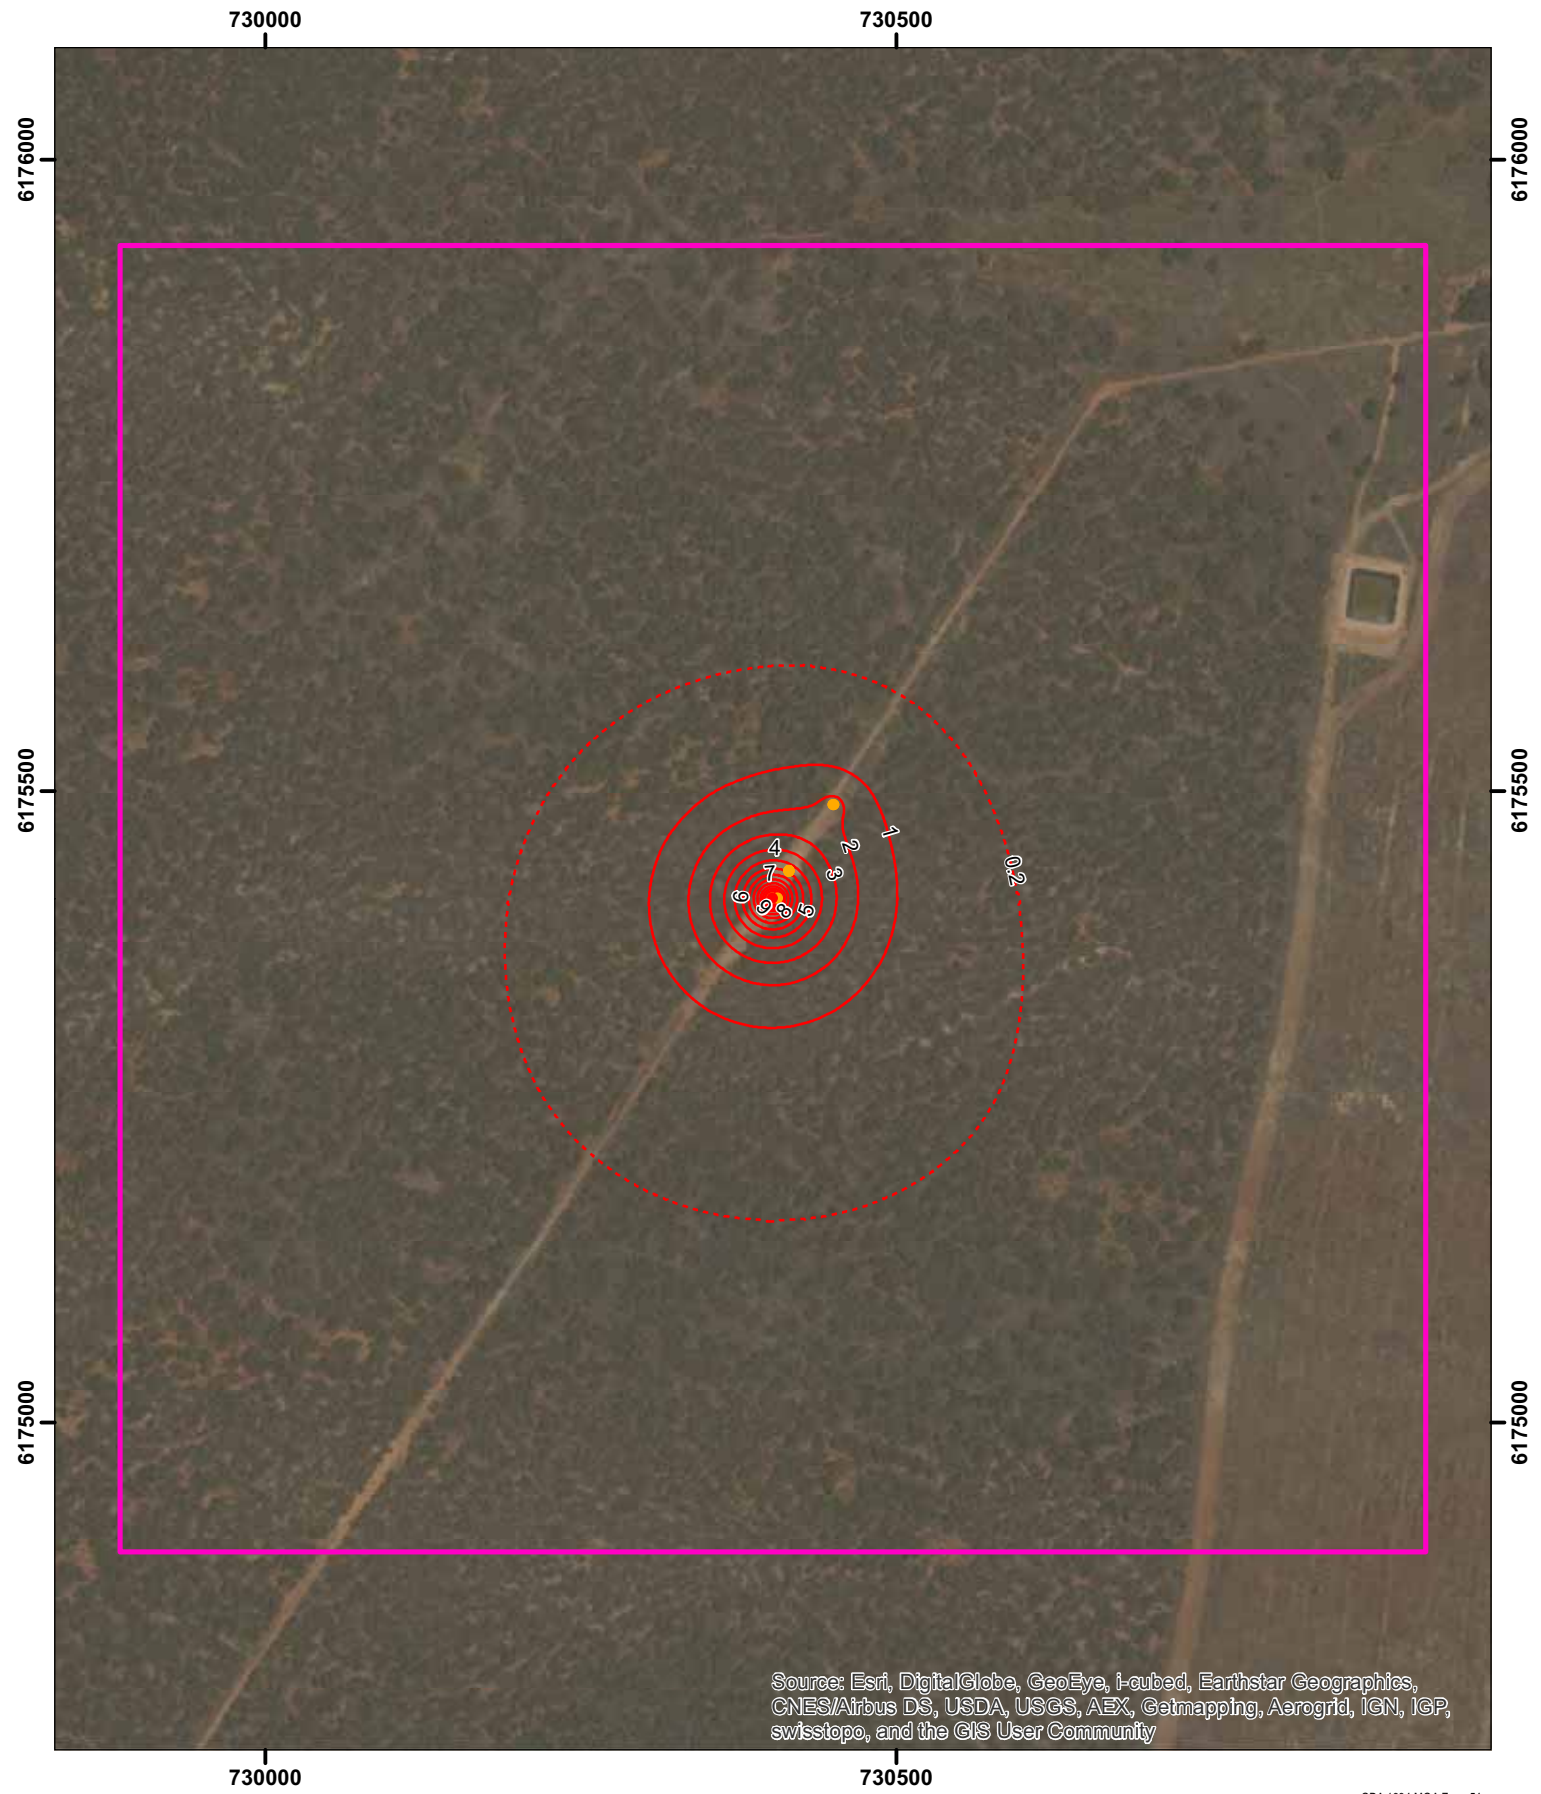


GDA 1994 MGA Zone 54

- TN1 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation



TN1 1.0 modelled drawdown in LPS2 LS on 21/02/2012



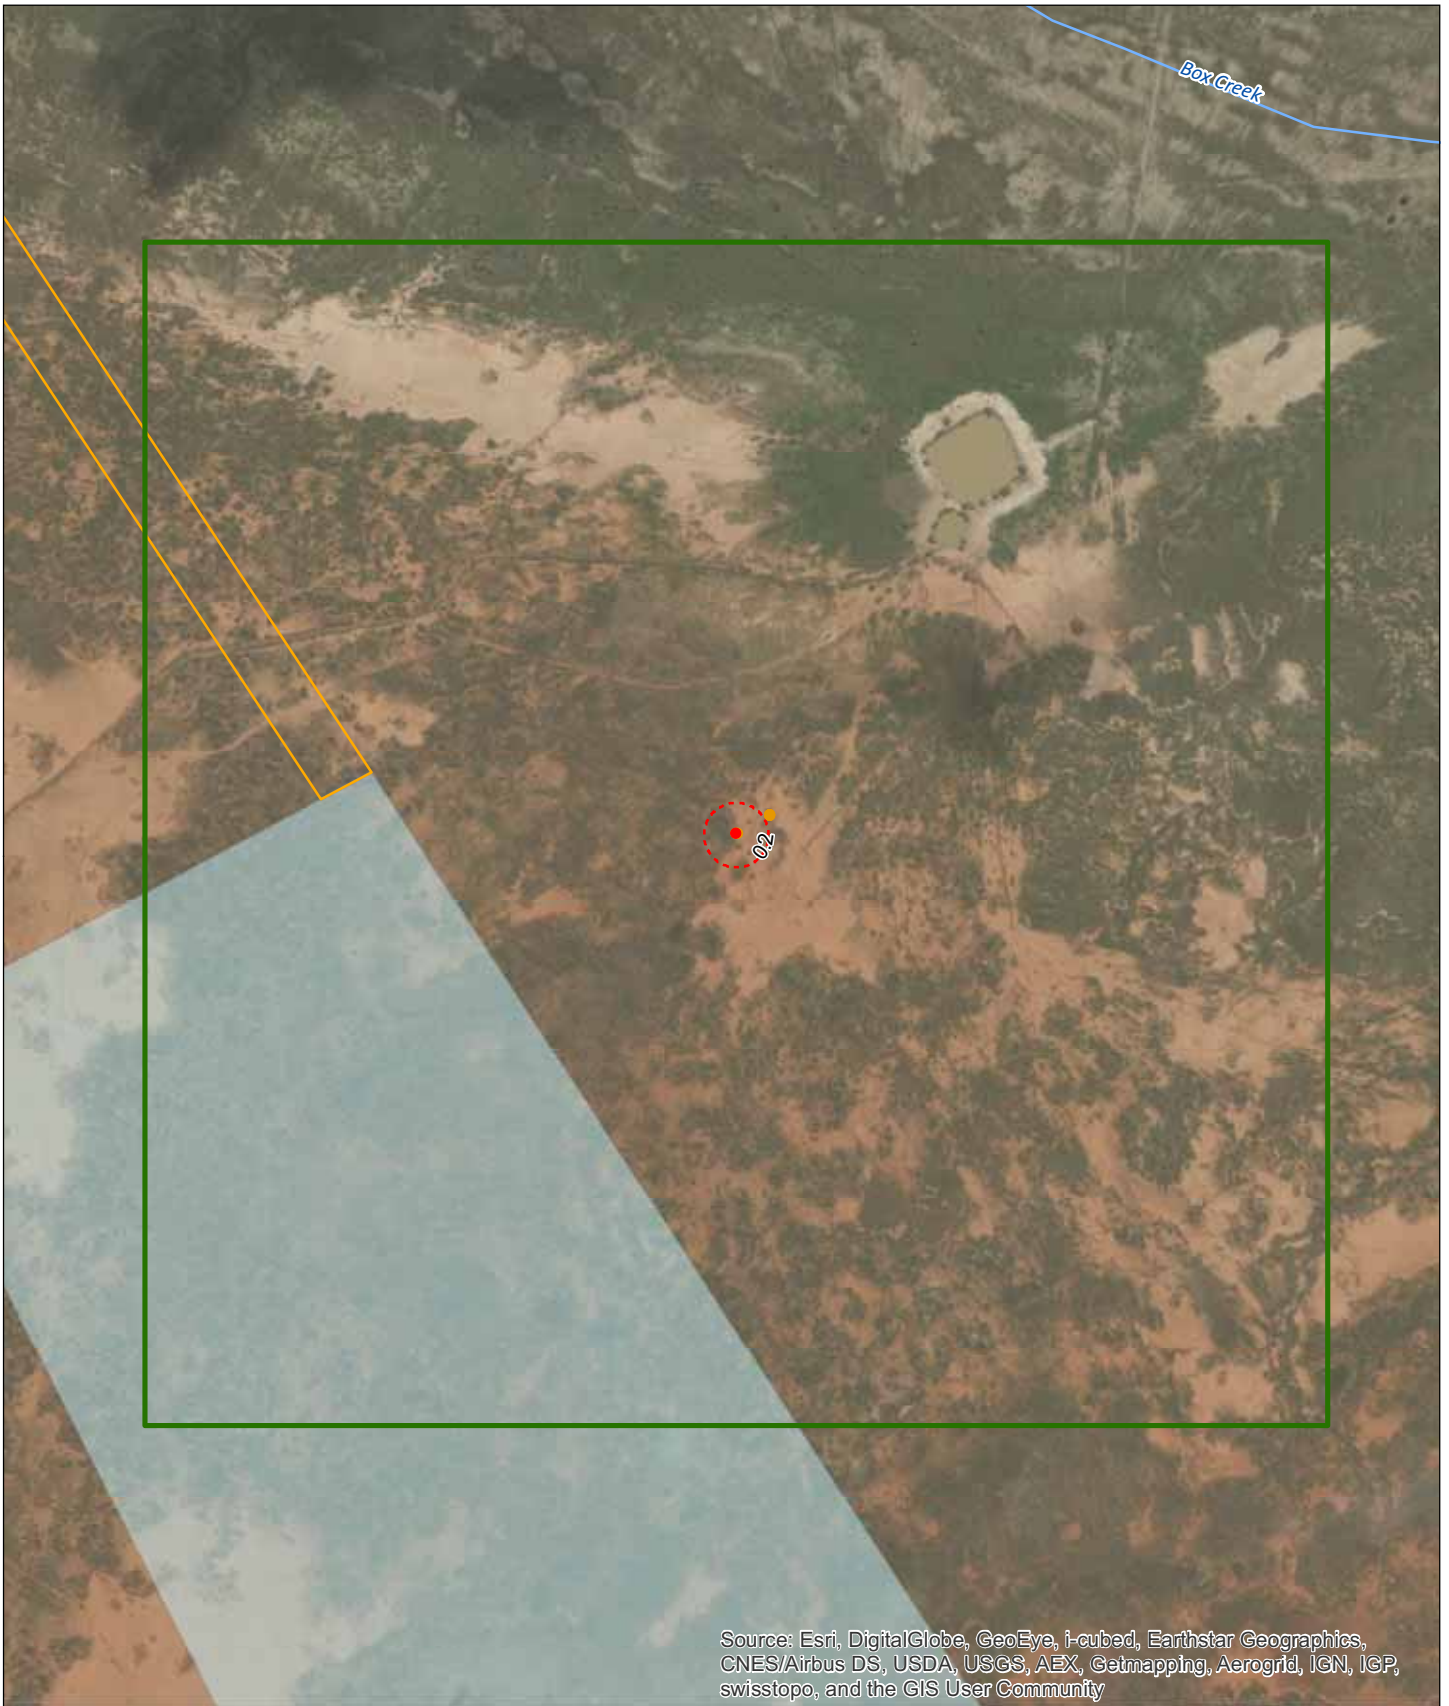


GDA 1994 MGA Zone 54

- Watercourse
- Haul road
- West Balranald mine
- TN5 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation




TN5 1.0 modelled drawdown in Shepparton Formation (deep) on 17/10/2011



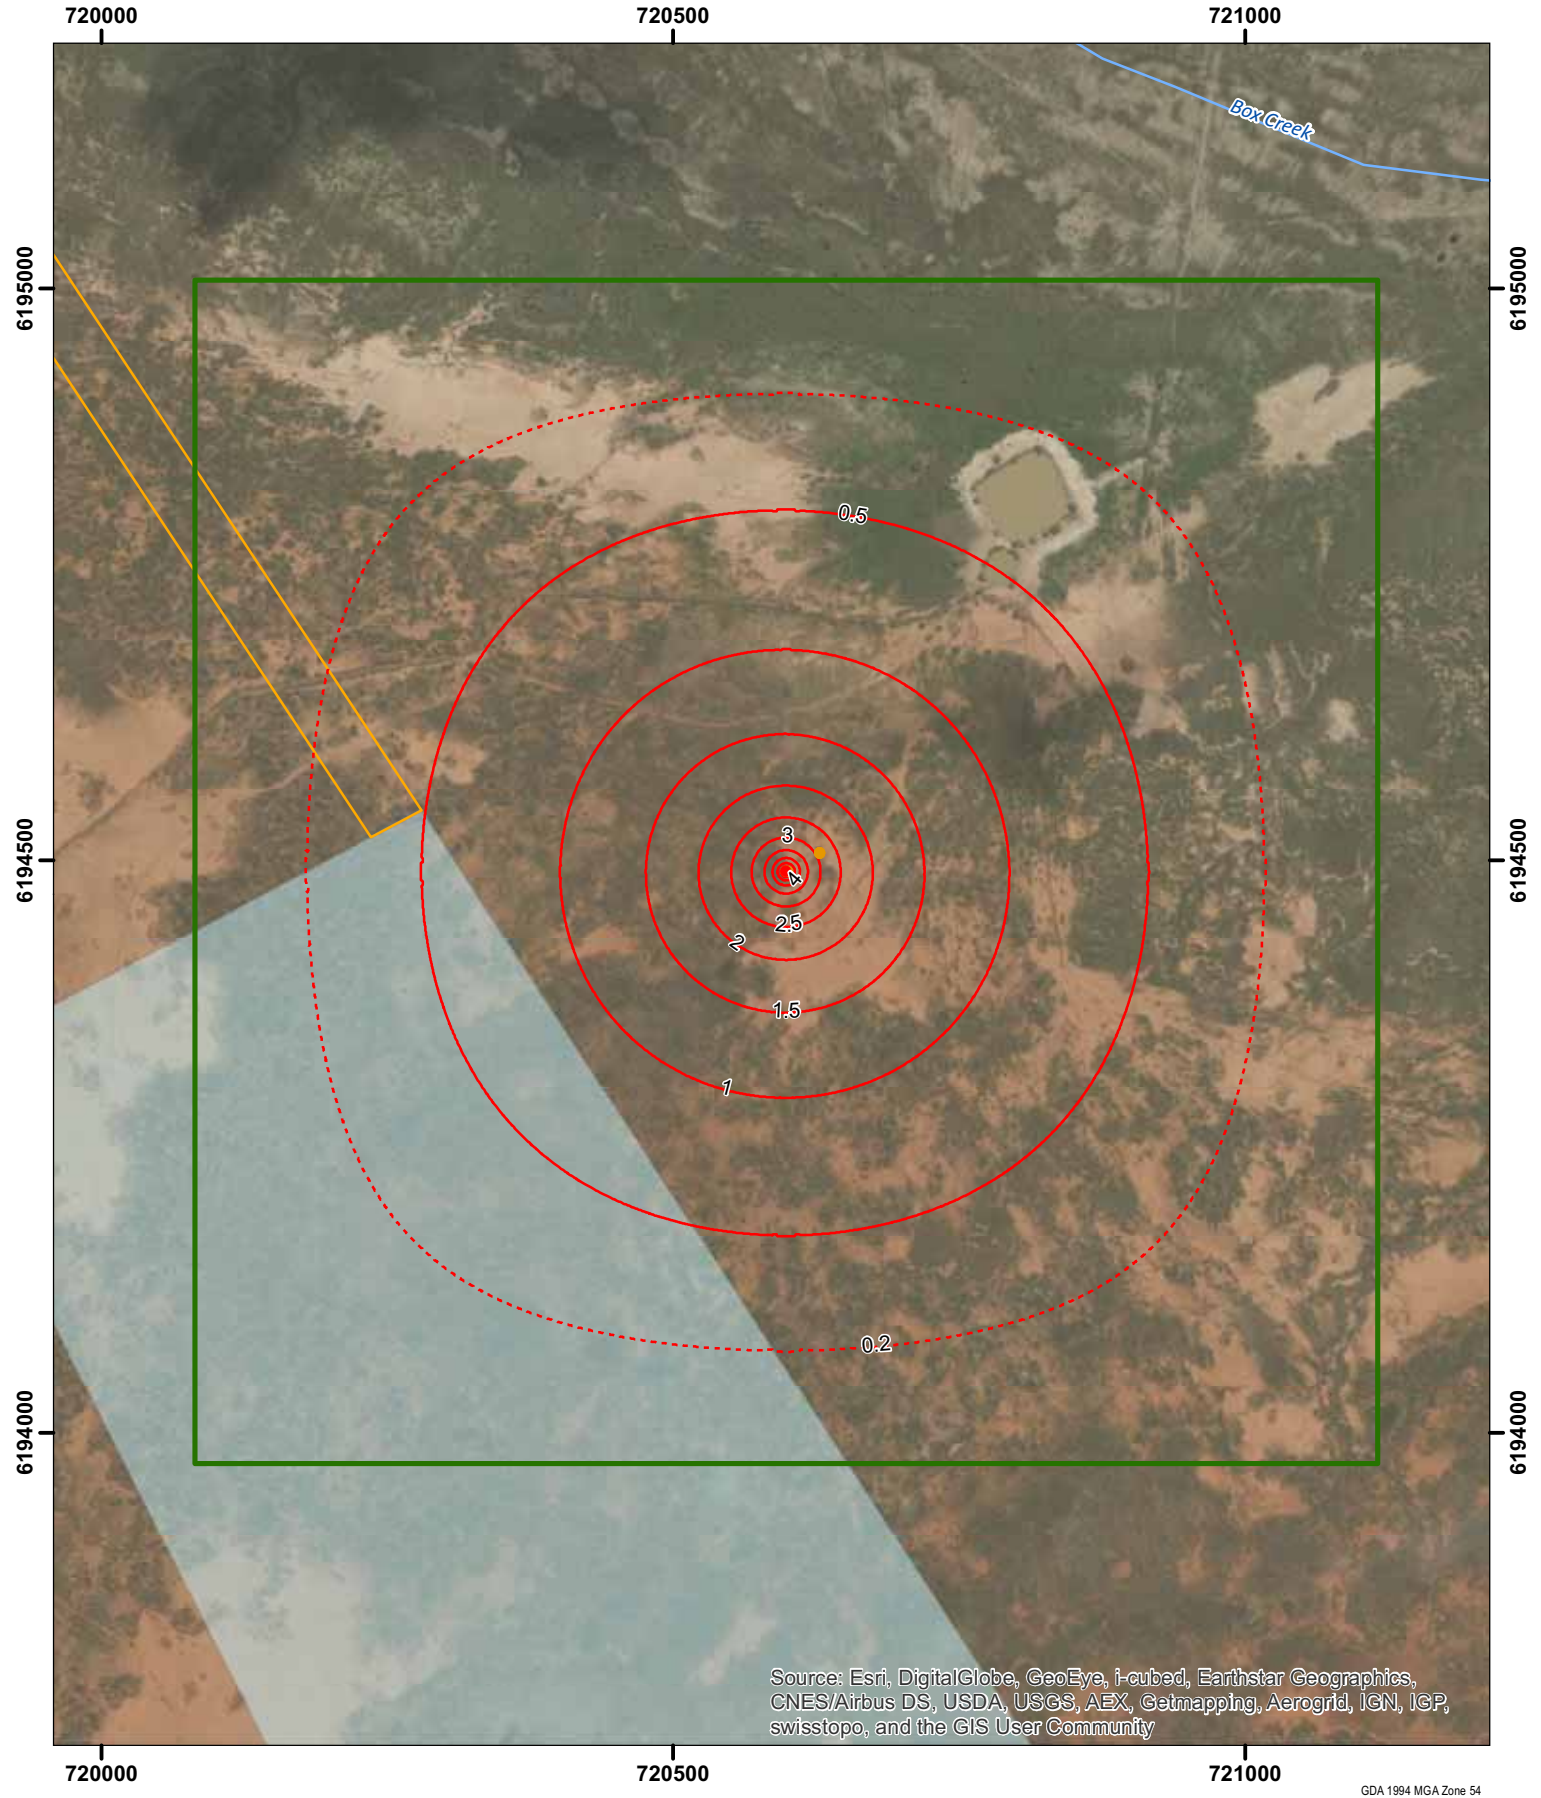


- Watercourse
- Haul road
- West Balranald mine
- TN5 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation




TN5 1.0 modelled drawdown in LPS1 FS on 17/10/2011



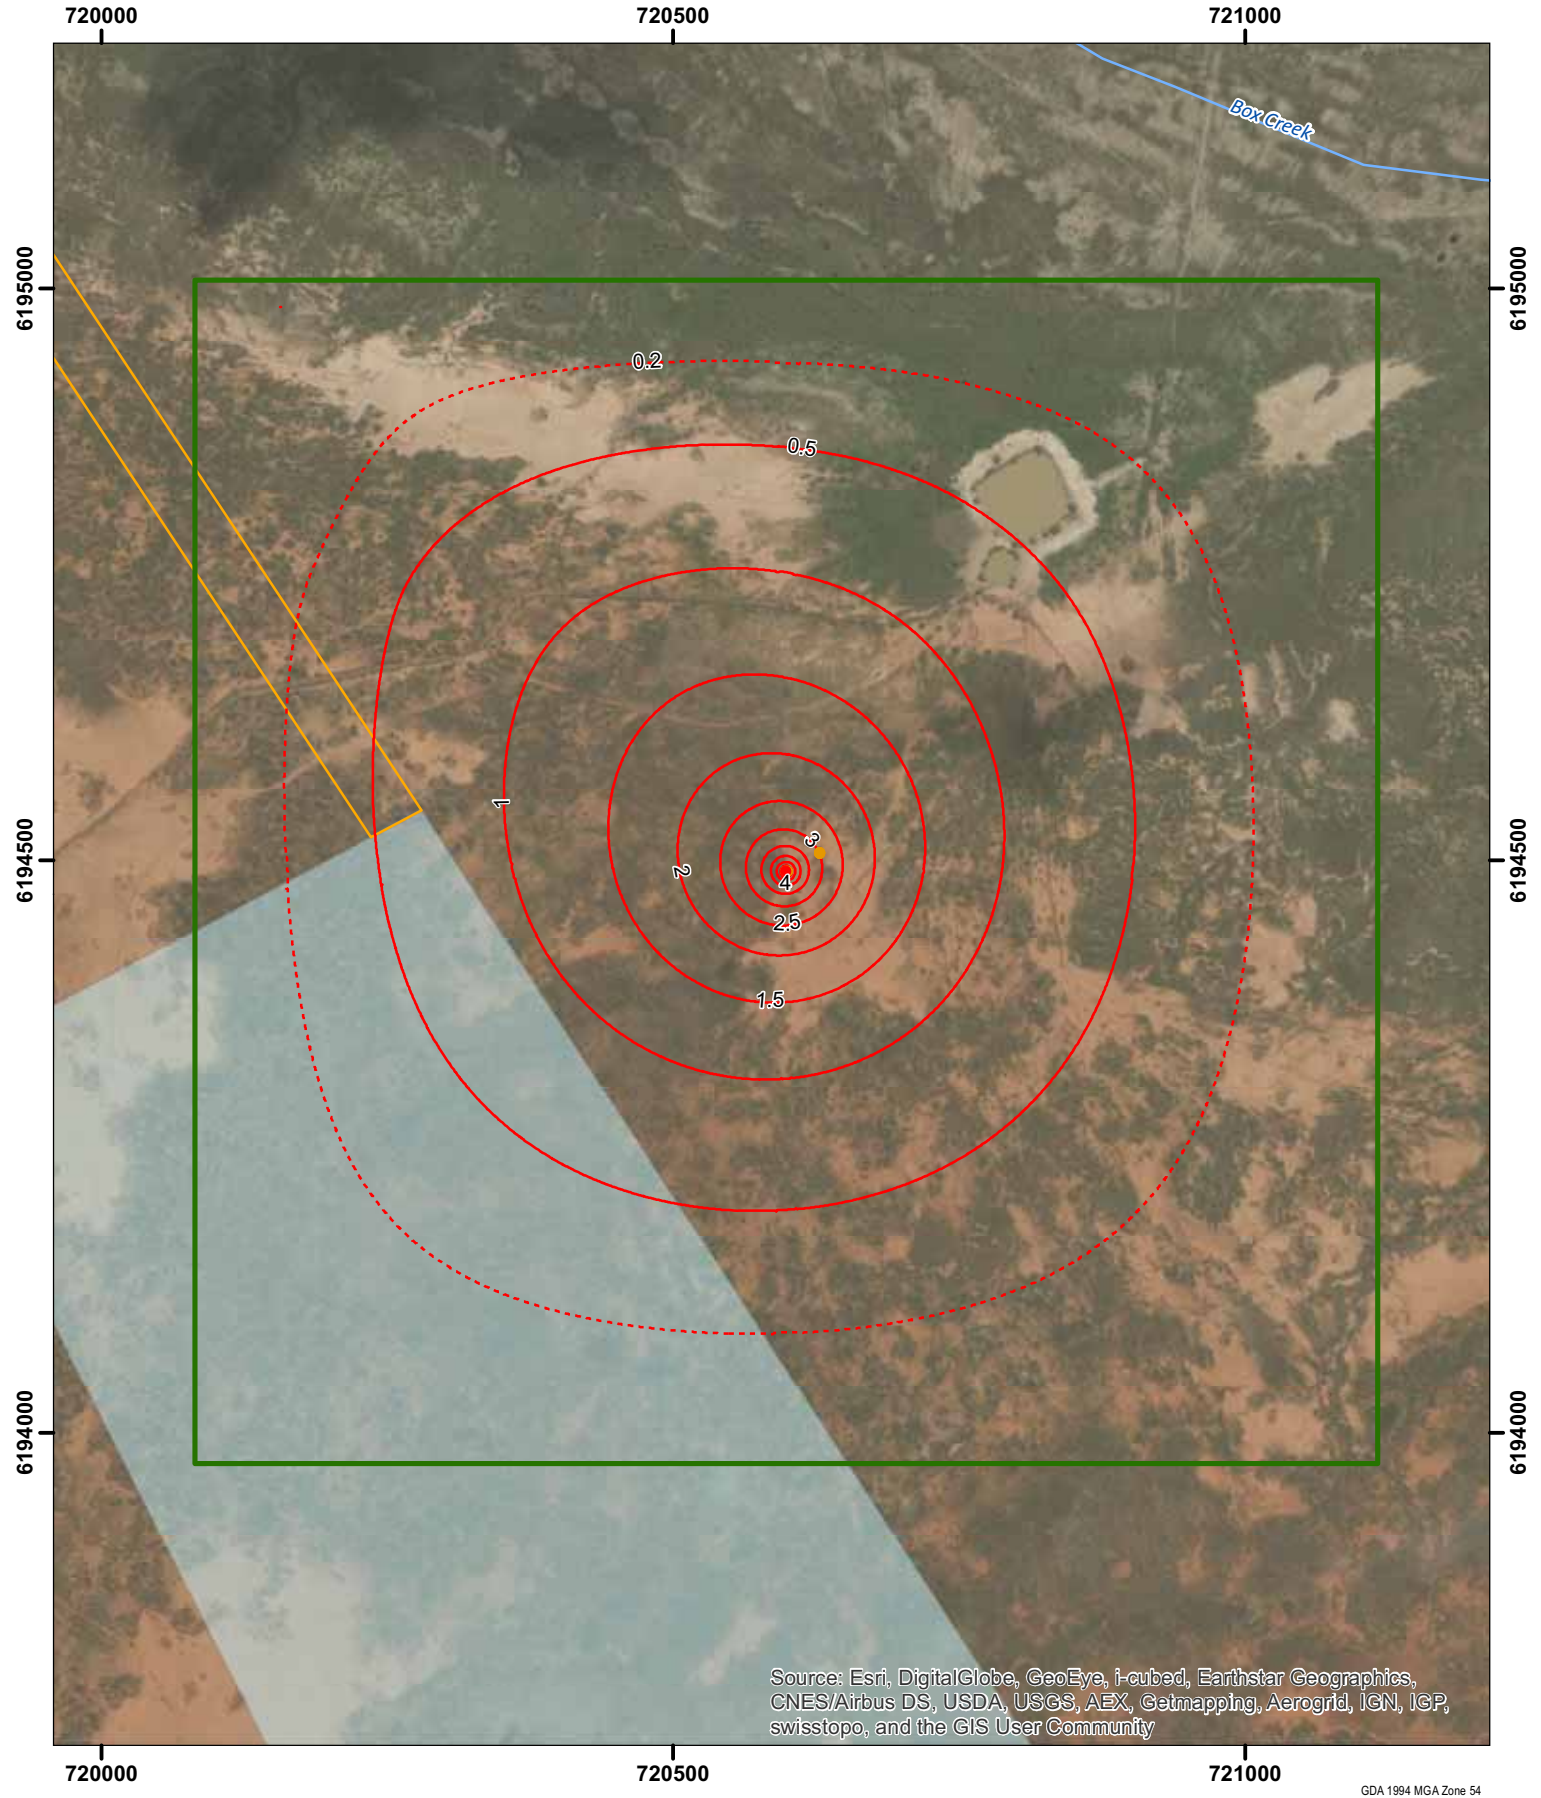


- Watercourse
- Haul road
- West Balranald mine
- TN5 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation




TN5 1.0 modelled drawdown in LPS1 SZ on 17/10/2011



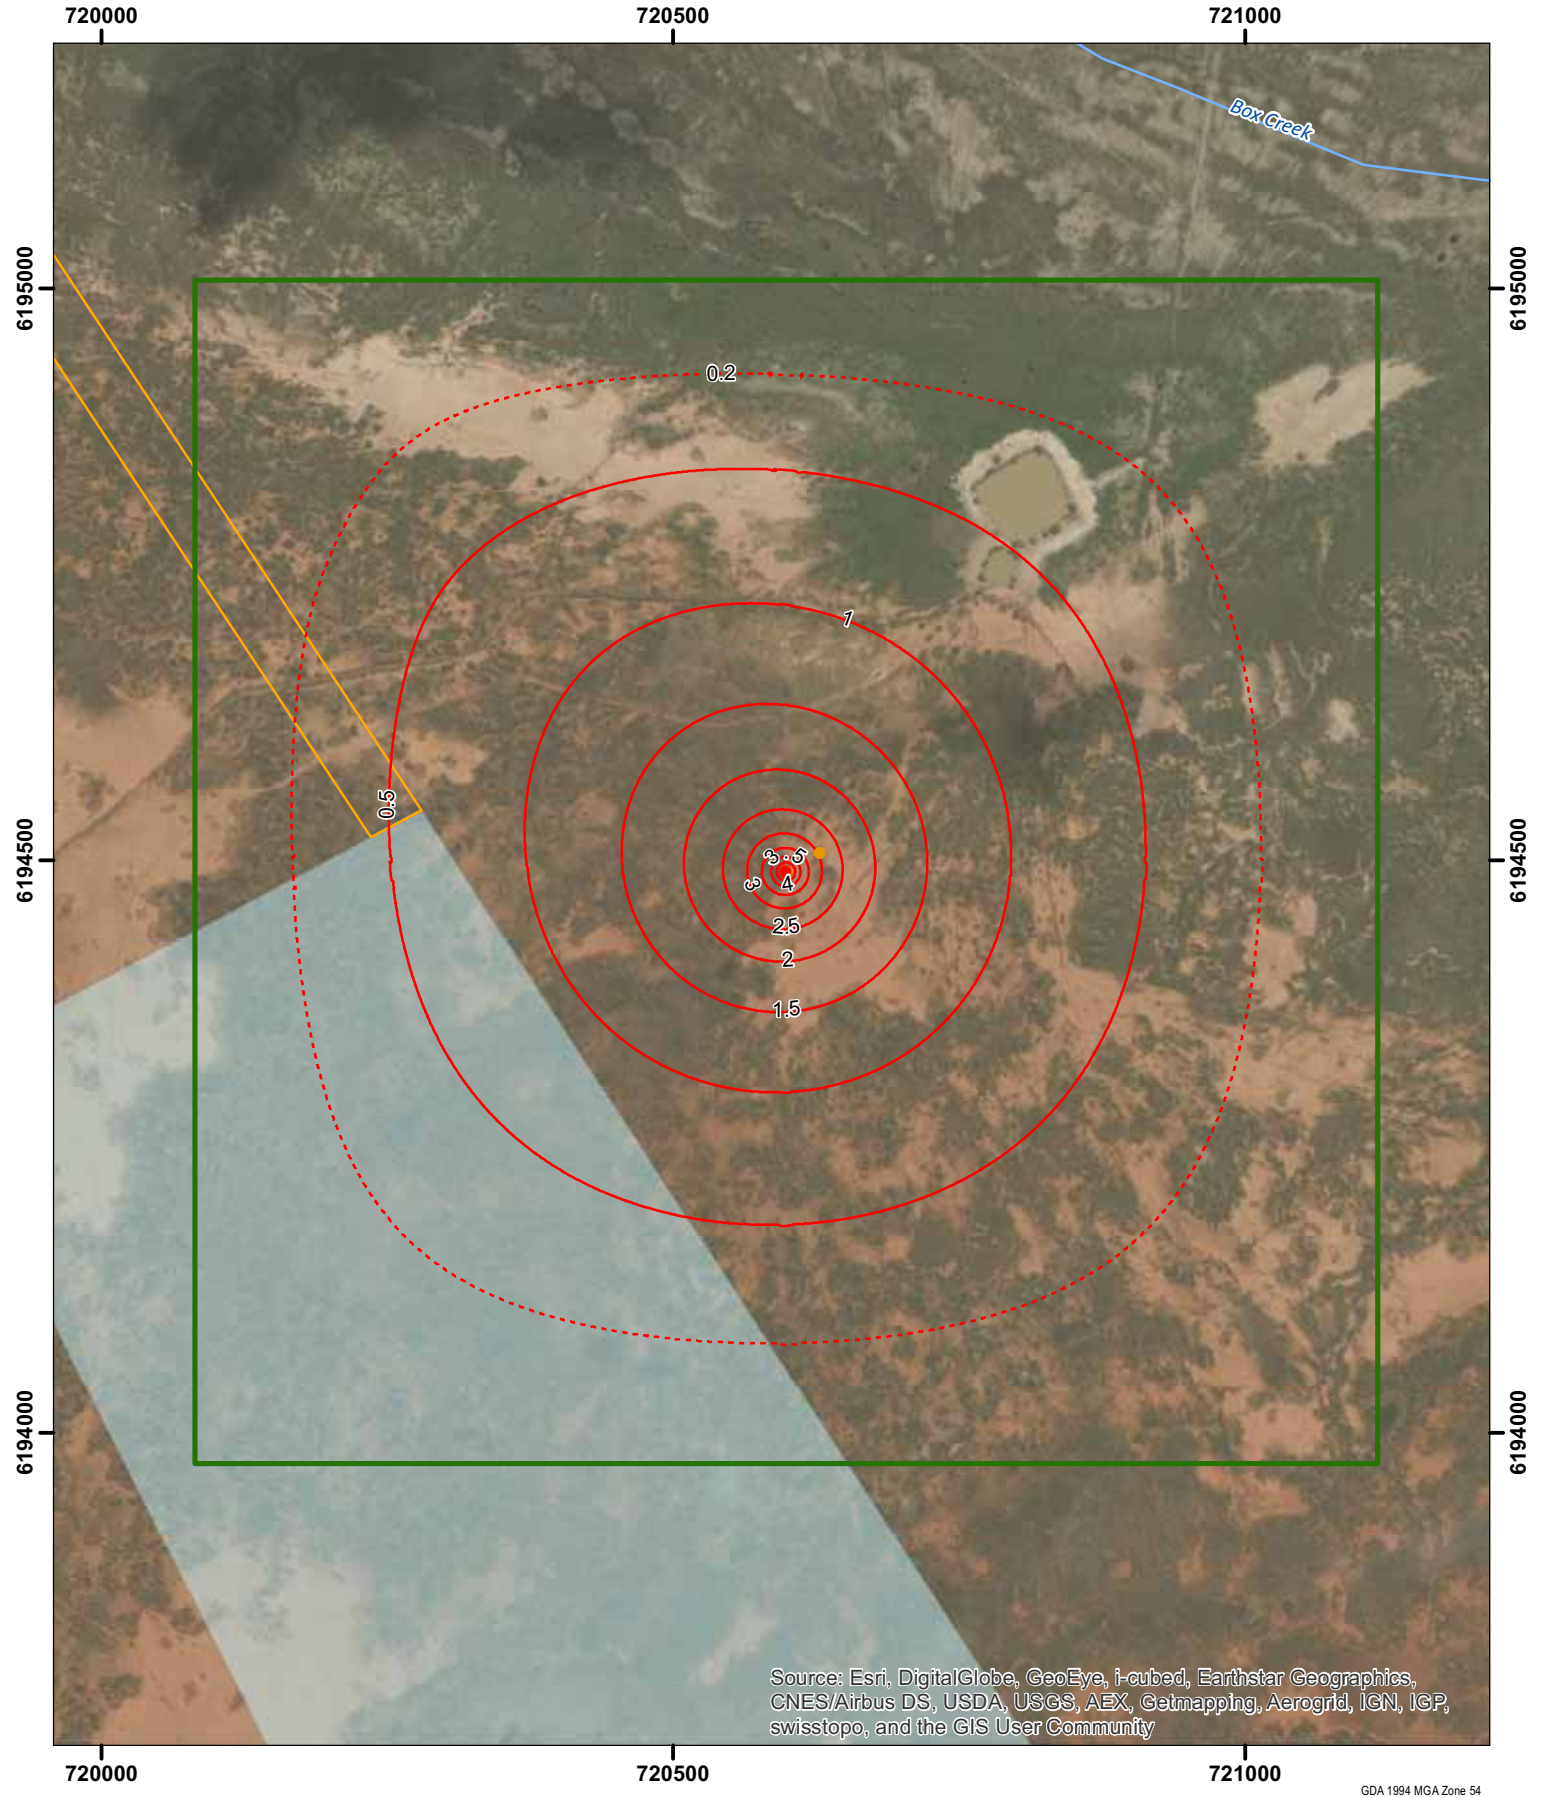


- Watercourse
- Haul road
- West Balranald mine
- TN5 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation

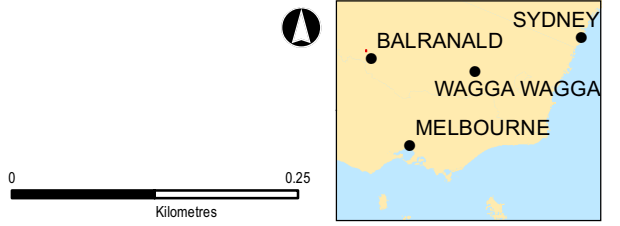


TN5 1.0 modelled drawdown in LPS1 LS/LPS2 FS on 17/10/2011



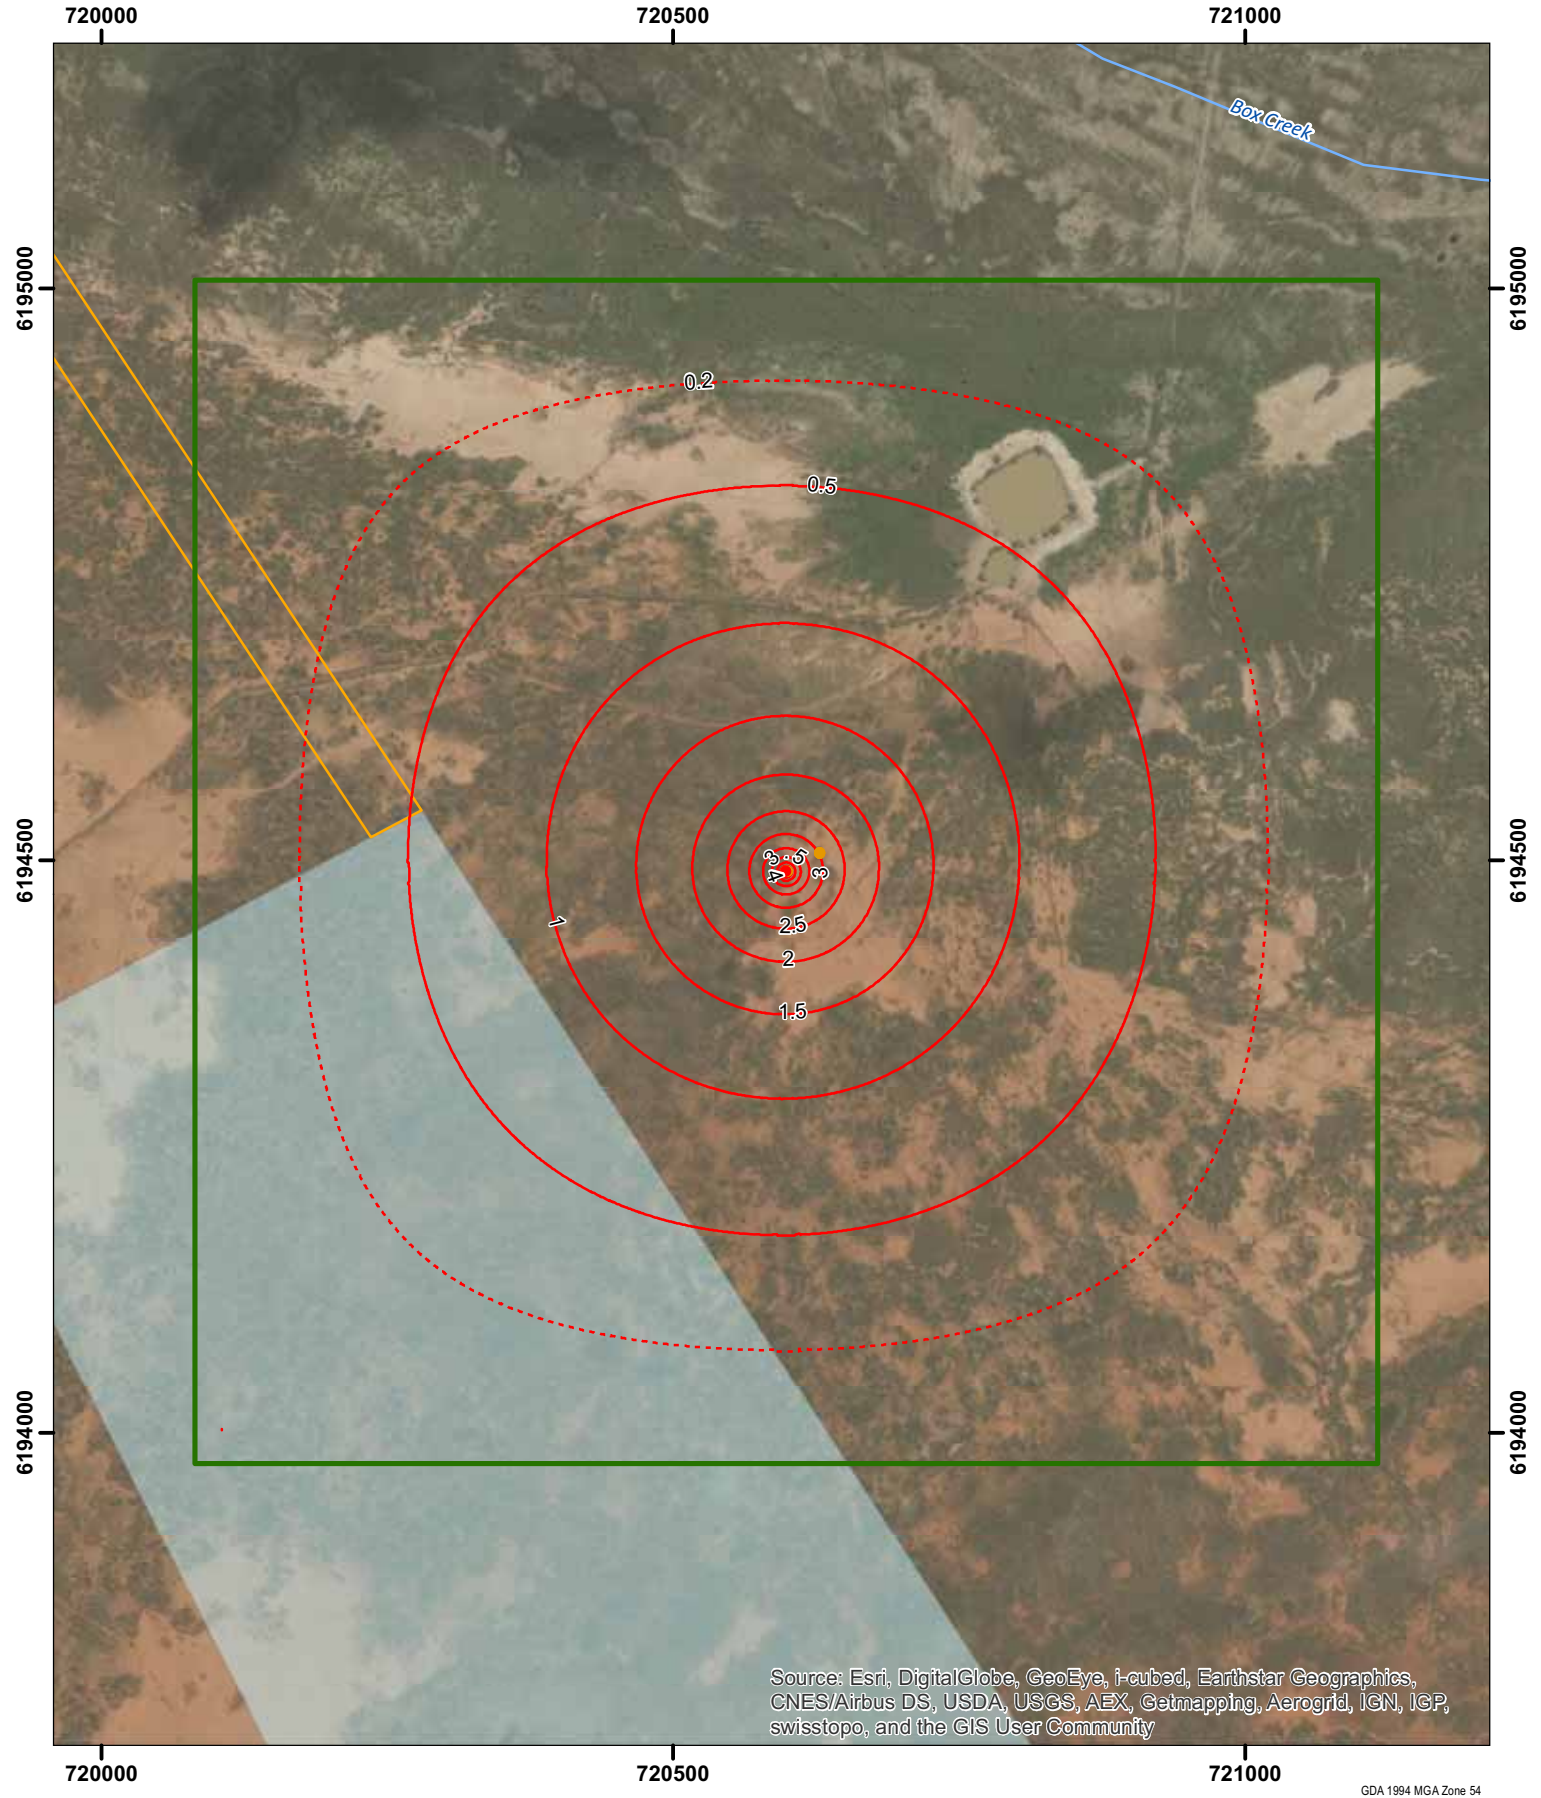


- Watercourse
- Haul road
- West Balranald mine
- TN5 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation

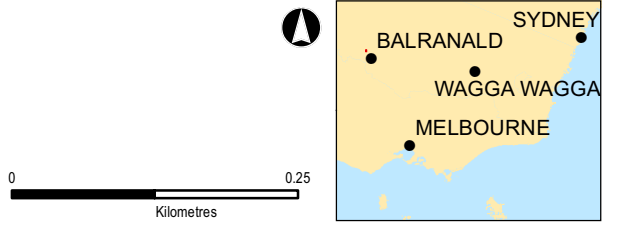


TN5 1.0 modelled drawdown in LPS2 SZ on 17/10/2011



L:\VESAI\Projects\WE23875\Technical\Spatial\mxd\Transient Calibration figures\Rev2\TN5\6 TN5 Drawdown in the LPS2 SZ.mxd

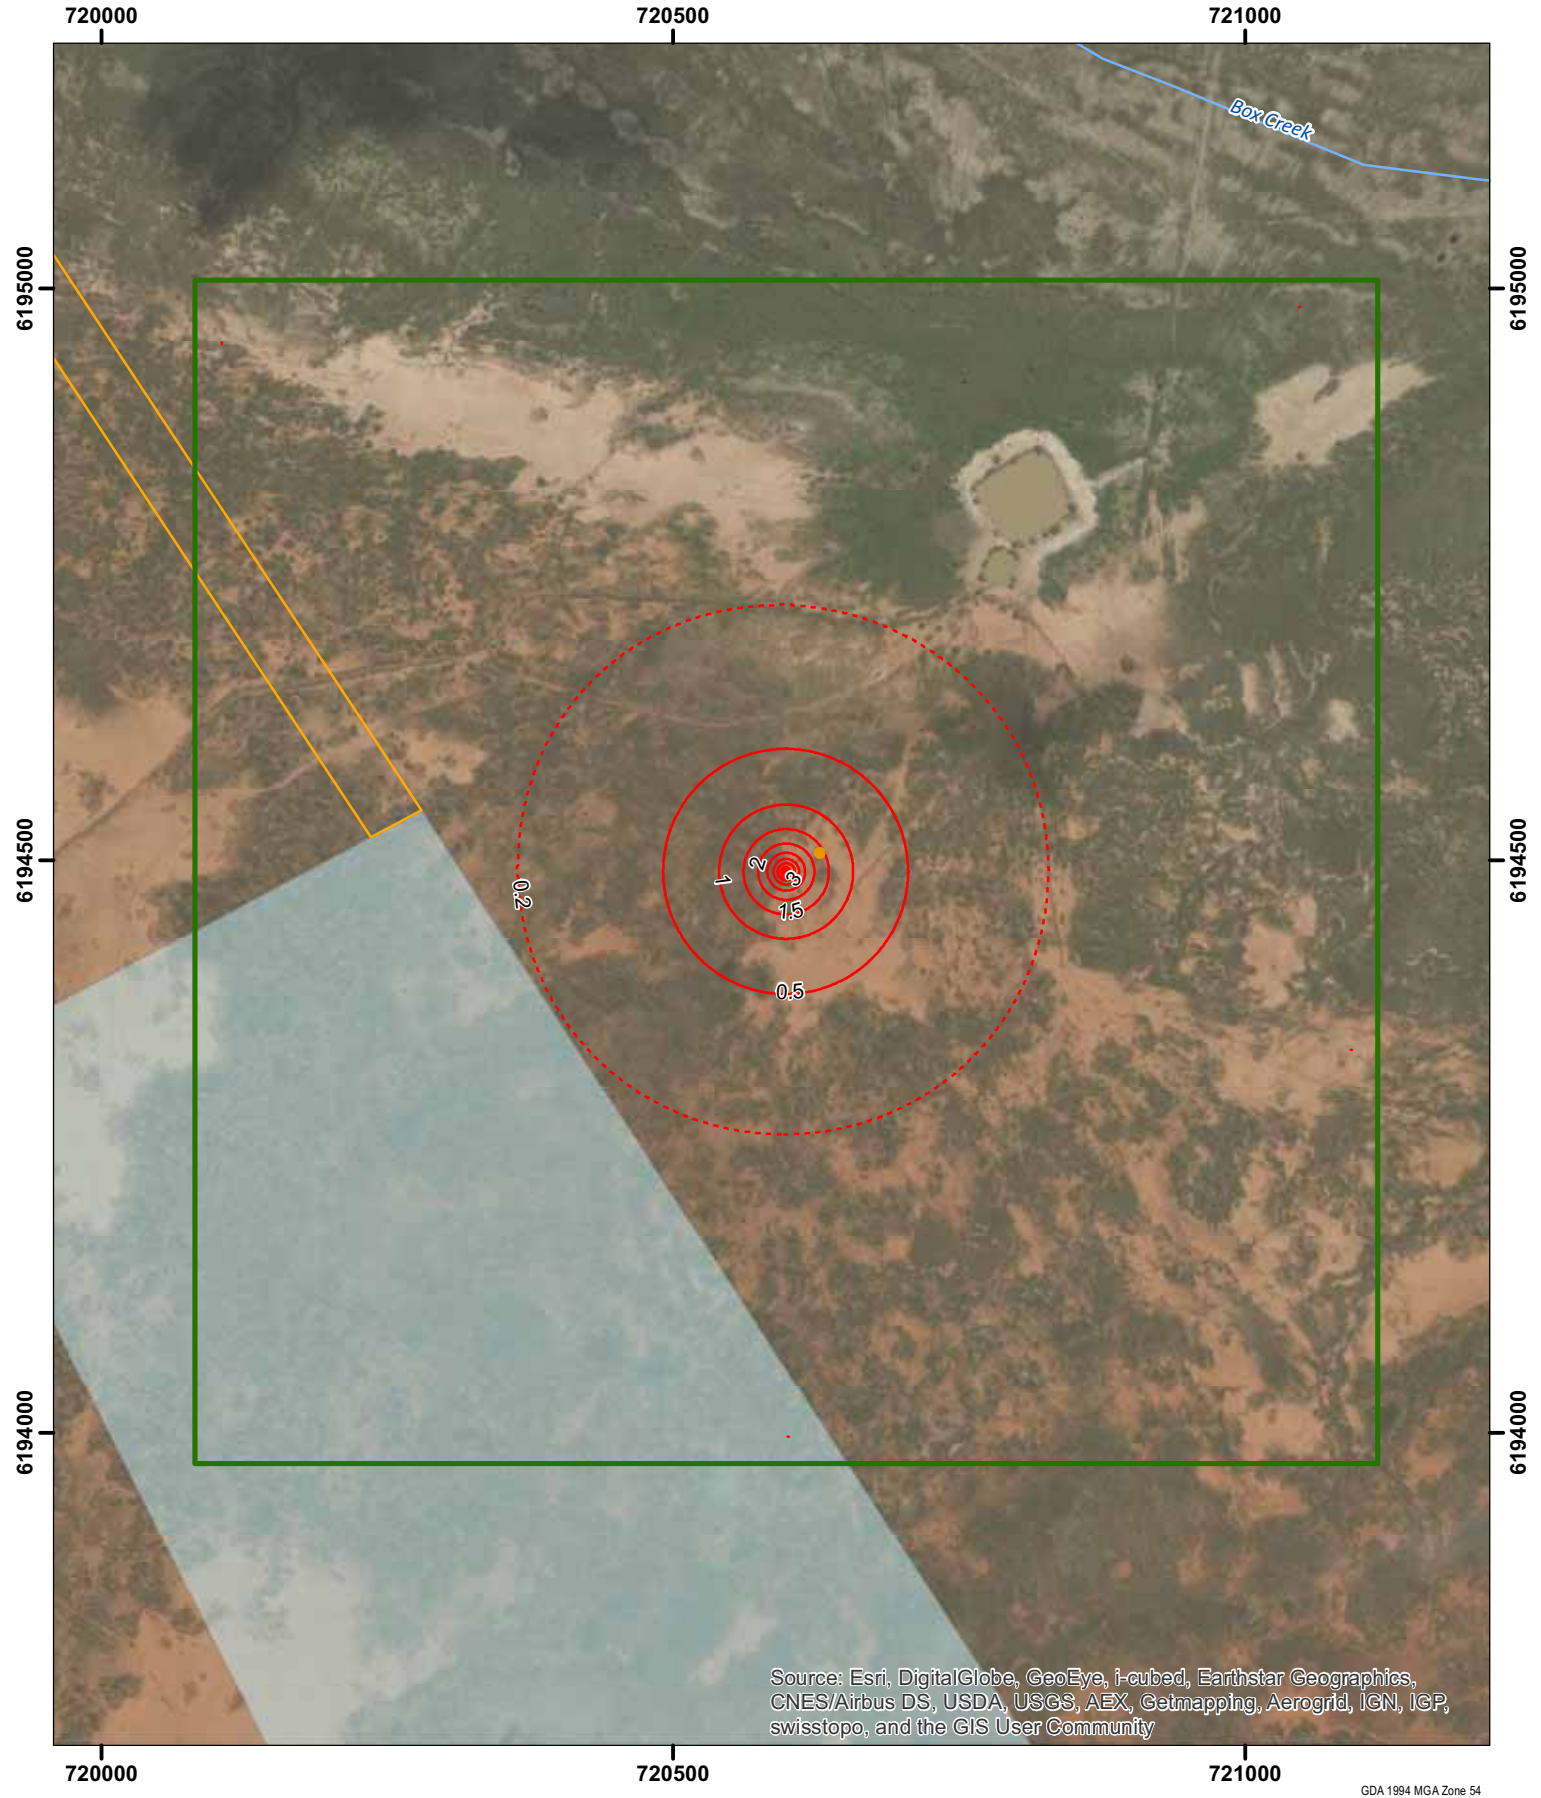

- Watercourse
- Haul road
- West Balranald mine
- TN5 1.0 model domain
- Modelled drawdown (m)
- Production
- Observation



TN5 1.0 modelled drawdown in LPS2 LS on 17/10/2011



717000

718000

719000

6200000

6200000

6199000

6199000

6198000

6198000

717000

718000

719000

GDA 1994 MGA Zone 54


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

-  Haul road
-  NANDA 1.0 model domain
-  Injection
-  Production
-  Observation
-  Modelled drawdown (m)
-  Modelled mounding (m)



Nanda1.0 modelled drawdown in LPS1 FS on 01/09/2014



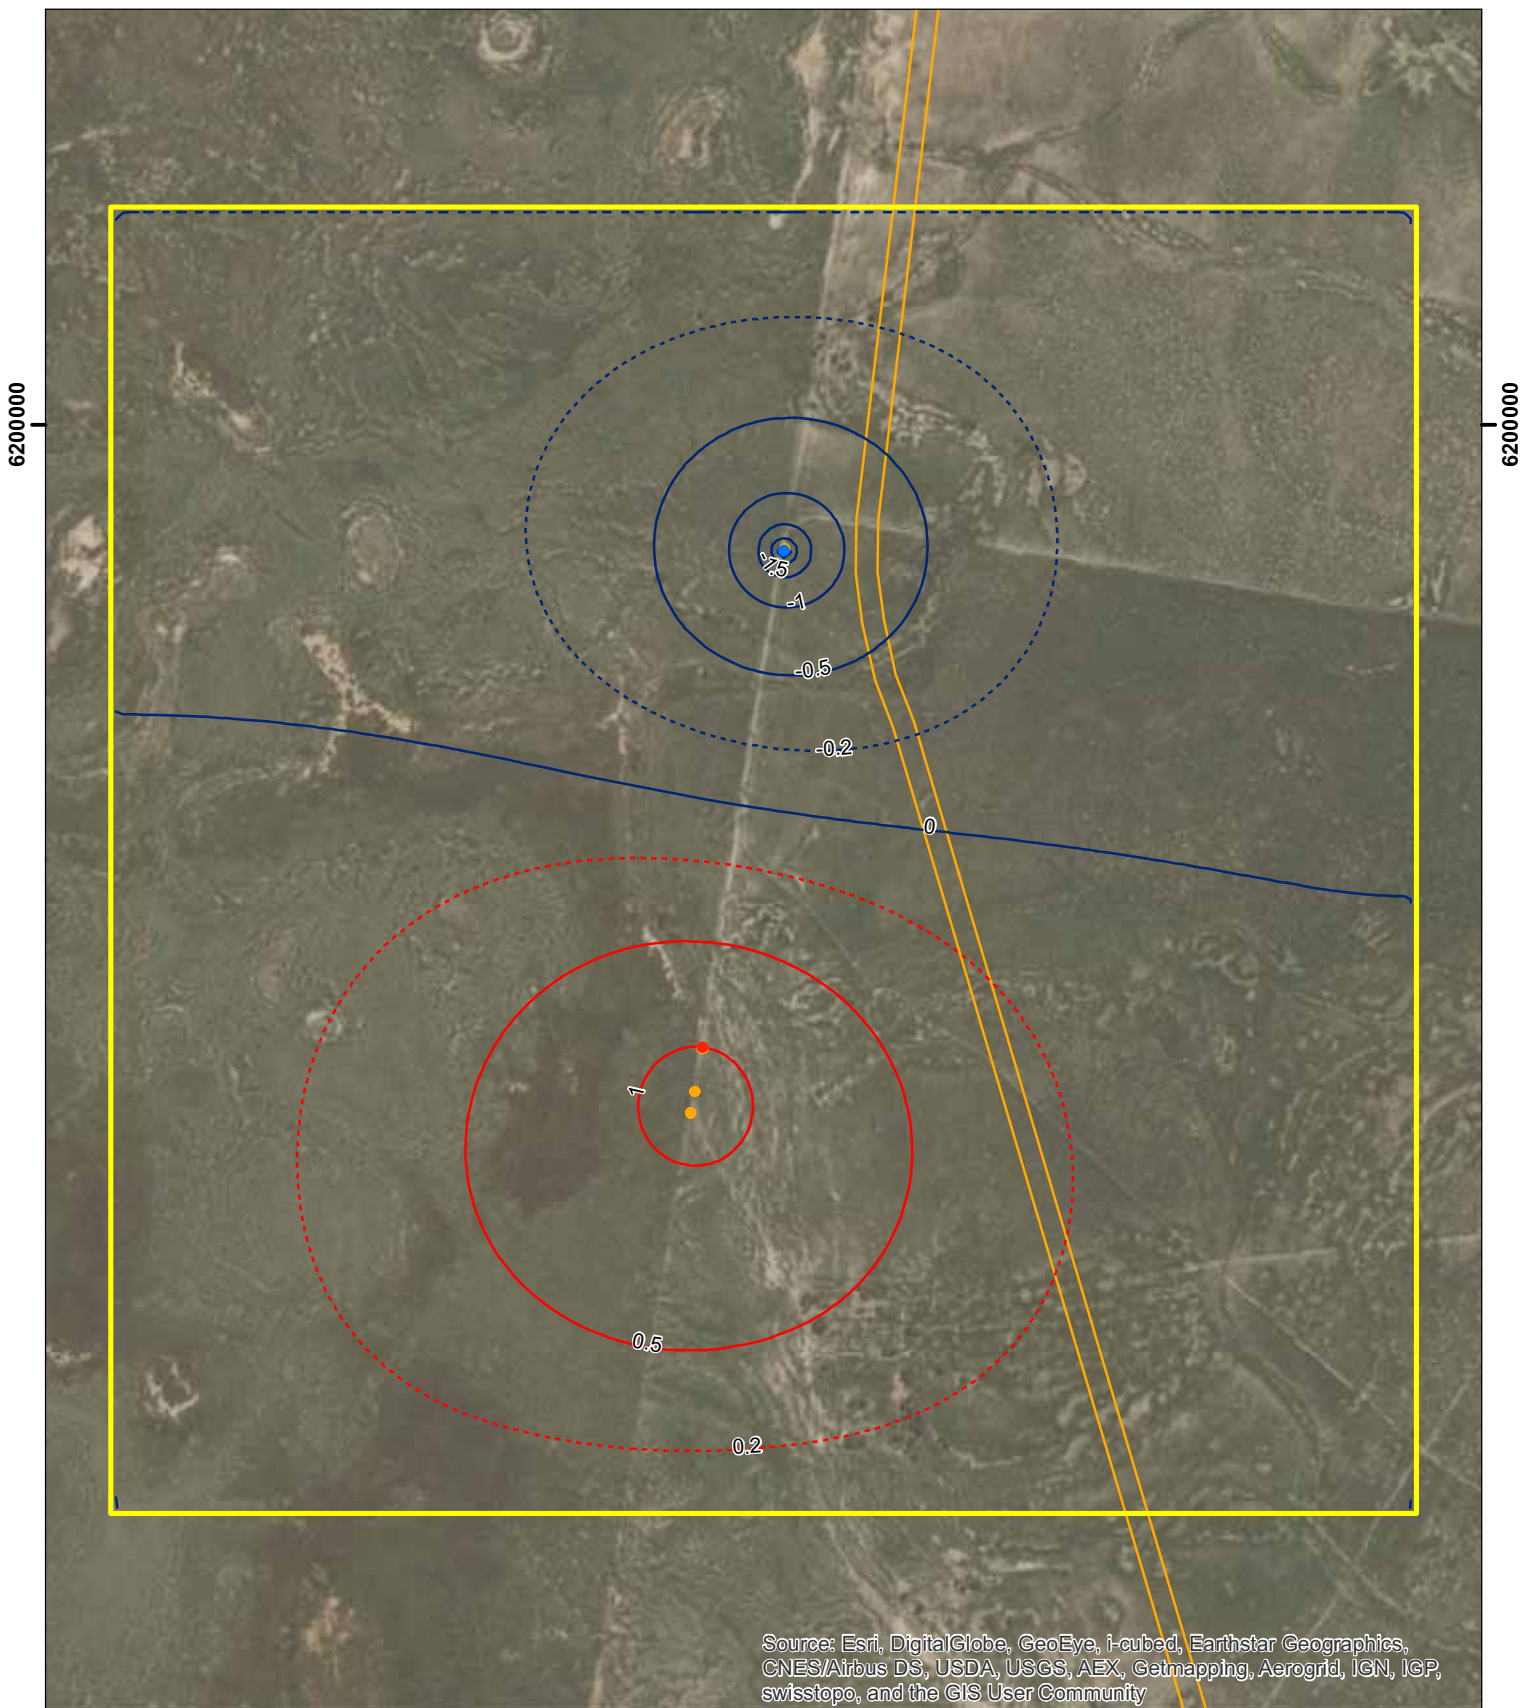

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Haul road
- NANDA 1.0 model domain
- Injection
- Production
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



Nanda1.0 modelled drawdown in LPS1 SZ on 01/09/2014



I:\VESA\Projects\VE23875\Technical\Spatial\mxd\Transient Calibration figures\Rev1 and\4 NANDA Drawdown in the LPS1 SZ wells.mxd

717000

718000

719000

6200000

6200000

6199000

6199000

6198000

6198000

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

-  Haul road
-  NANDA 1.0 model domain
-  Injection
-  Production
-  Observation
-  Modelled mounding (m)
-  Modelled drawdown (m)



Nanda1.0 modelled drawdown in LPS1 LS/LPS2 FS on 01/09/2014



717000

718000

719000

6200000

6200000

6199000

6199000

6198000

6198000

717000

718000

719000

GDA 1994 MGA Zone 54

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

-  Haul road
-  NANDA 1.0 model domain
-  Injection
-  Production
-  Observation
-  Modelled drawdown (m)
-  Modelled mounding (m)



Nanda1.0 modelled drawdown in LPS2 SZ on 01/09/2014



717000

718000

719000

6200000

6200000

6199000

6199000

6198000

6198000

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

-  Haul road
-  NANDA 1.0 model domain
-  Injection
-  Production
-  Observation
-  Modelled drawdown (m)
-  Modelled mounding (m)



Nanda1.0 modelled drawdown in LPS2 LS on 01/09/2014



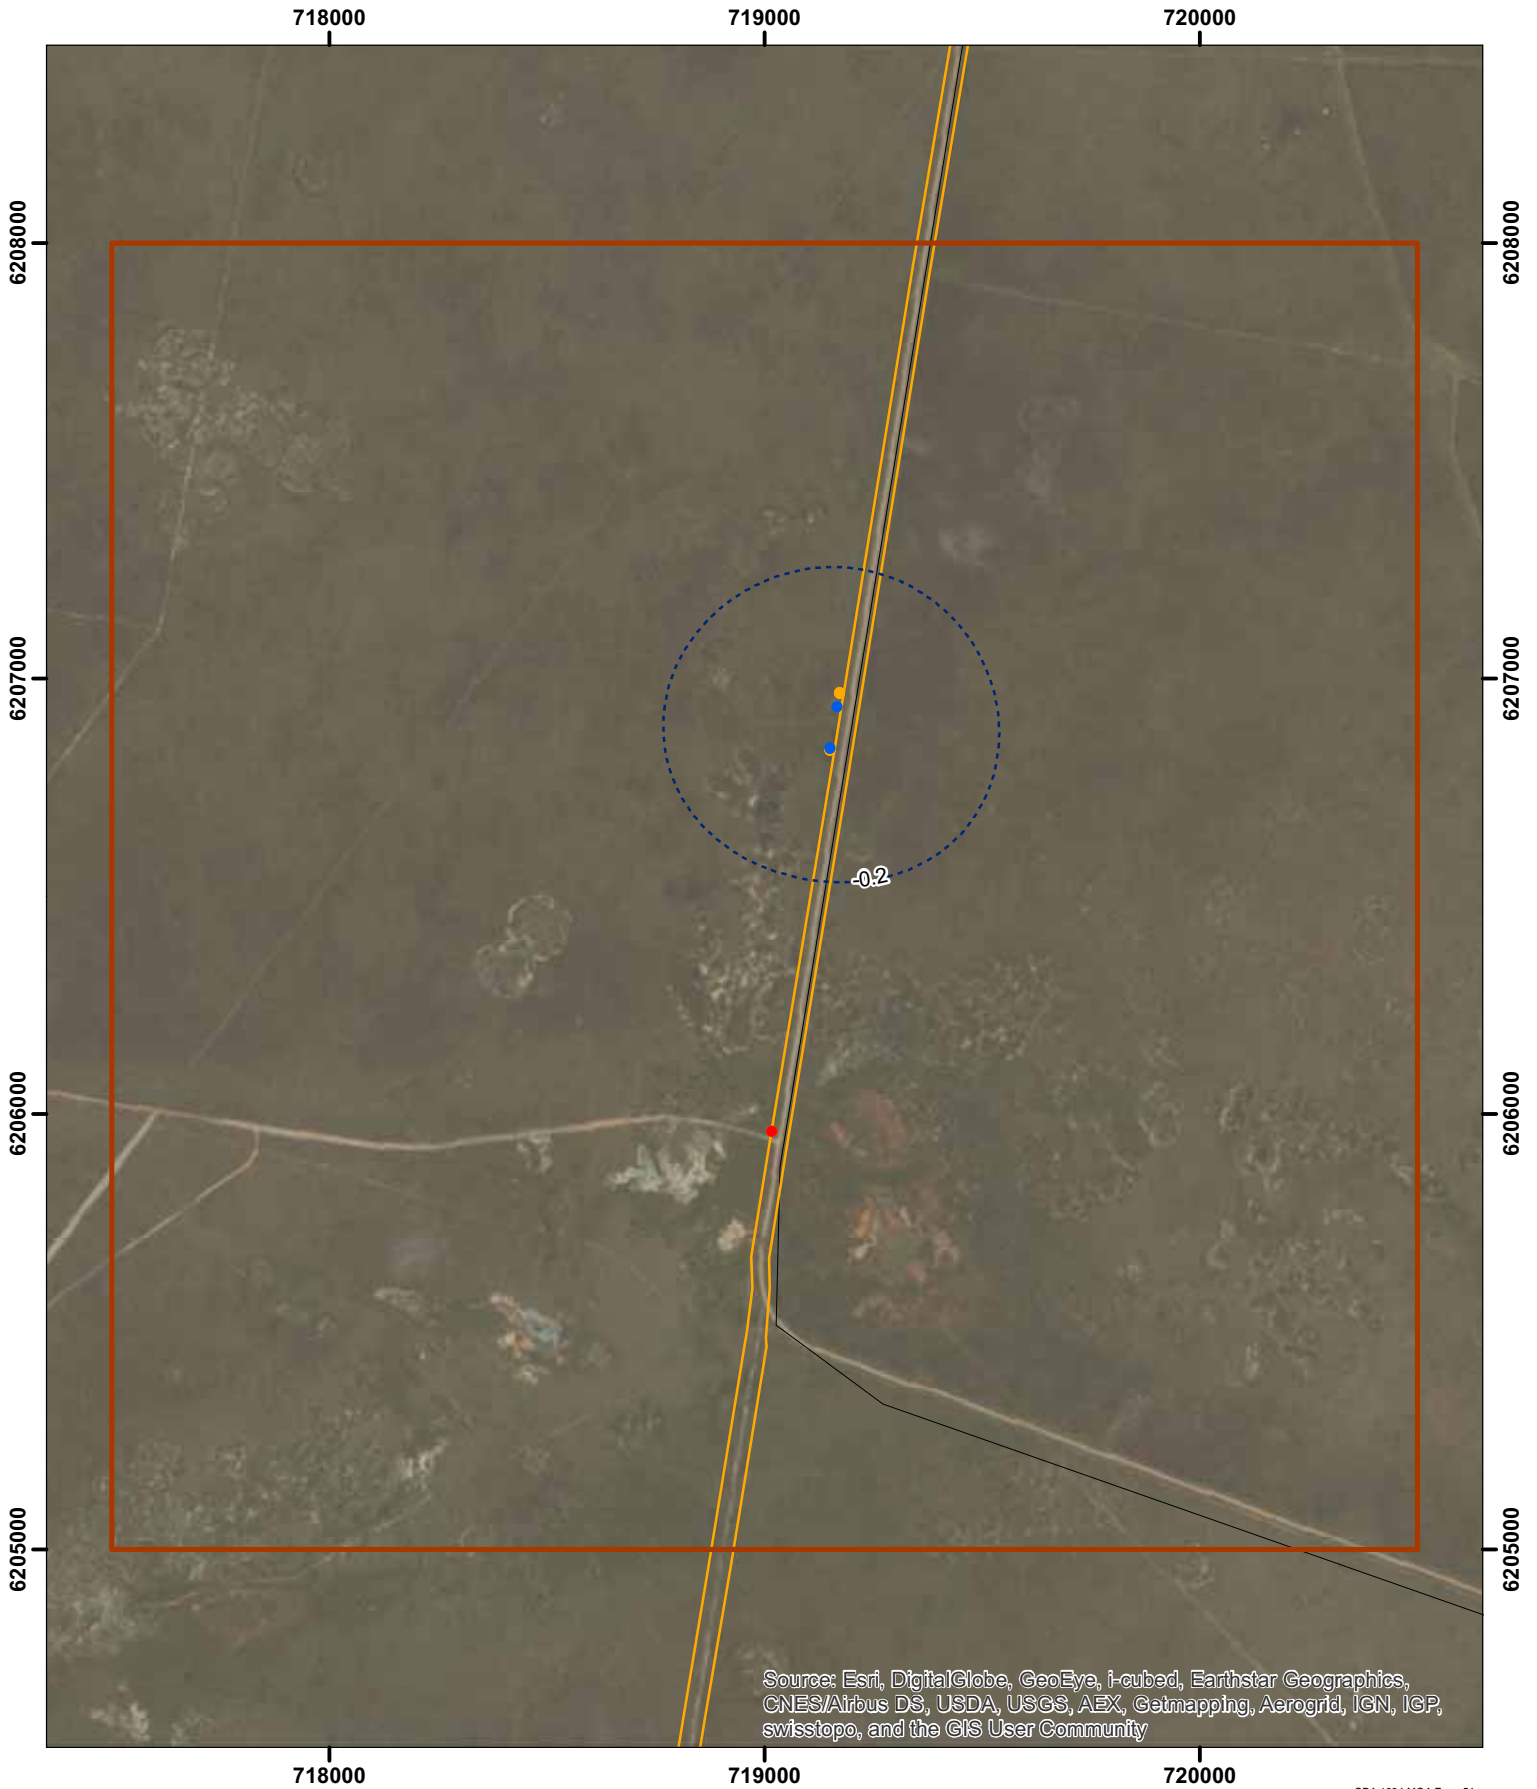

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Minor Road
- Haul road
- UD 1.0 model domain
- Production
- Injection
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



UD1.0 modelled drawdown in Shepparton Formation (deep) on 17/09/2014



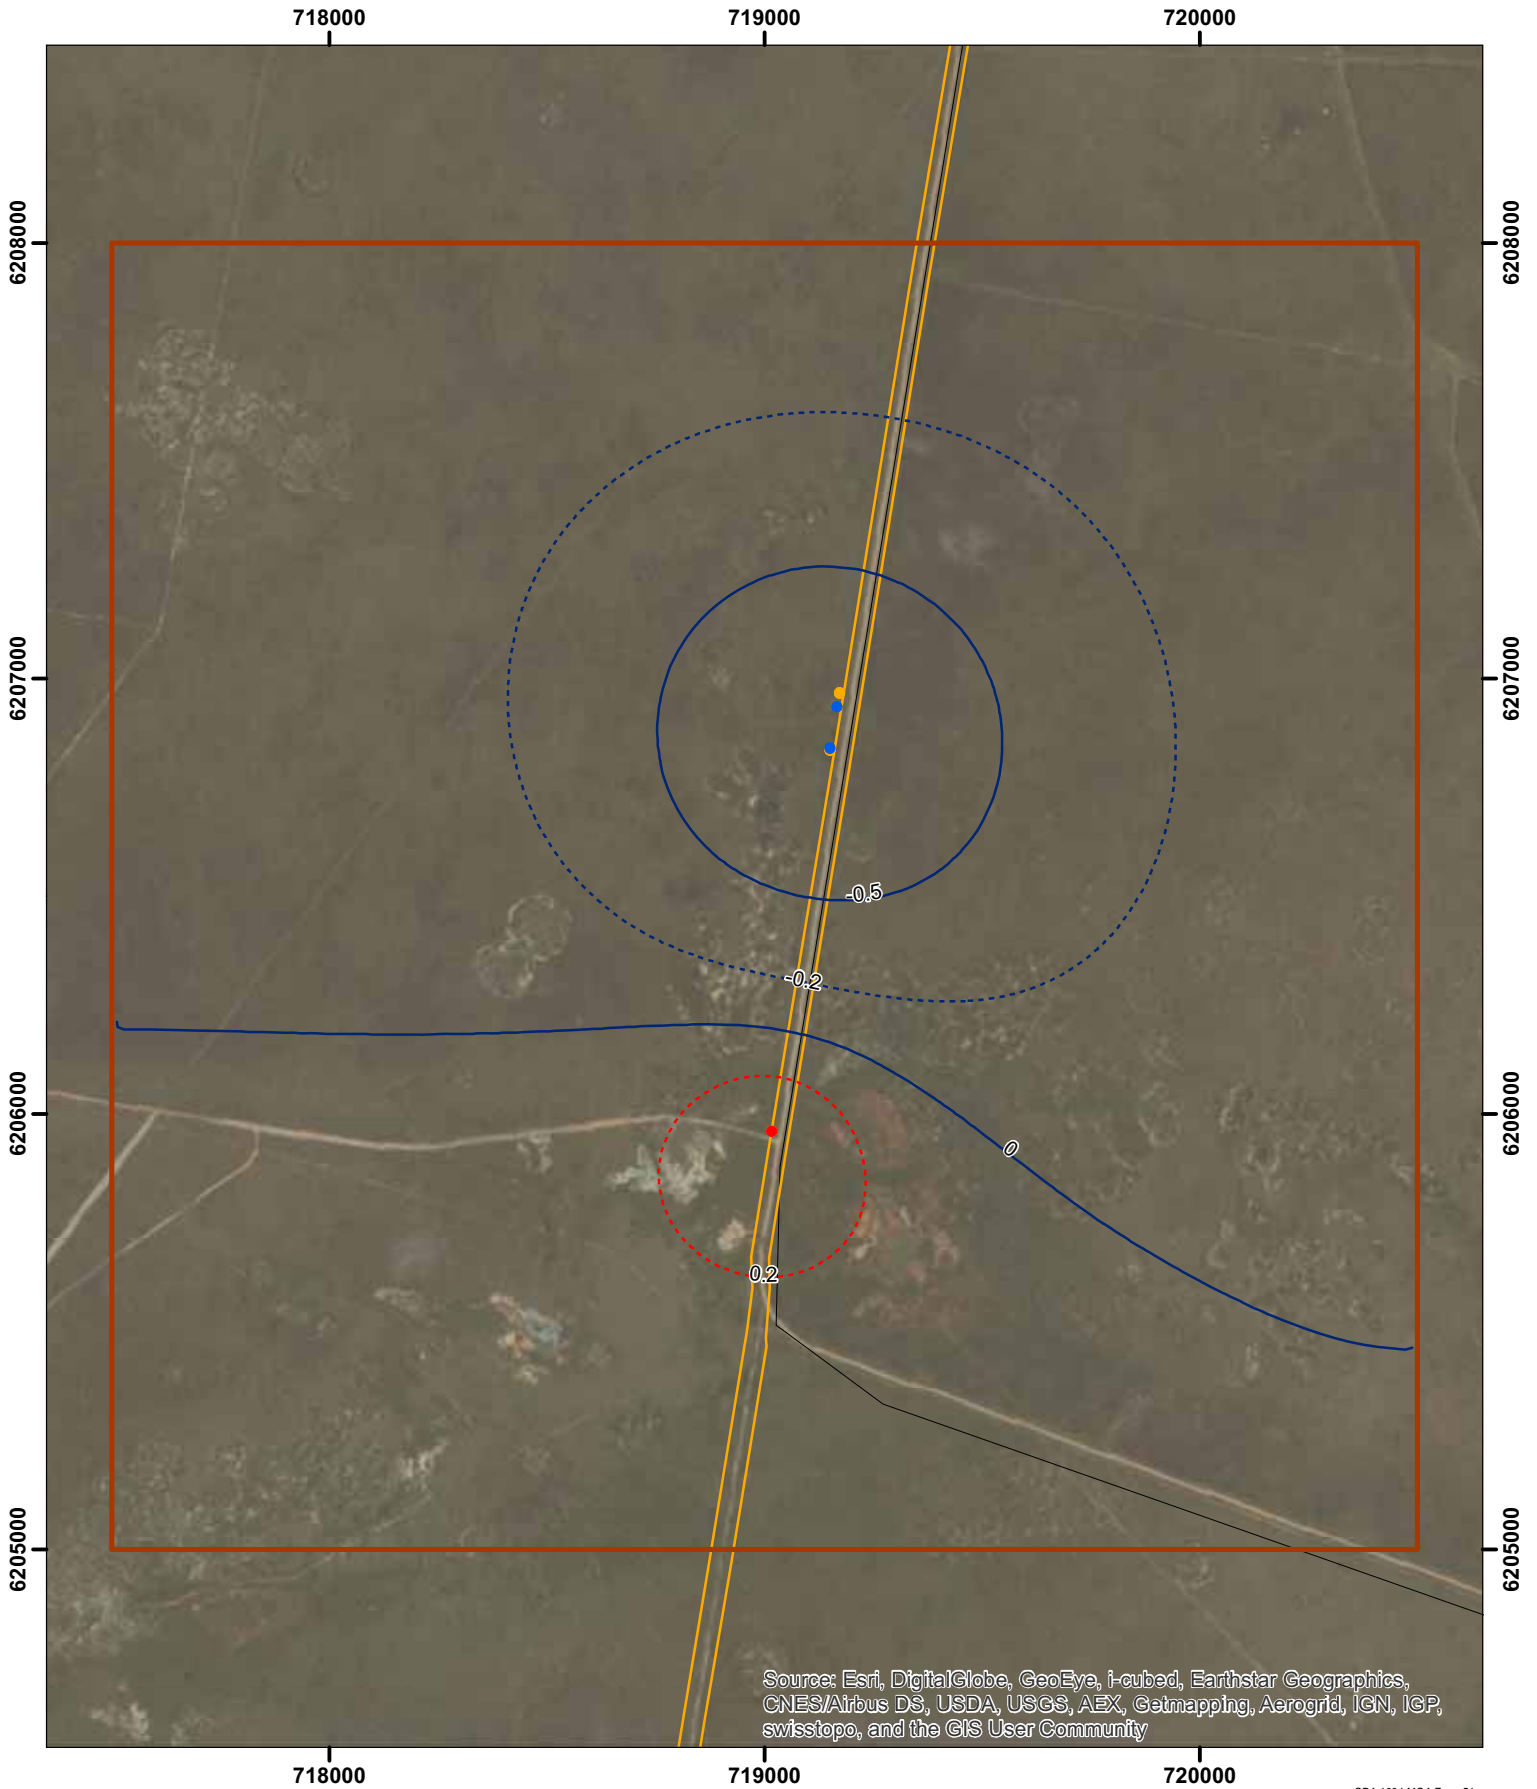


GDA 1994 MGA Zone 54

- Minor Road
- Haul road
- UD 1.0 model domain
- Production
- Injection
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



UD1.0 modelled drawdown in LPS1 FS on 17/09/2014



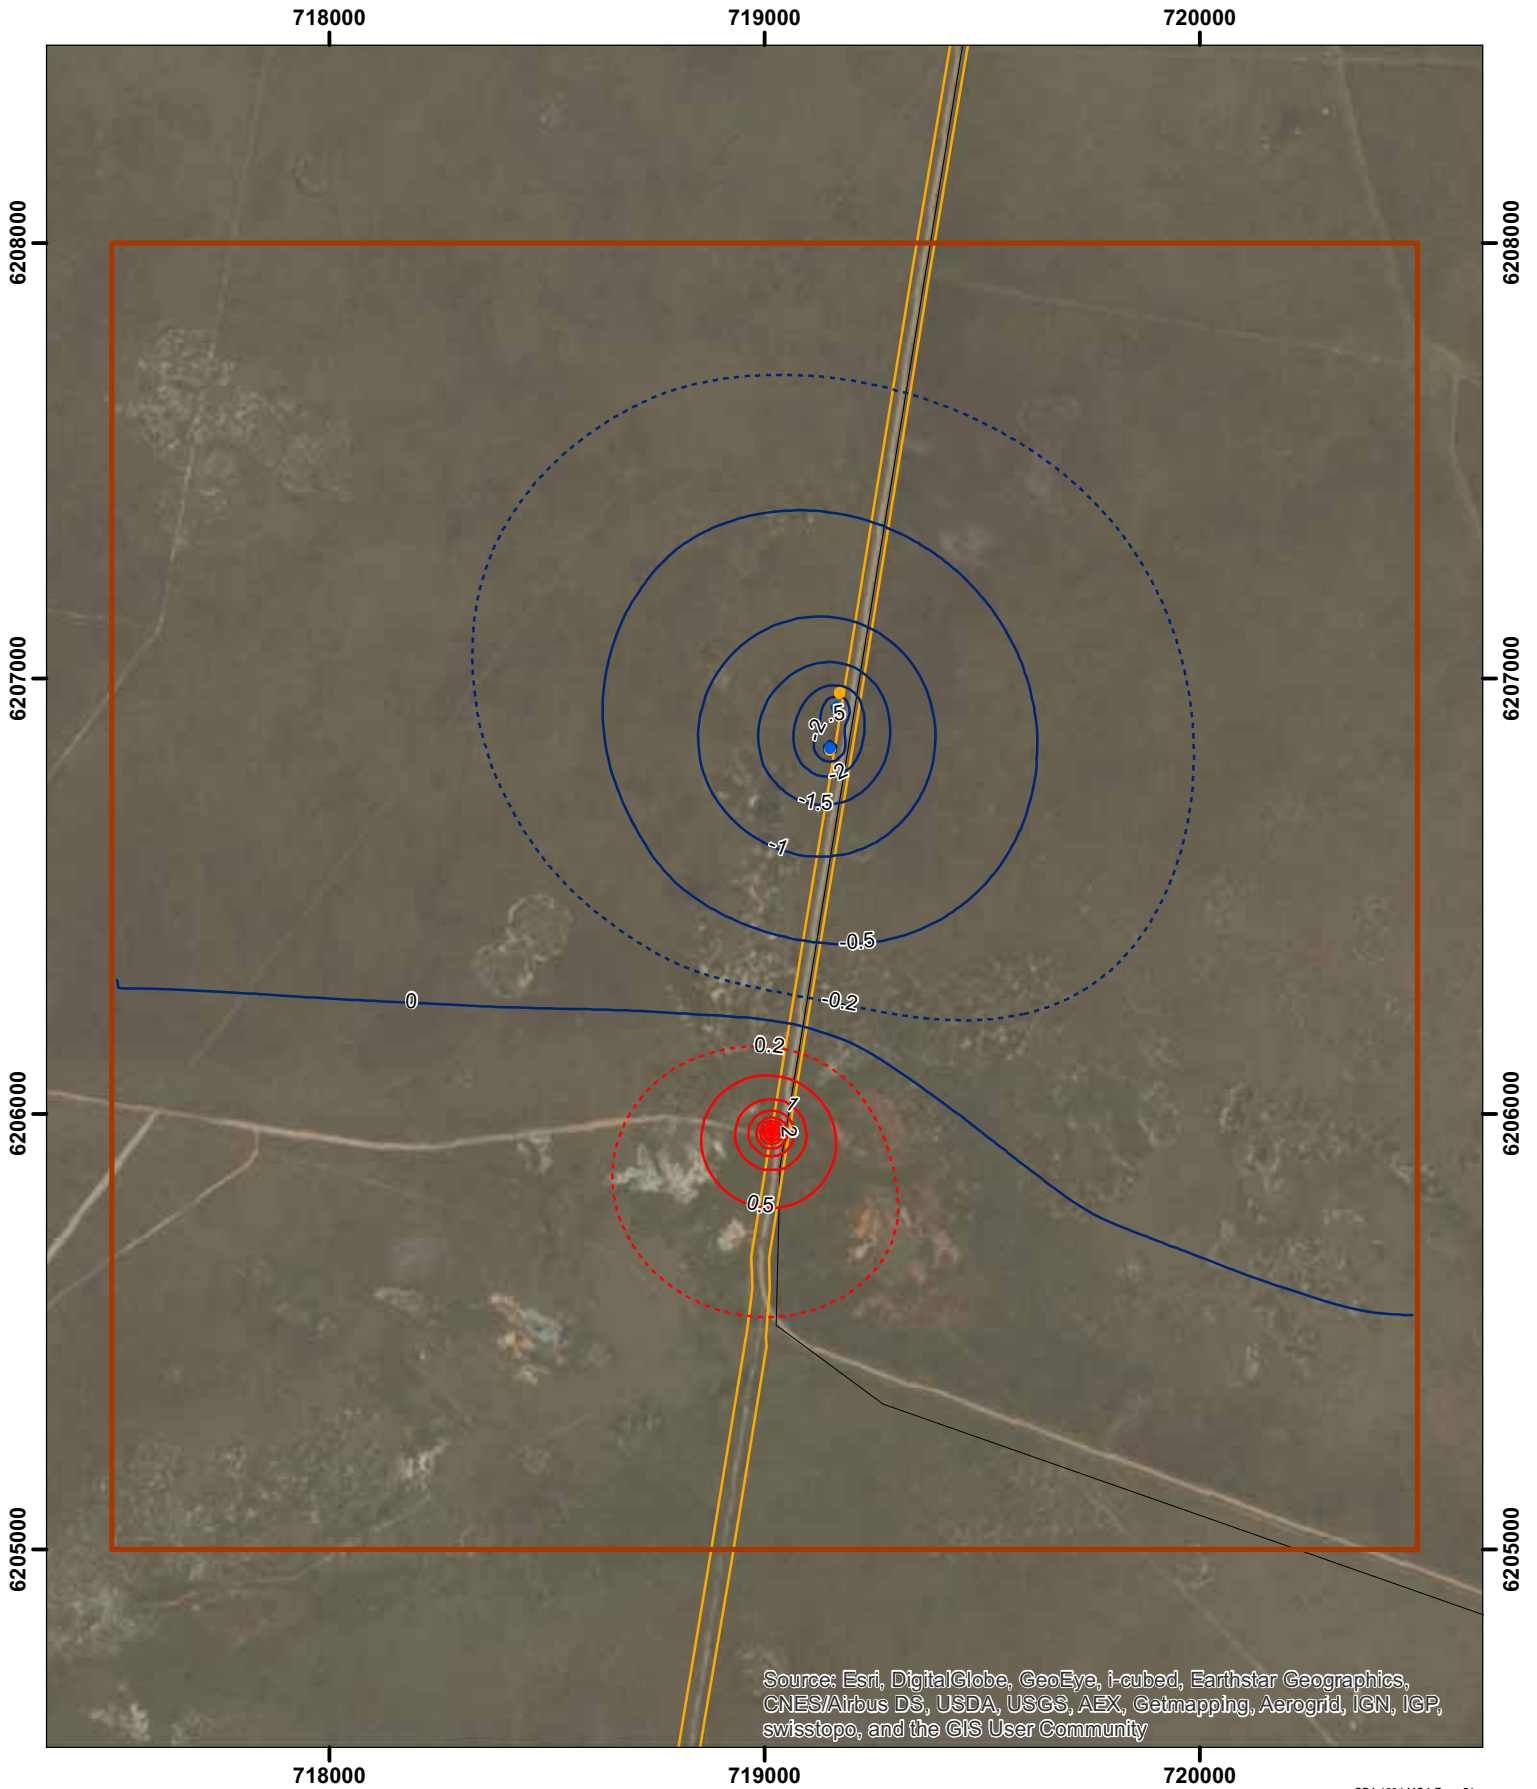


- Minor Road
- Haul road
- UD 1.0 model domain
- Production
- Injection
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



UD1.0 modelled drawdown in LPS1 SZ on 17/09/2014



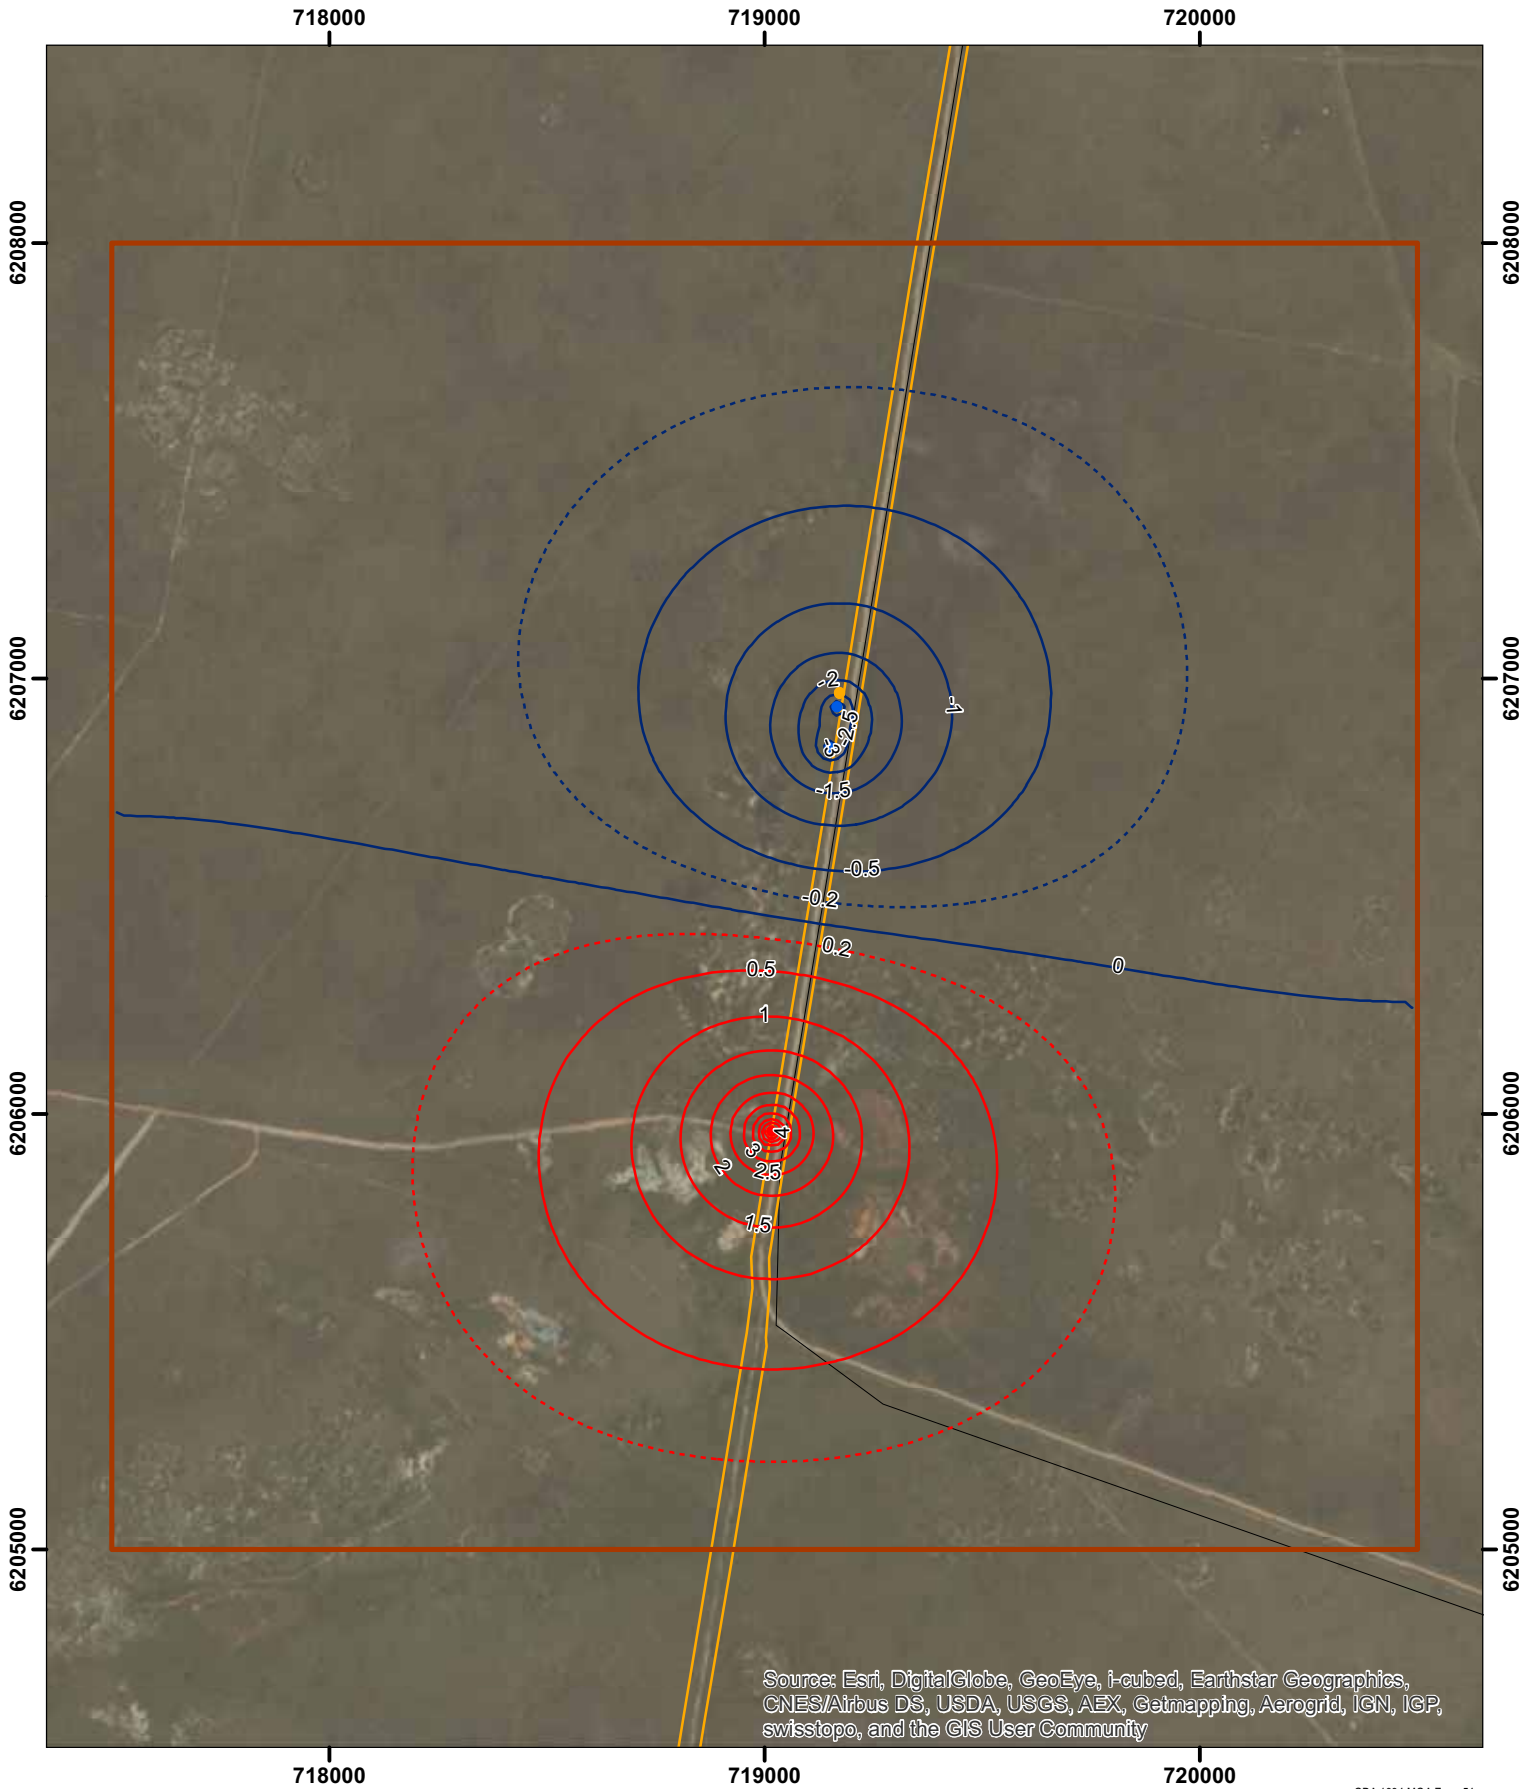


- Minor Road
- Haul road
- ▭ UD 1.0 model domain
- Production
- Injection
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



UD1.0 modelled drawdown in LPS1 LS/LPS2 FS on 17/09/2014



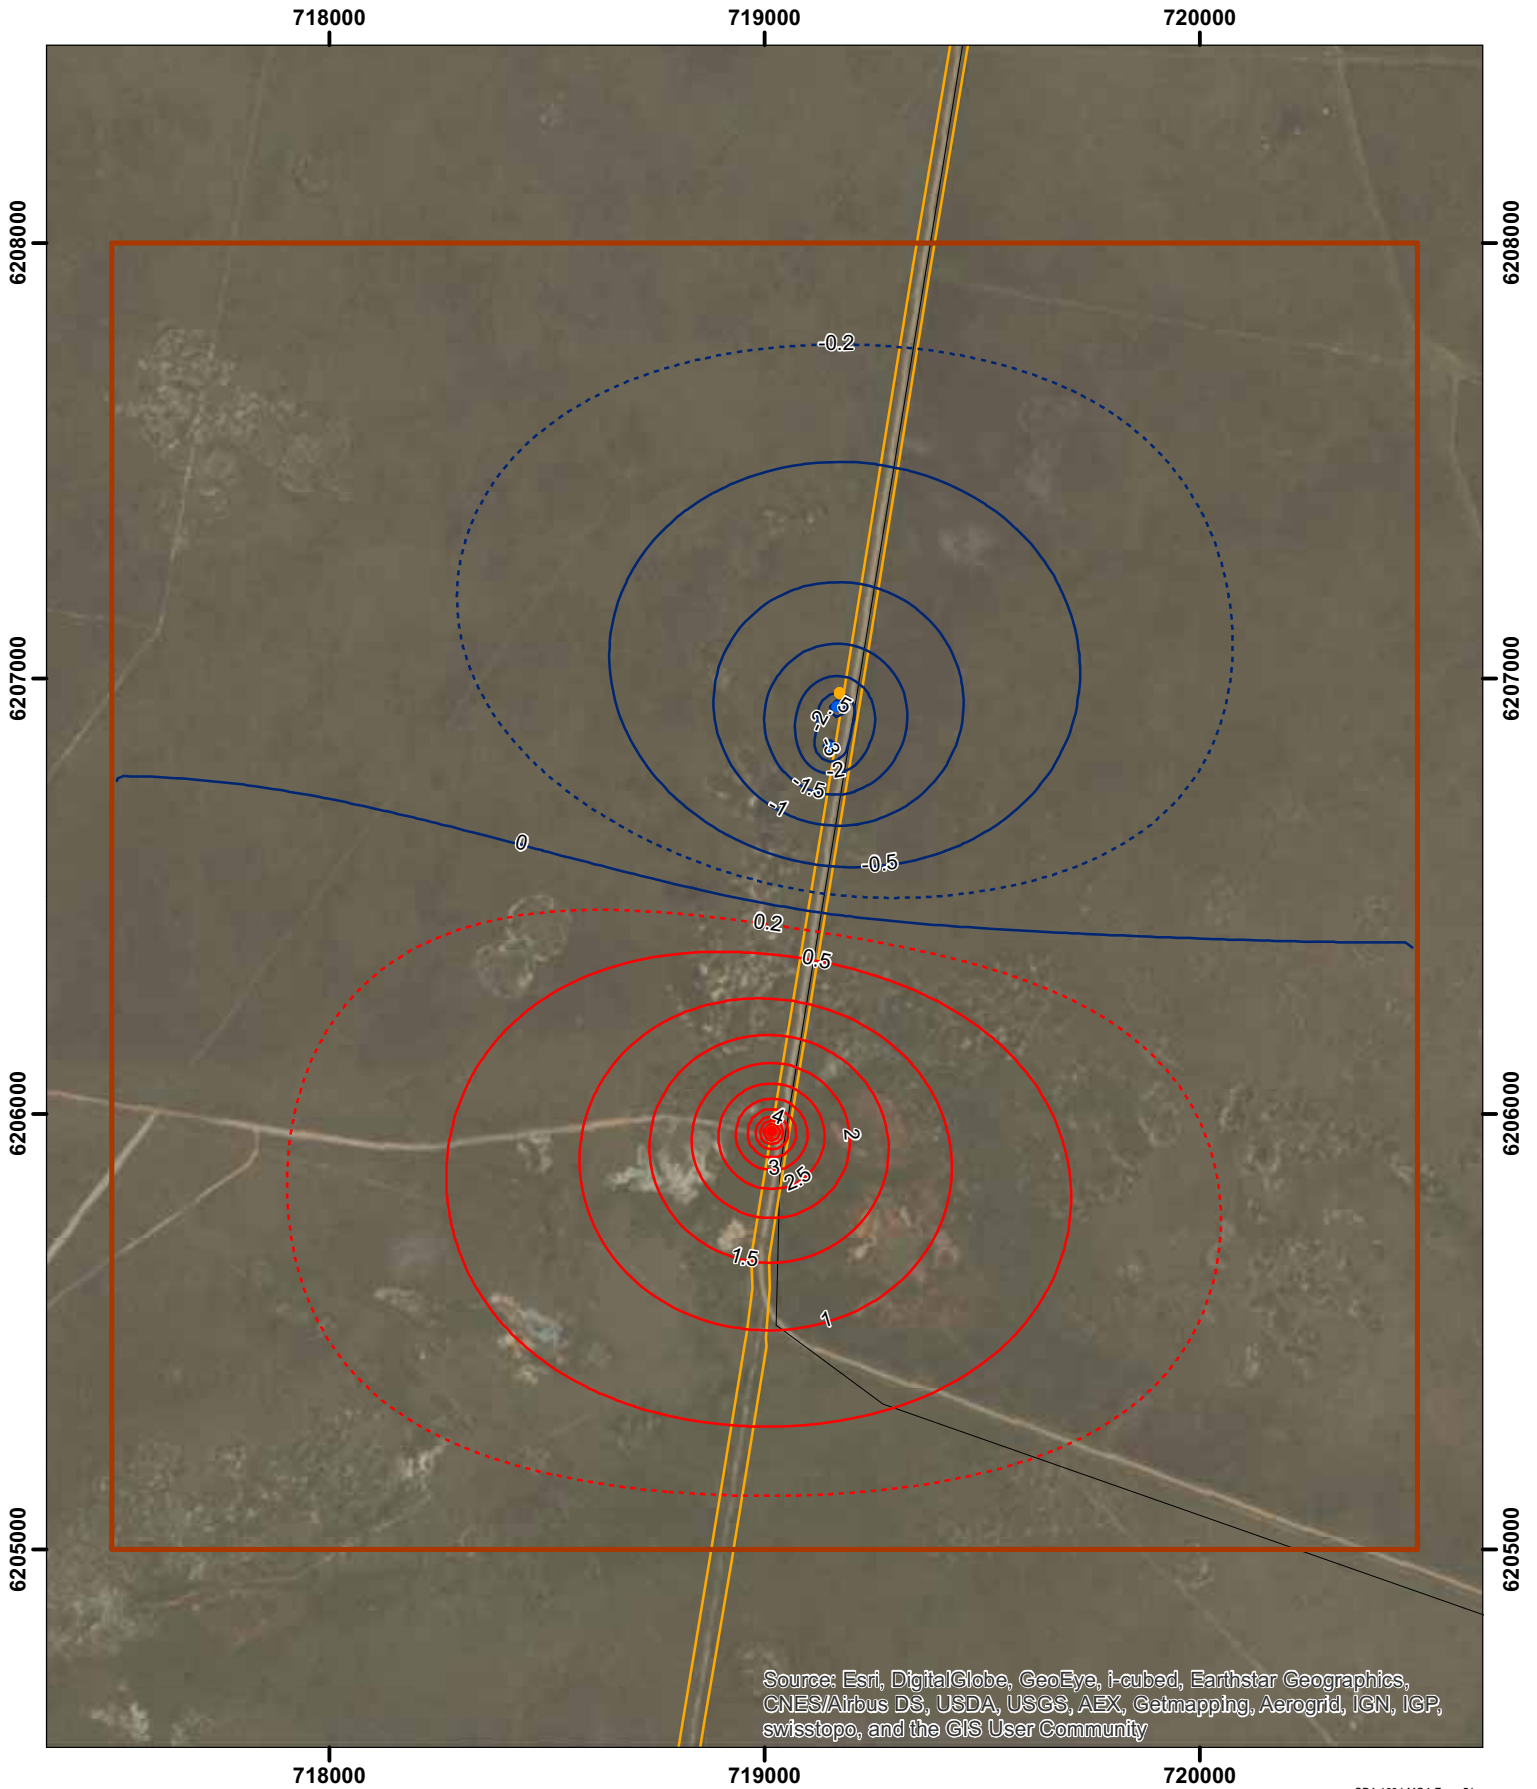

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Minor Road
- Haul road
- UD 1.0 model domain
- Production
- Injection
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



UD1.0 modelled drawdown in LPS2 SZ on 17/09/2014



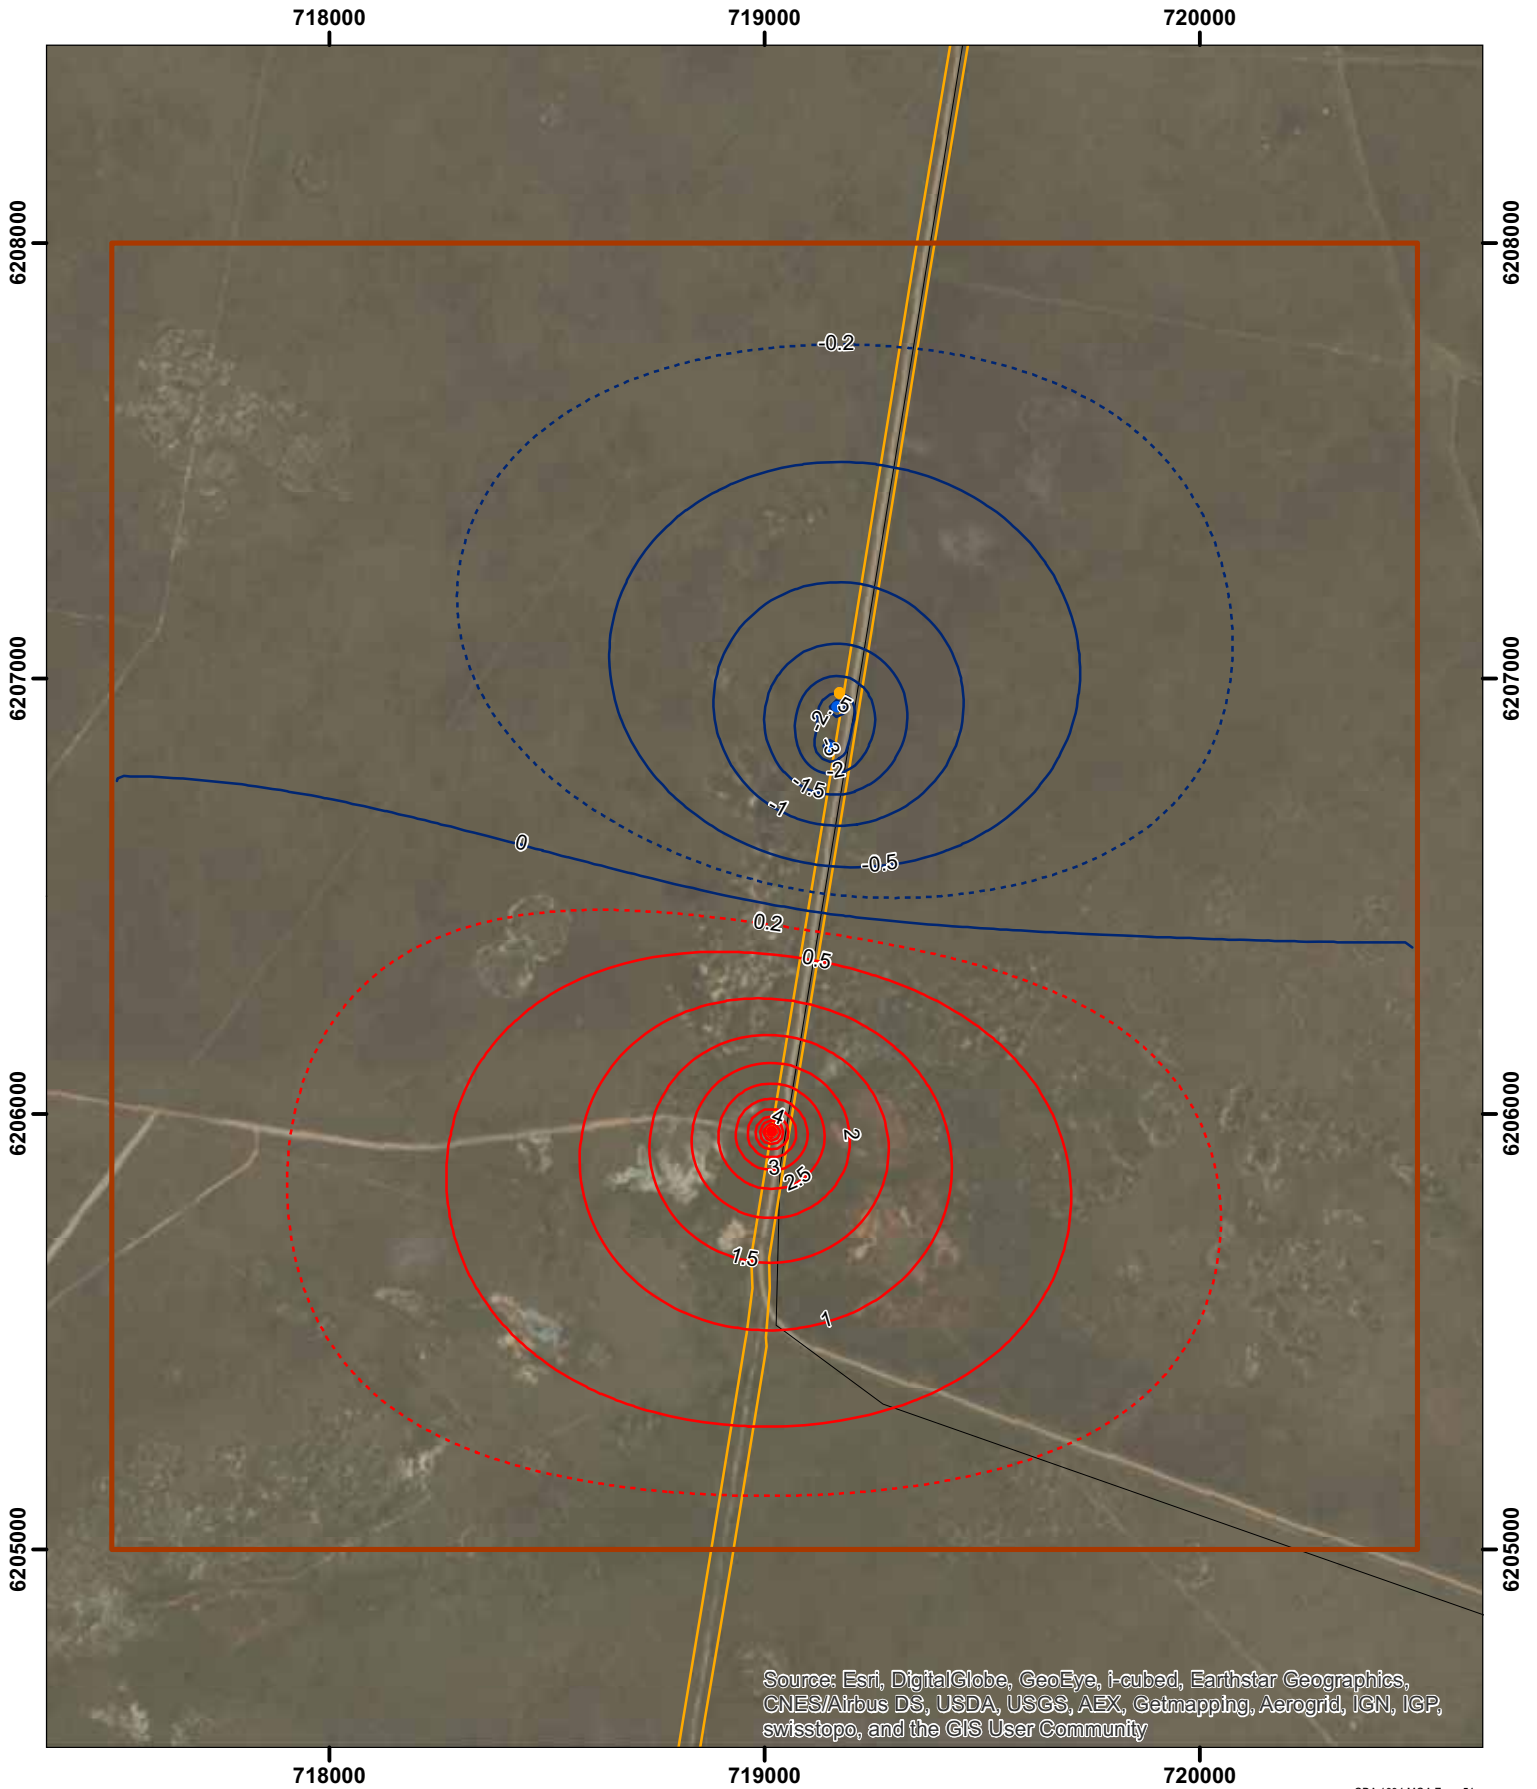

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Minor Road
- Haul road
- ▭ UD 1.0 model domain
- Production
- Injection
- Observation
- Modelled drawdown (m)
- Modelled mounding (m)



UD1.0 modelled drawdown in LPS2 LS on 17/09/2014



Appendix E. Modelled drawdown and depth to water



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 1

I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20180101_L1_DD.mxd



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 1





Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 2

I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20190101_L1_DD.mxd



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 2





- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 3

I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20200101_L1_DD.mxd



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 3



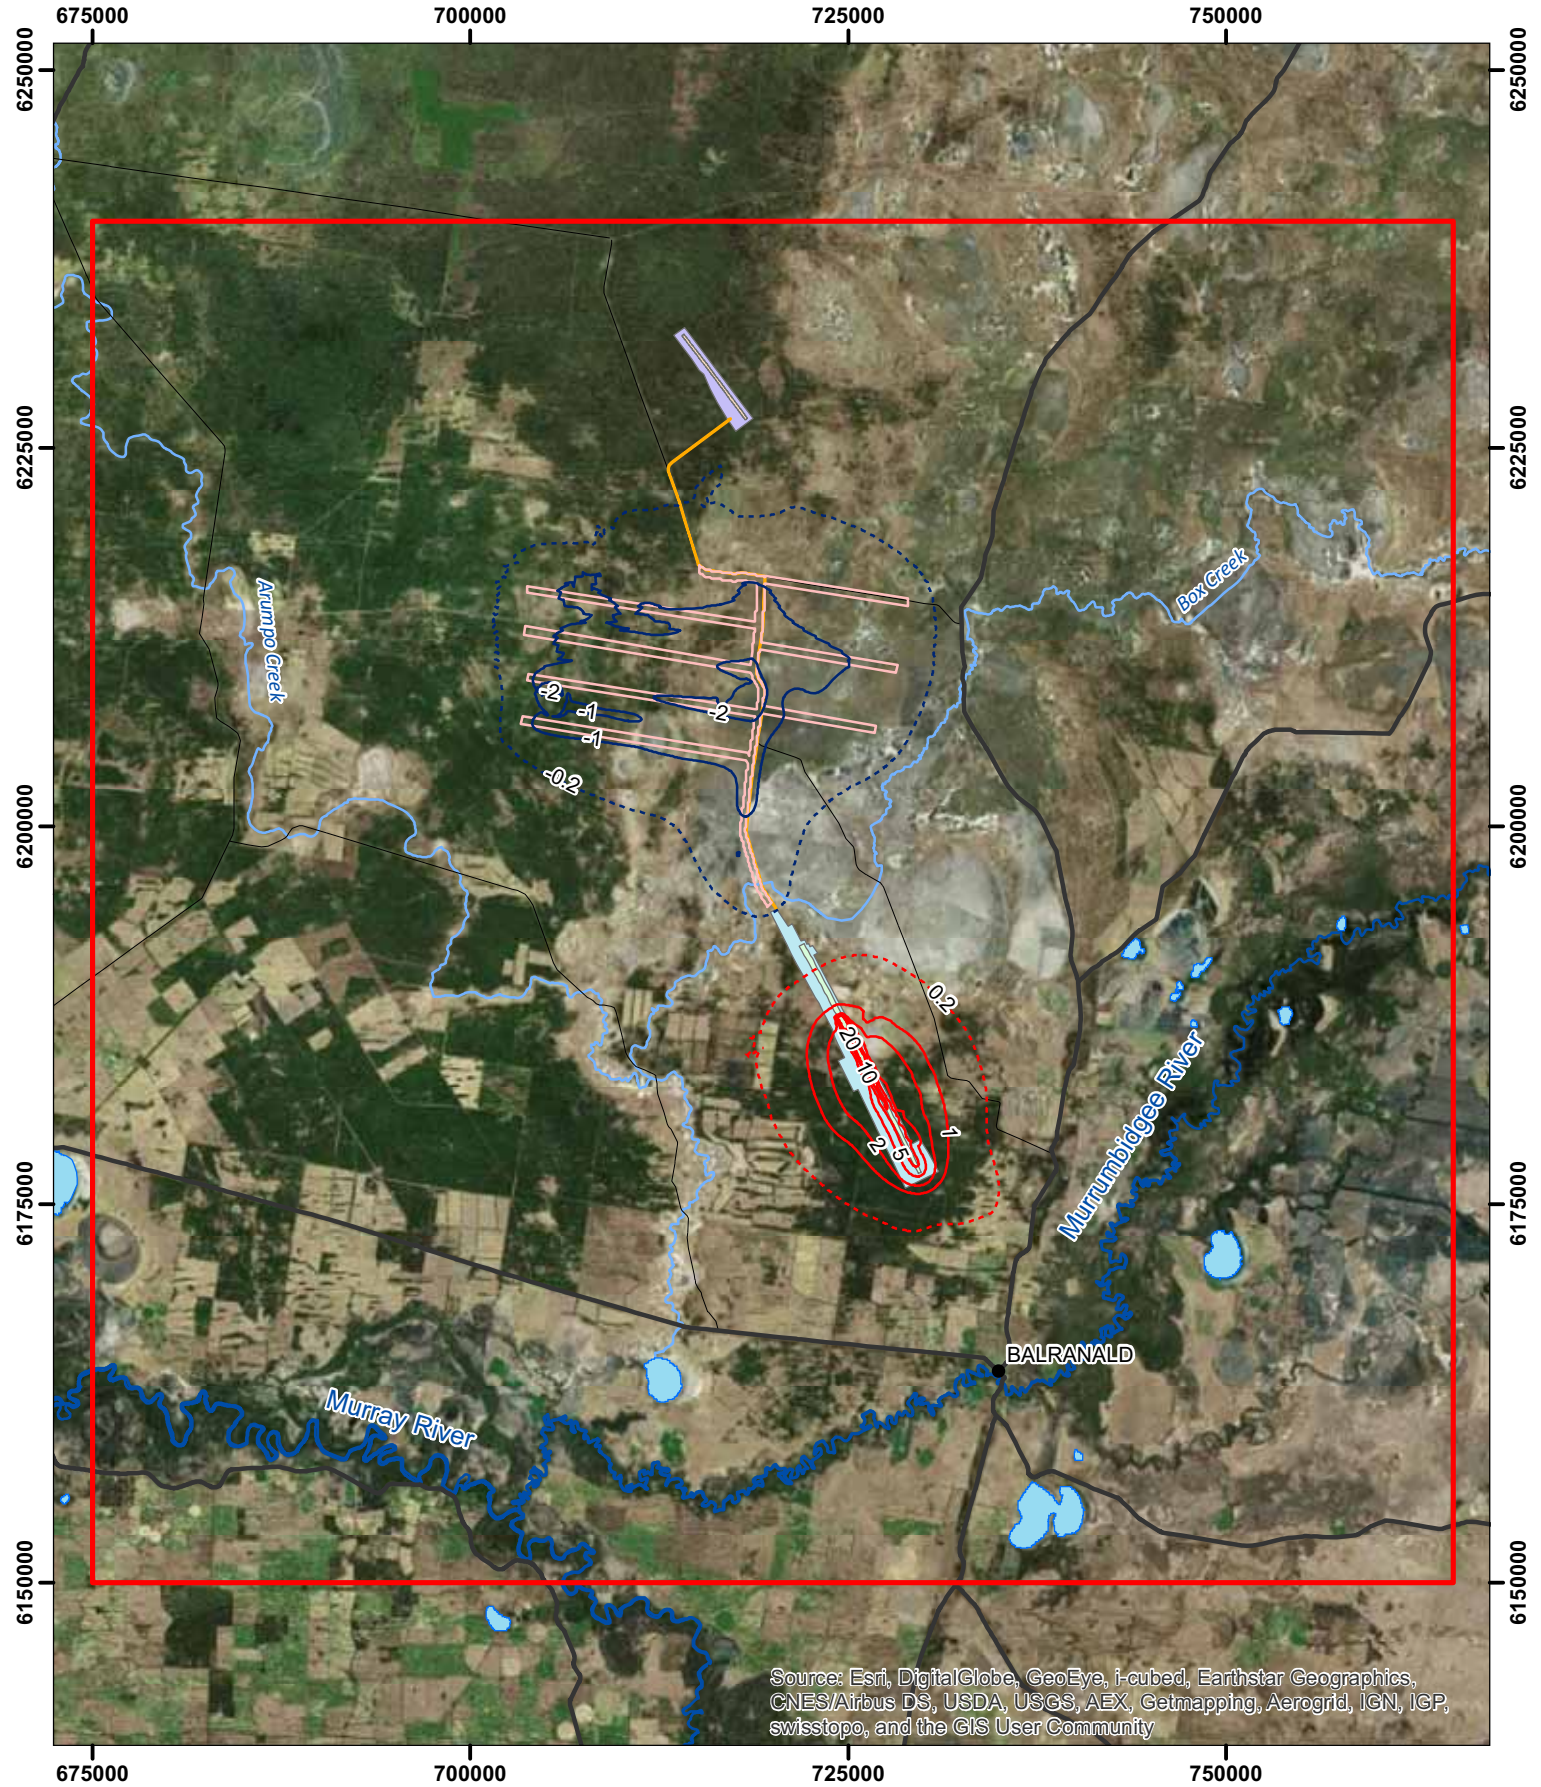


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 4

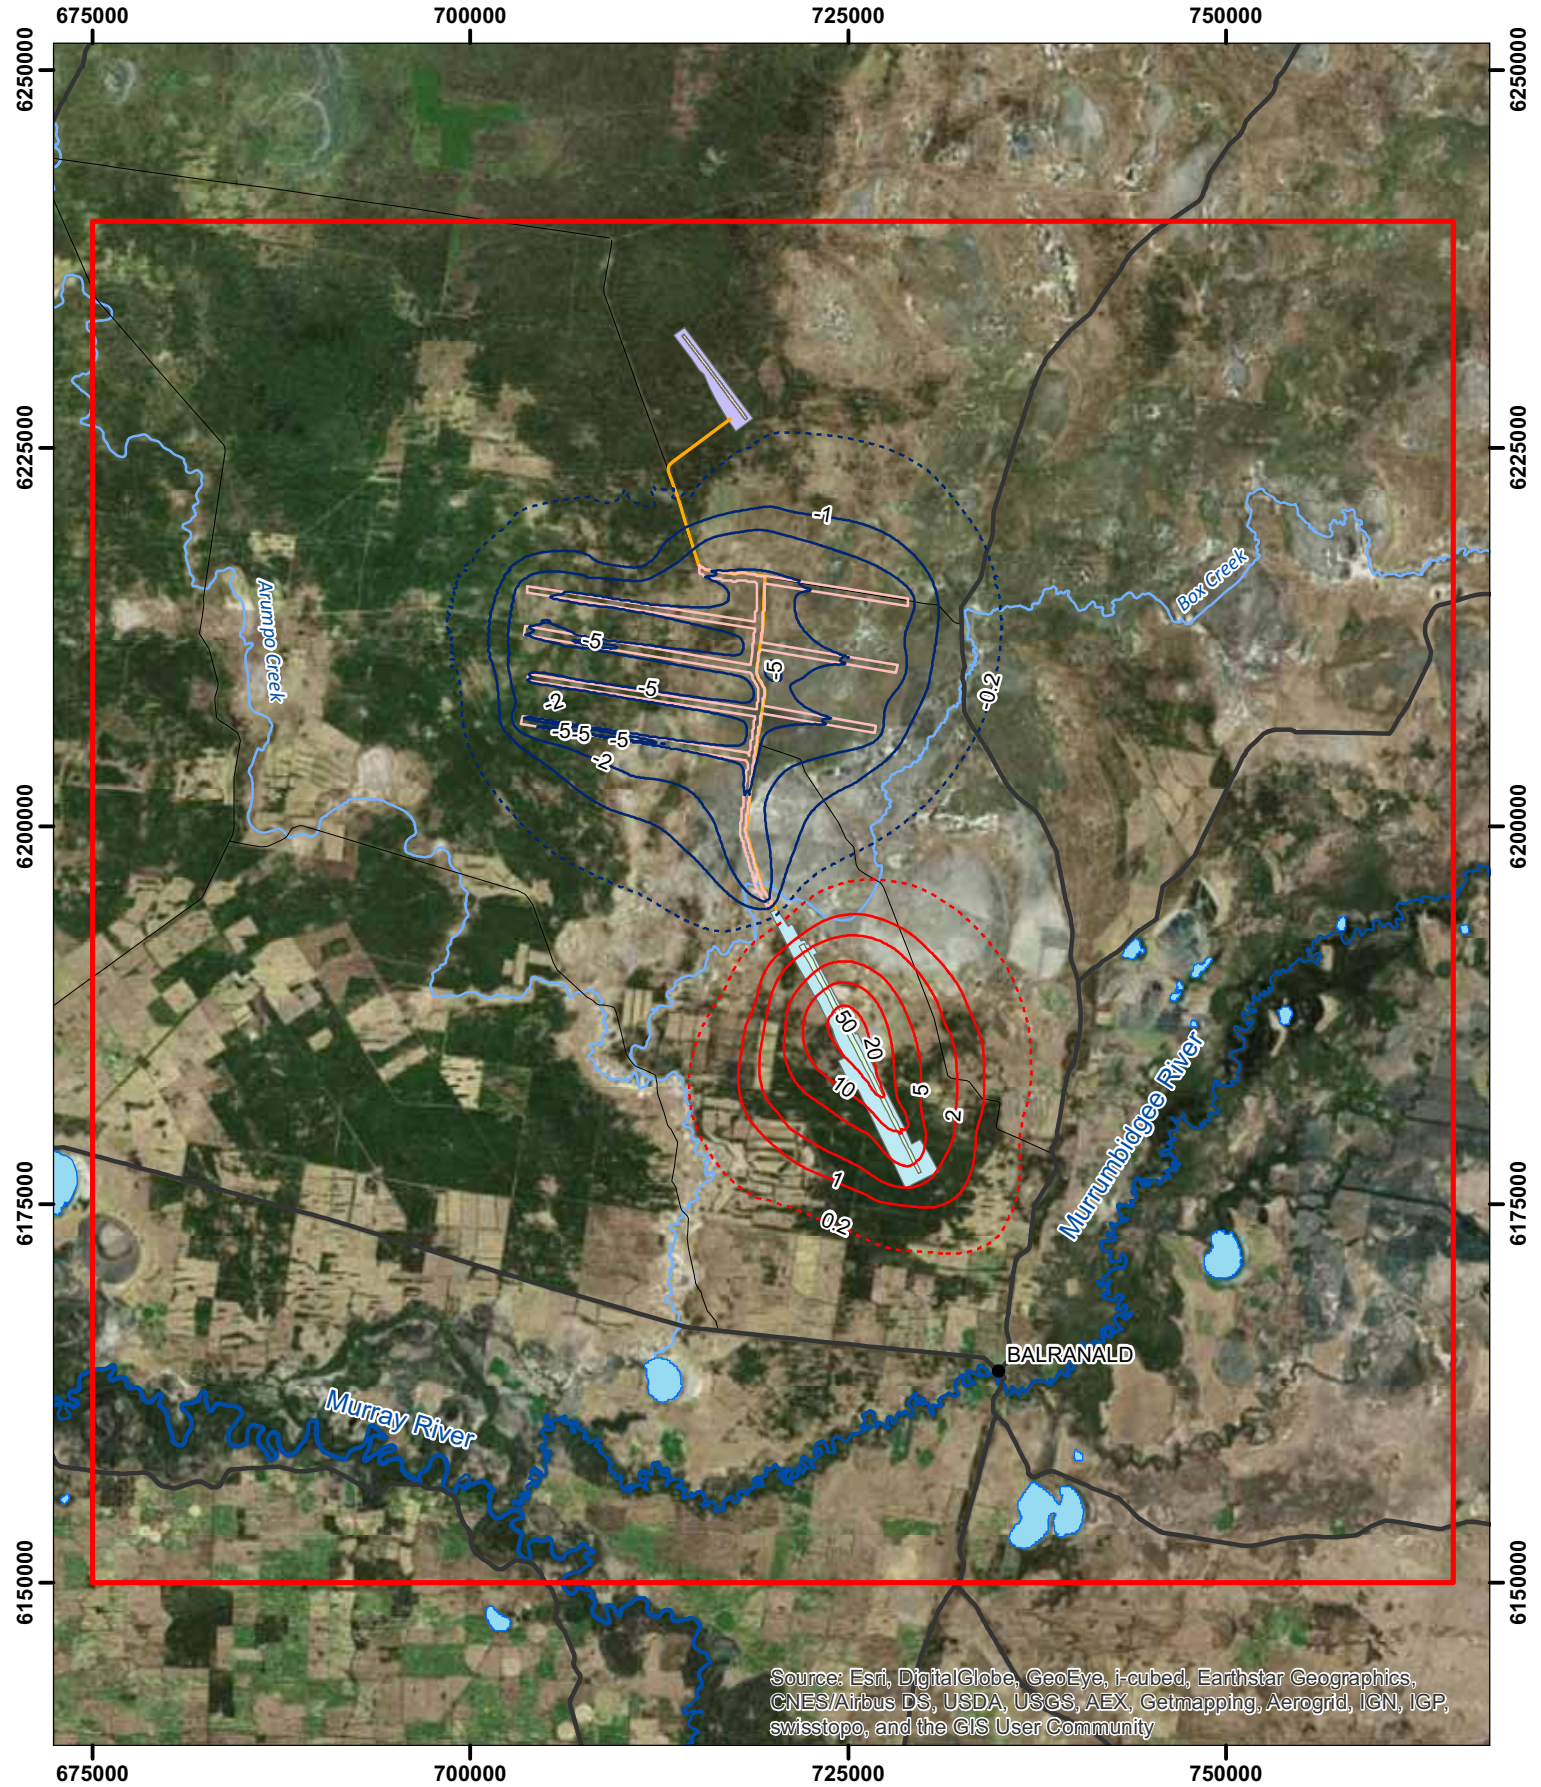

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 4



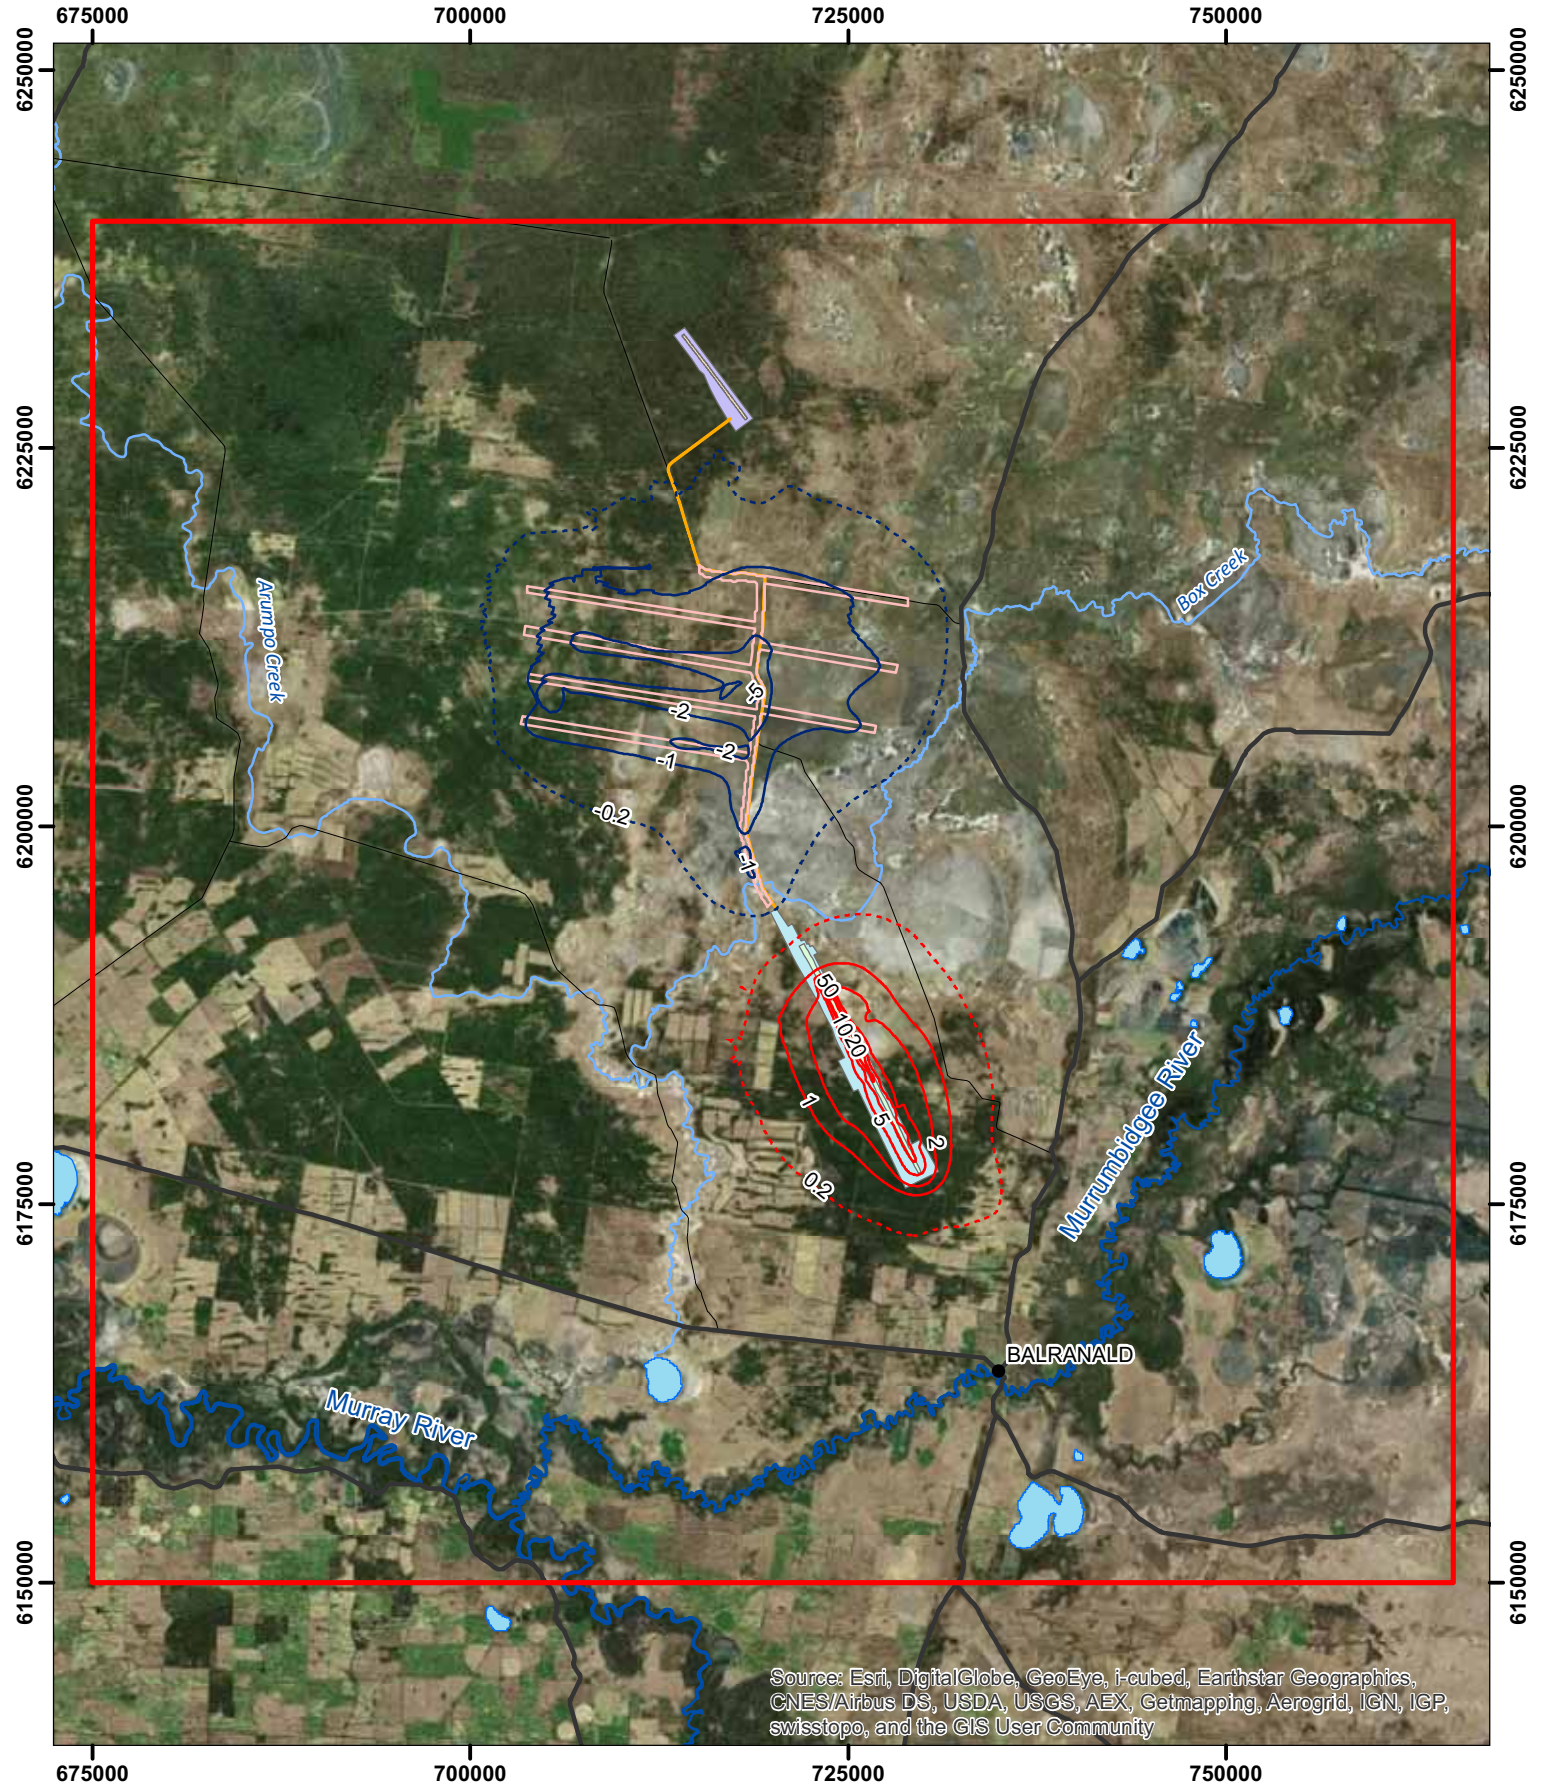

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 5

I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20220101_L1_DD.mxd




- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 5



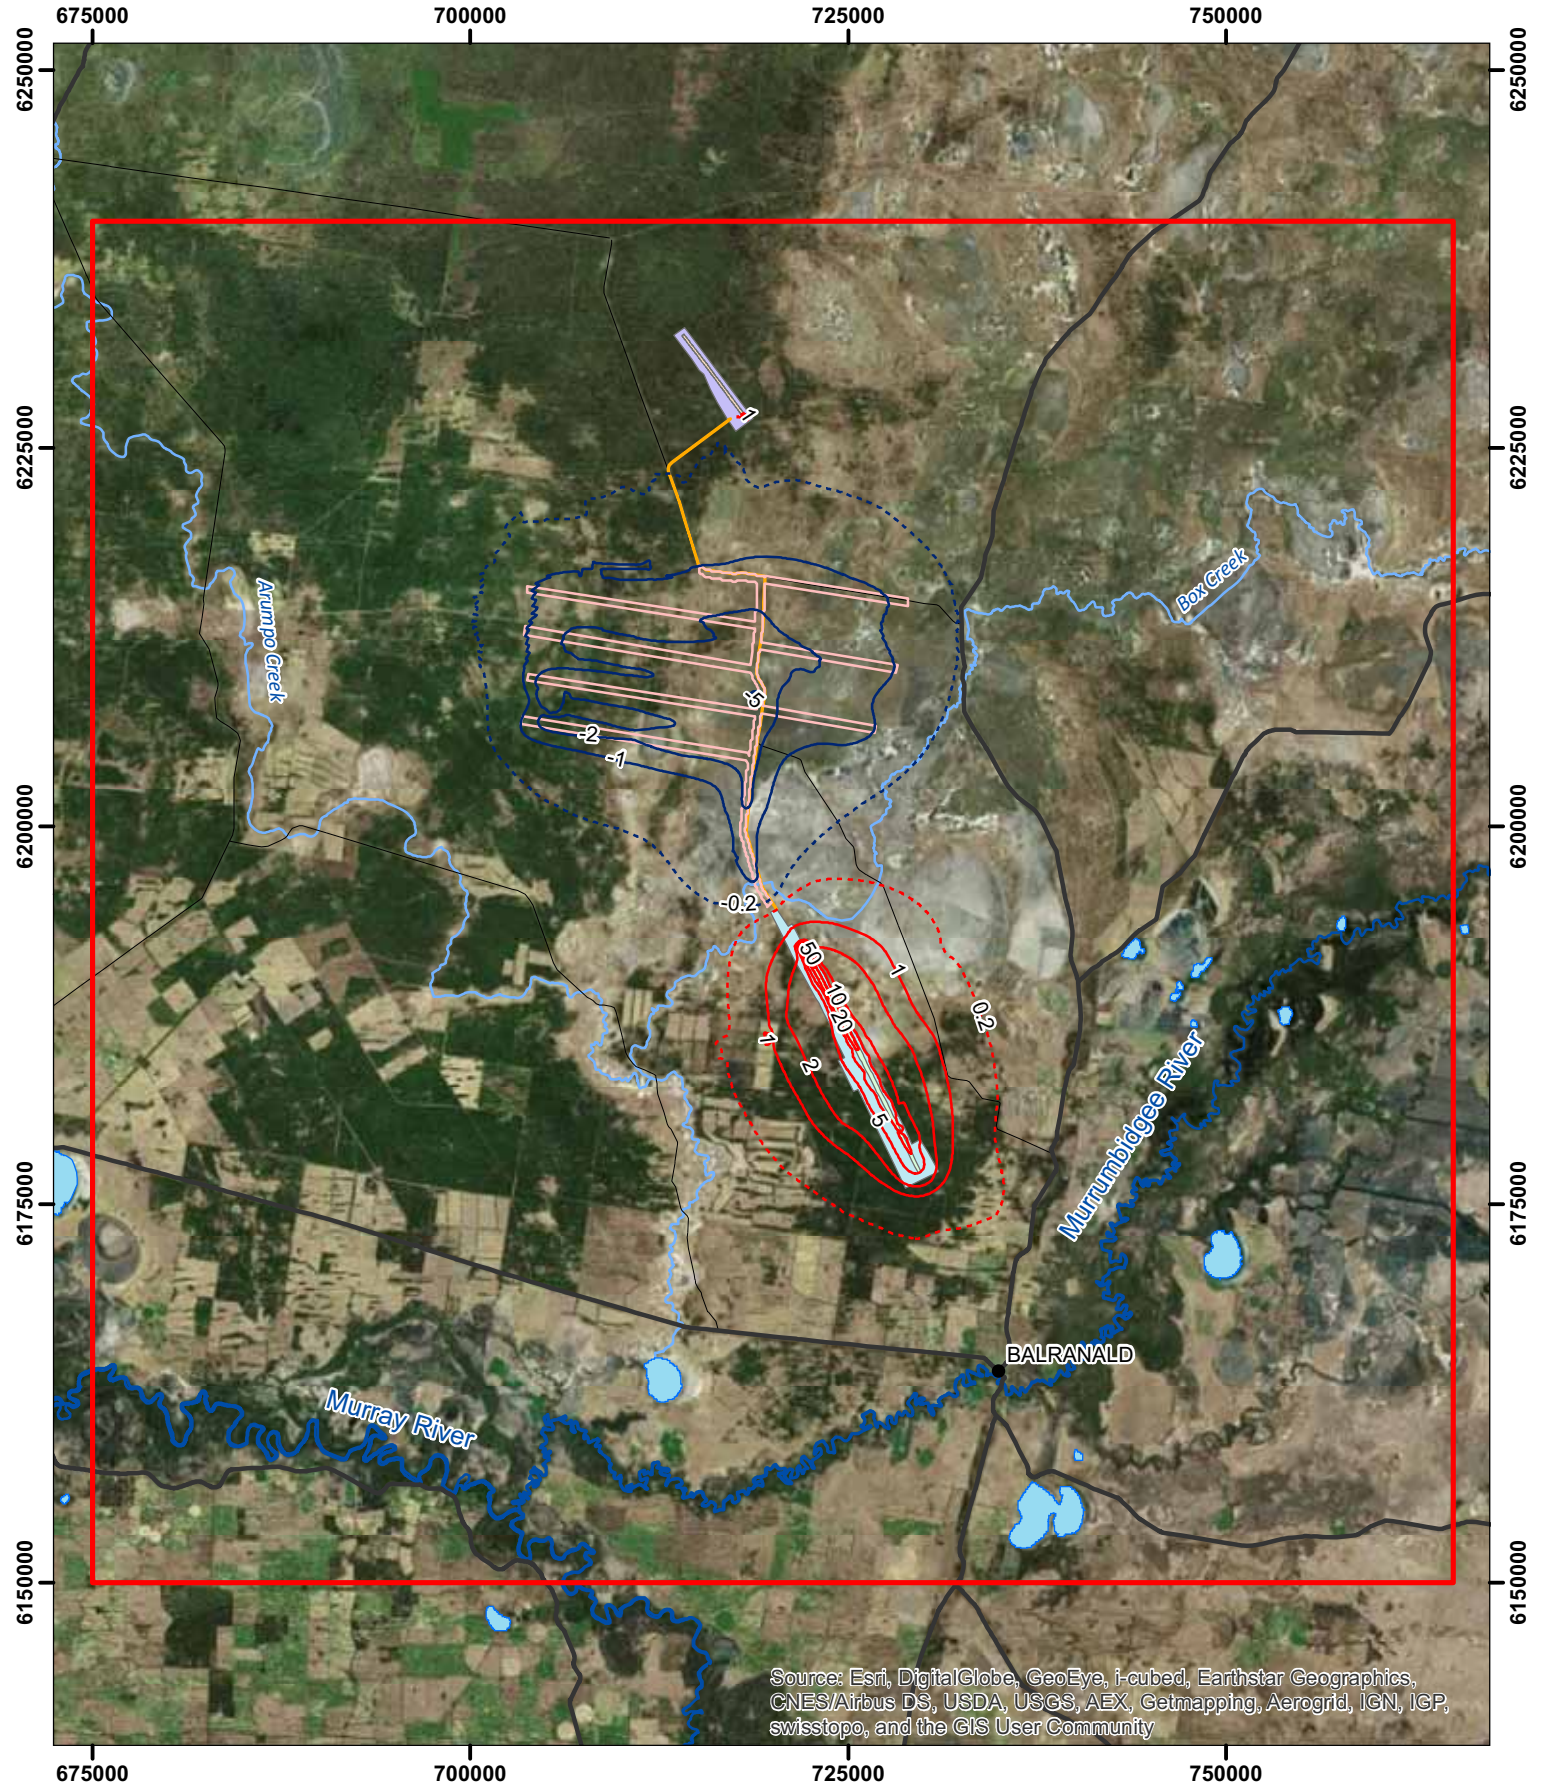


Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 6

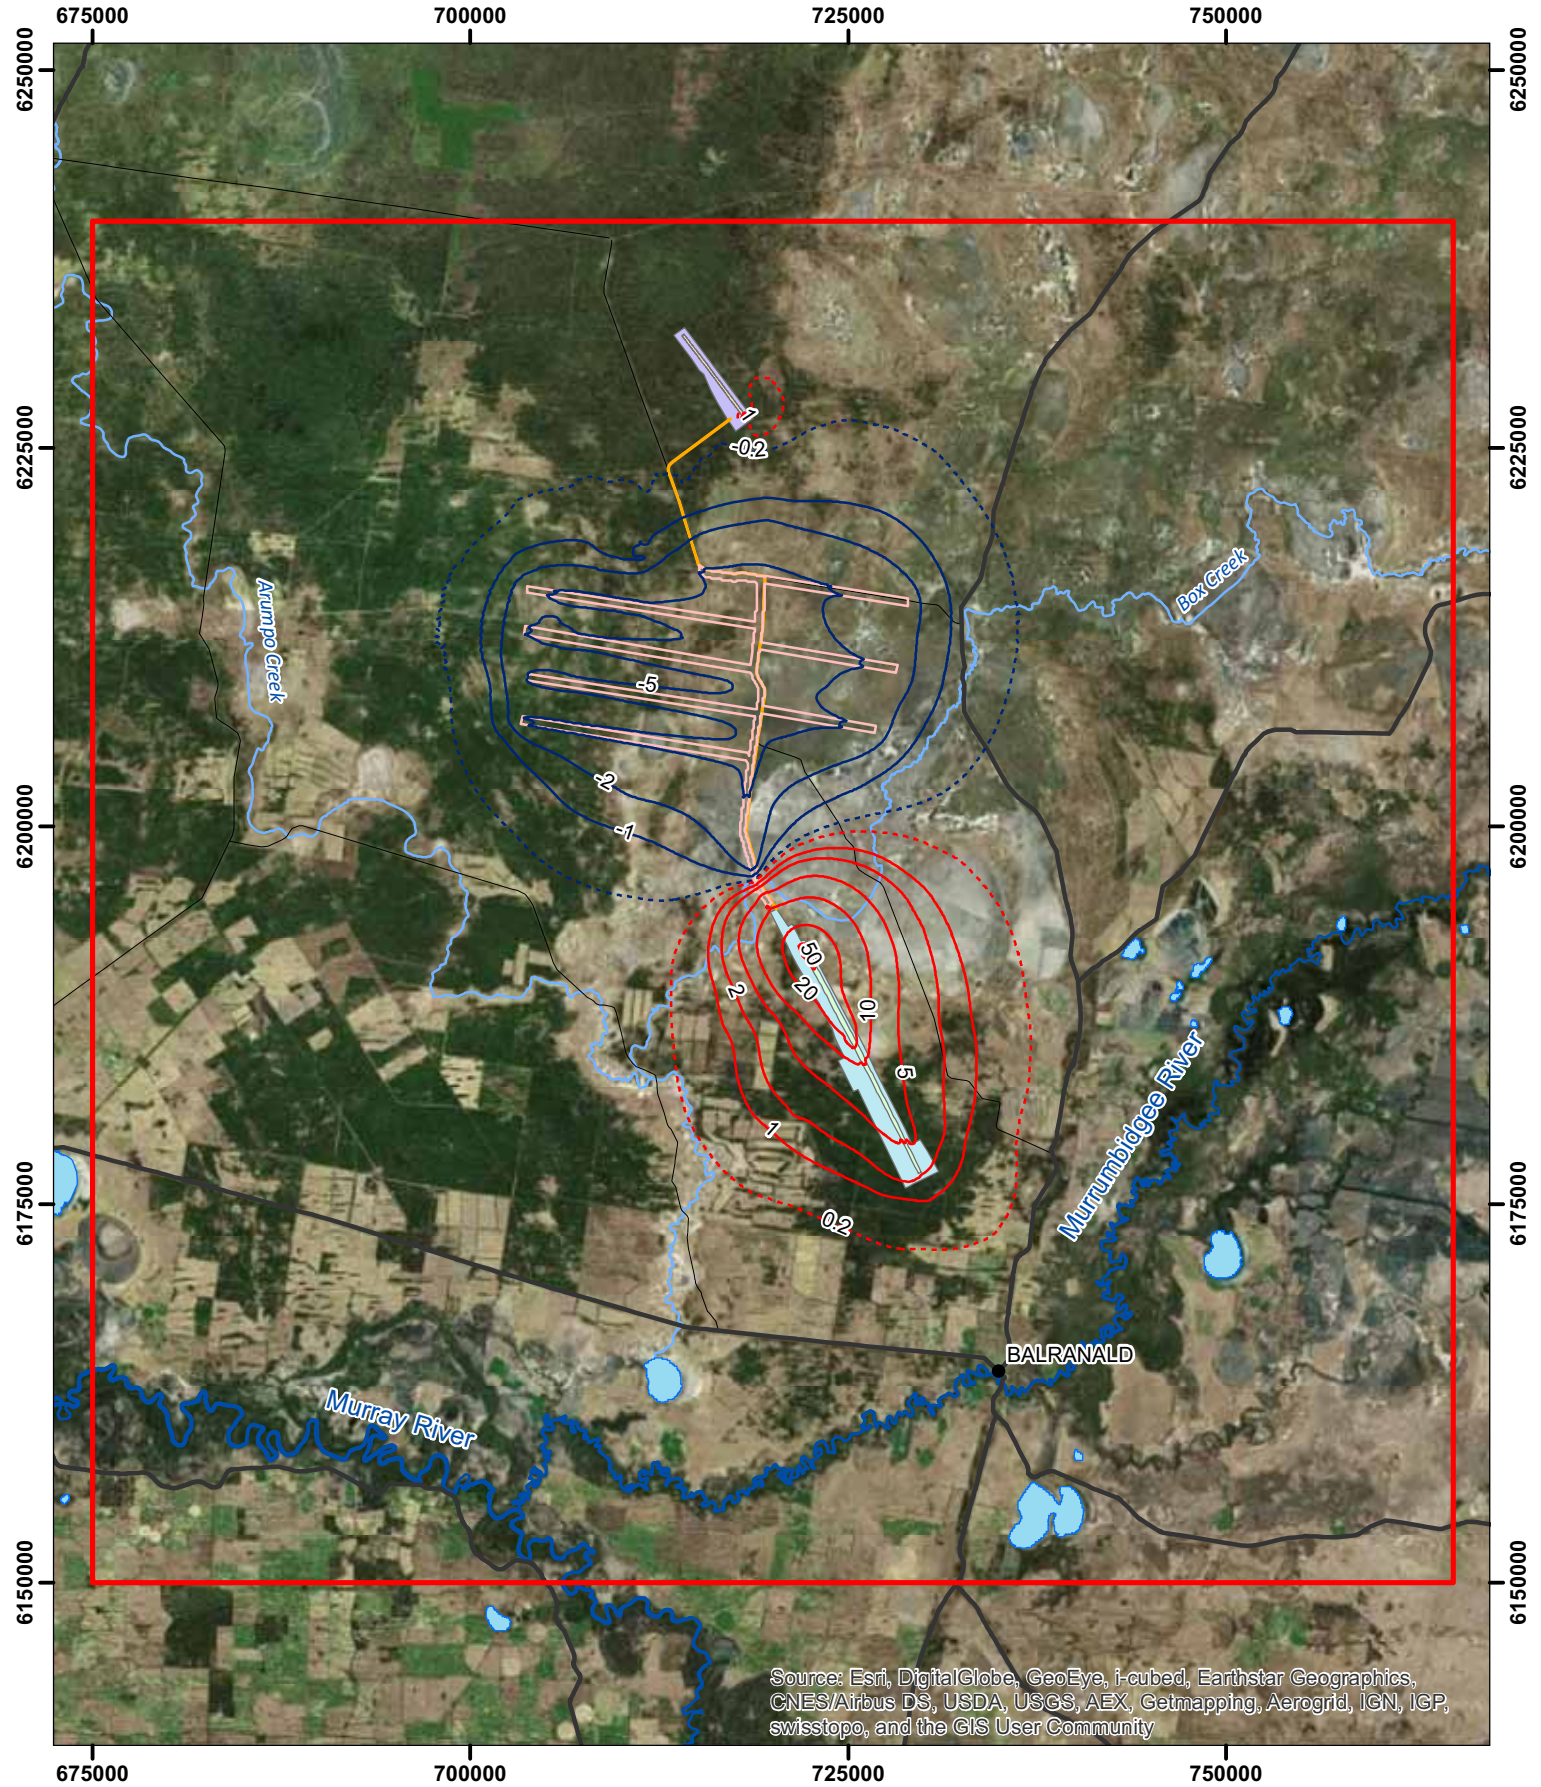

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 6



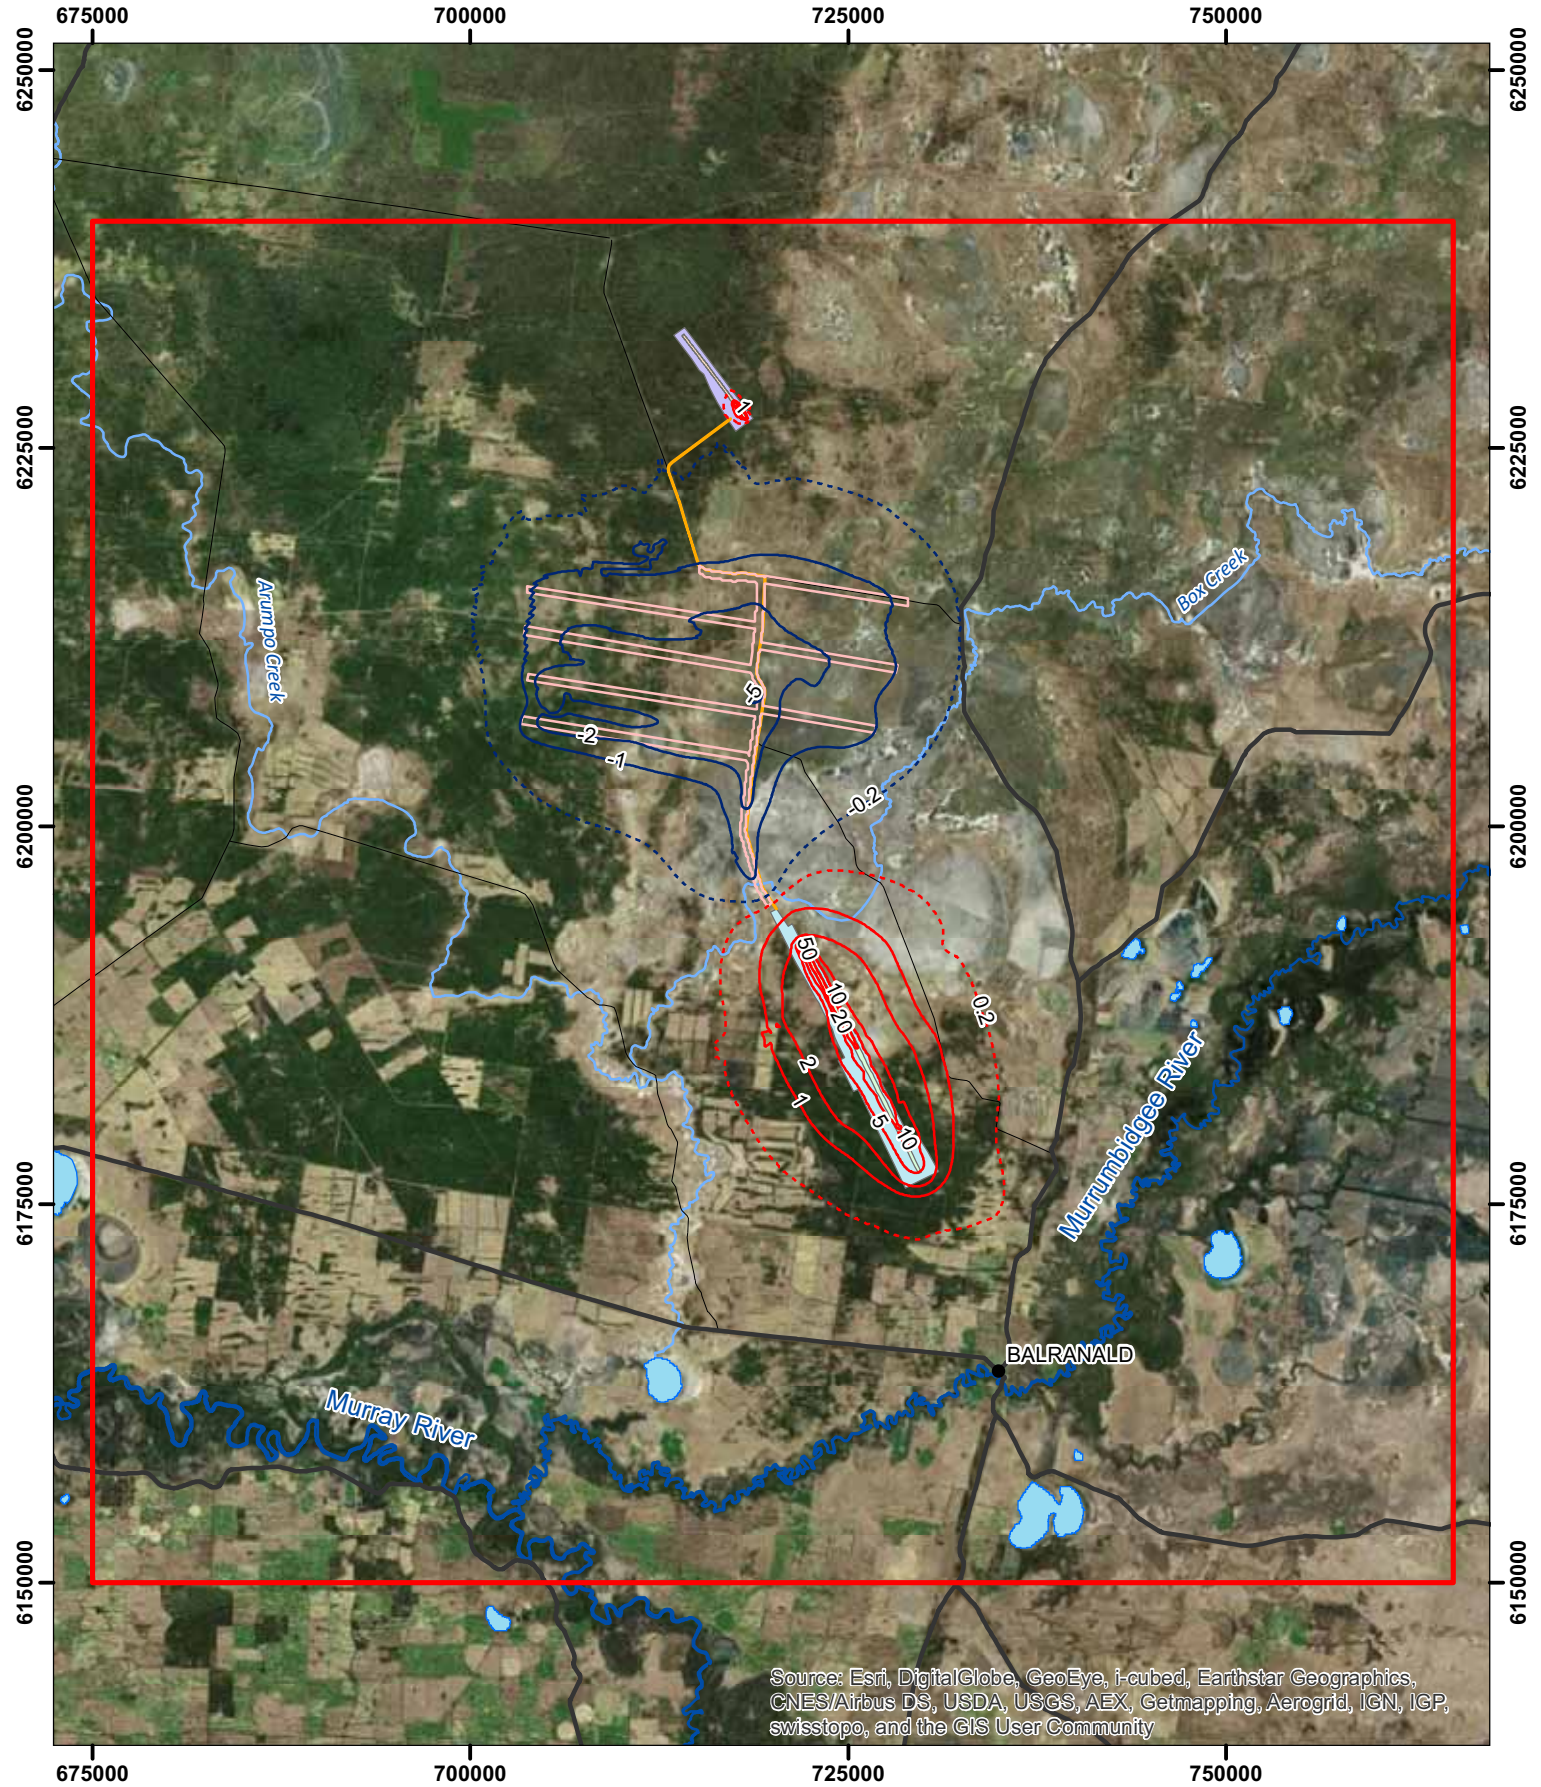

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 6.3



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 FS at mining year 6.3



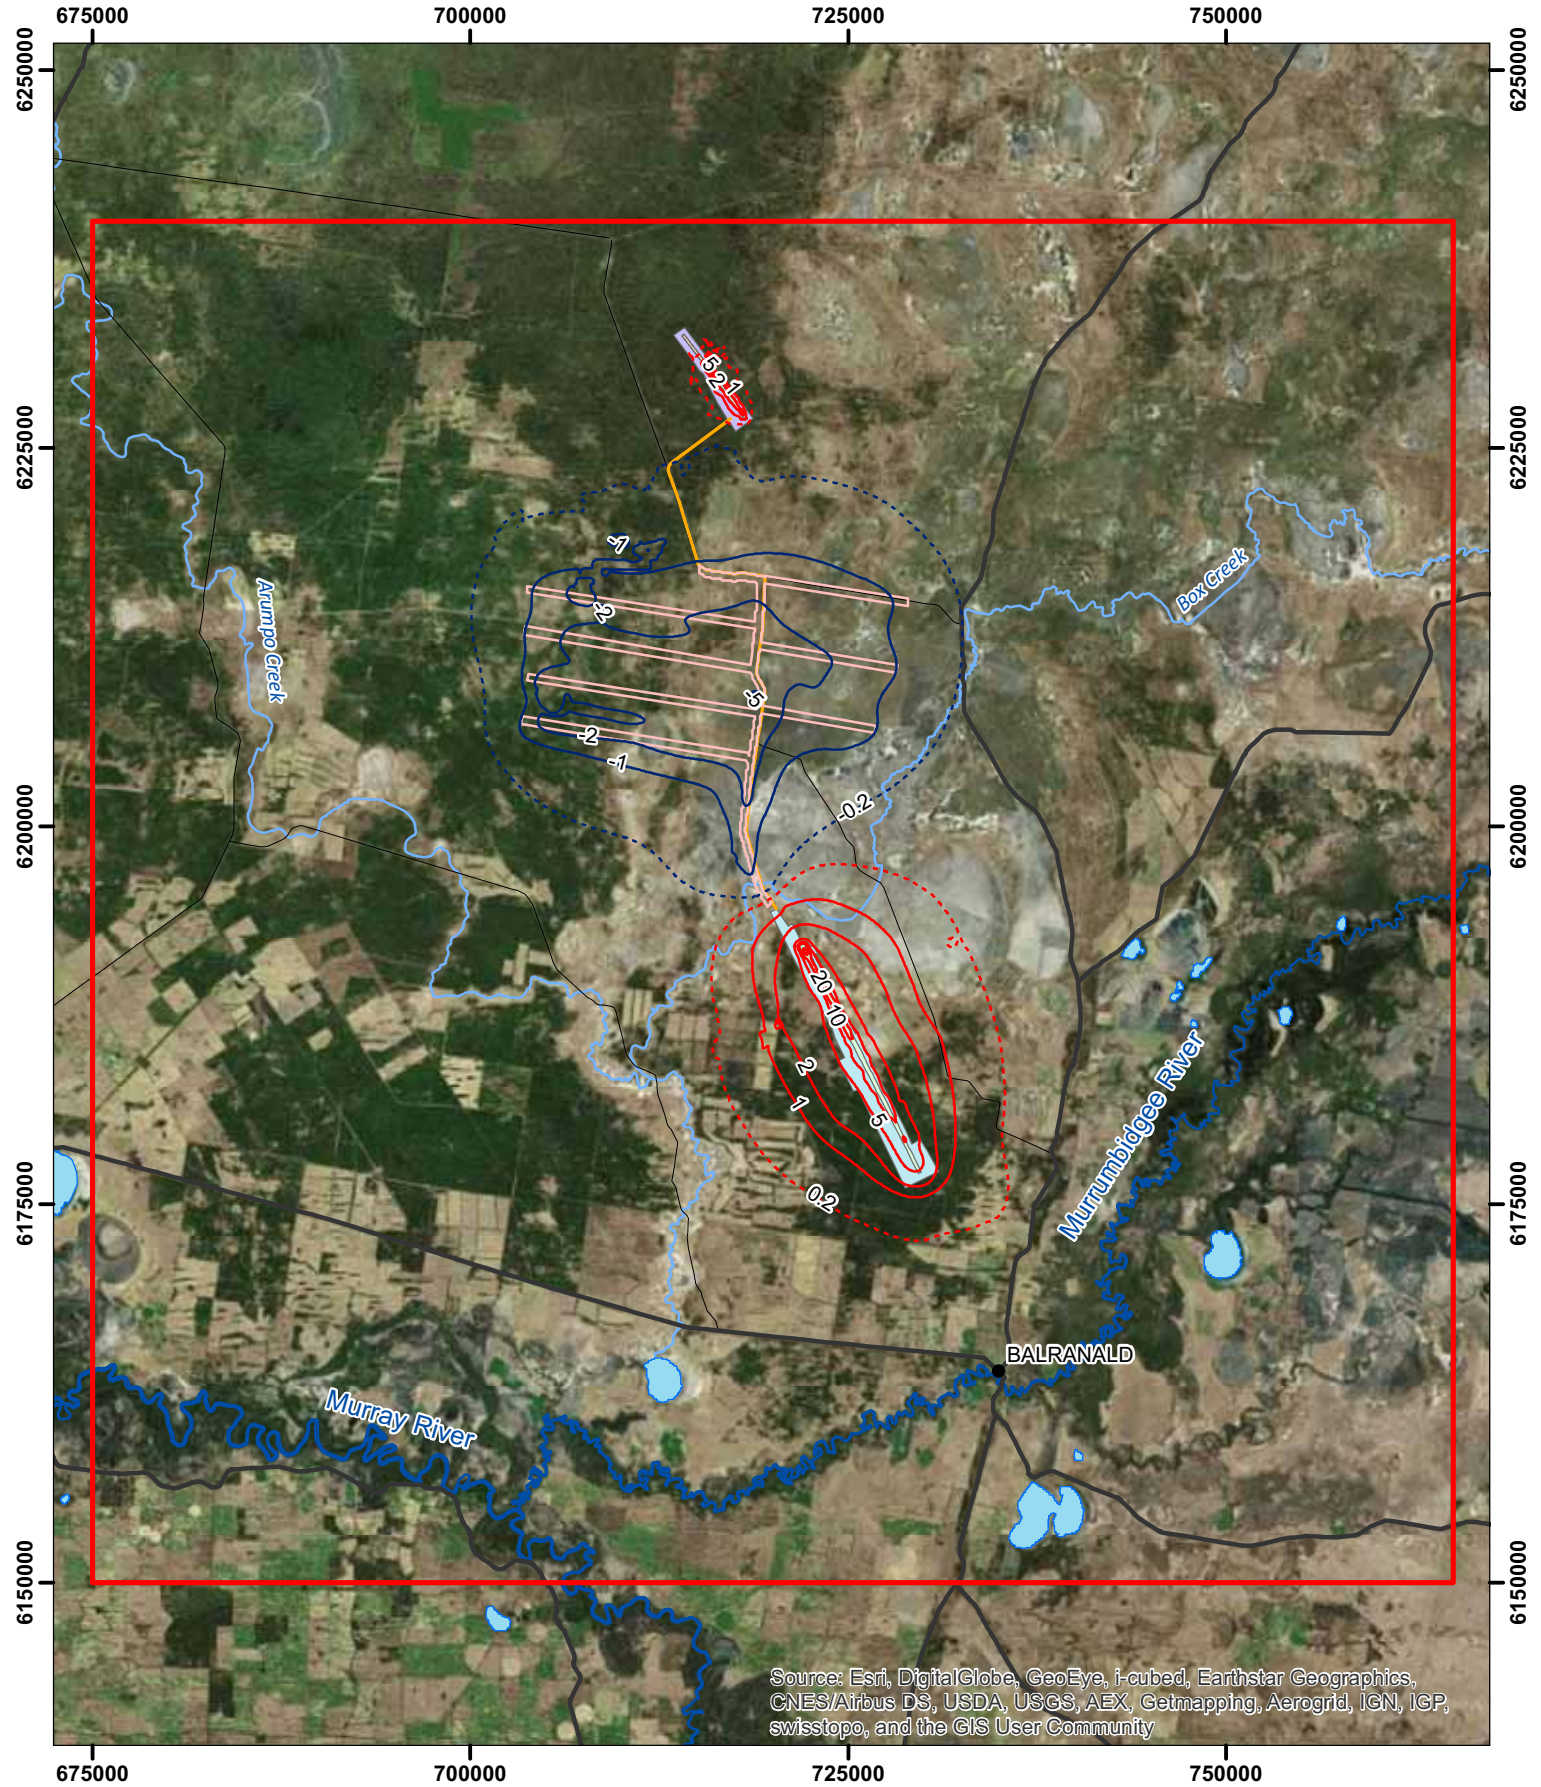

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain




GDA 1994 MGA Zone 54



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 7

I:\VESAI\Projects\I\VE23875\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20240101_L1_DD.mxd

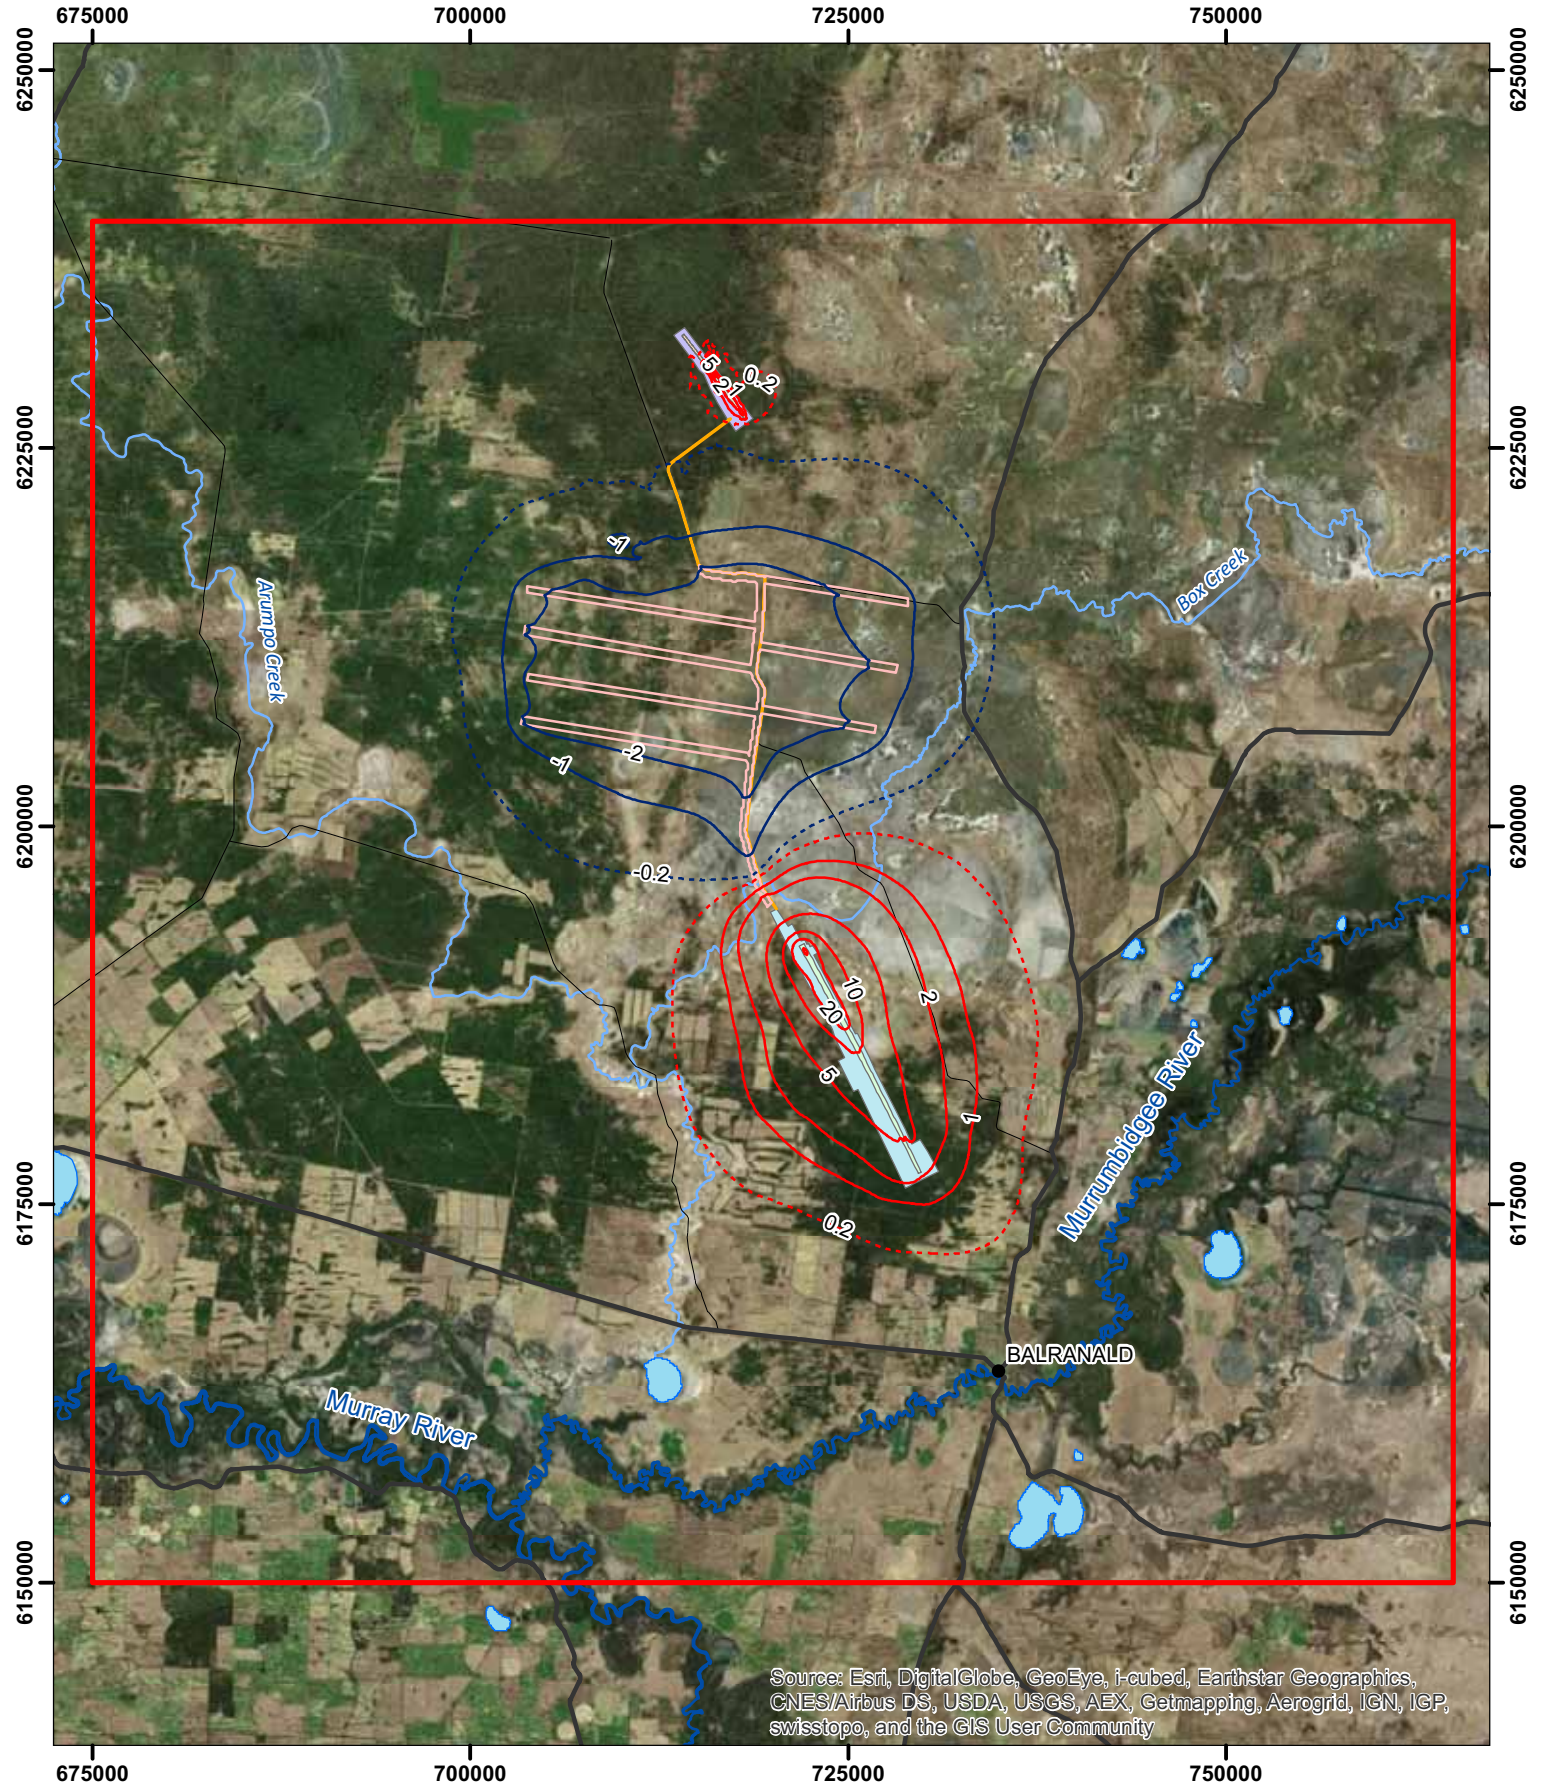

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 7





Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 7.4

I:\VESAI\Projects\I\VE23875\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20240601_L1_DD.mxd

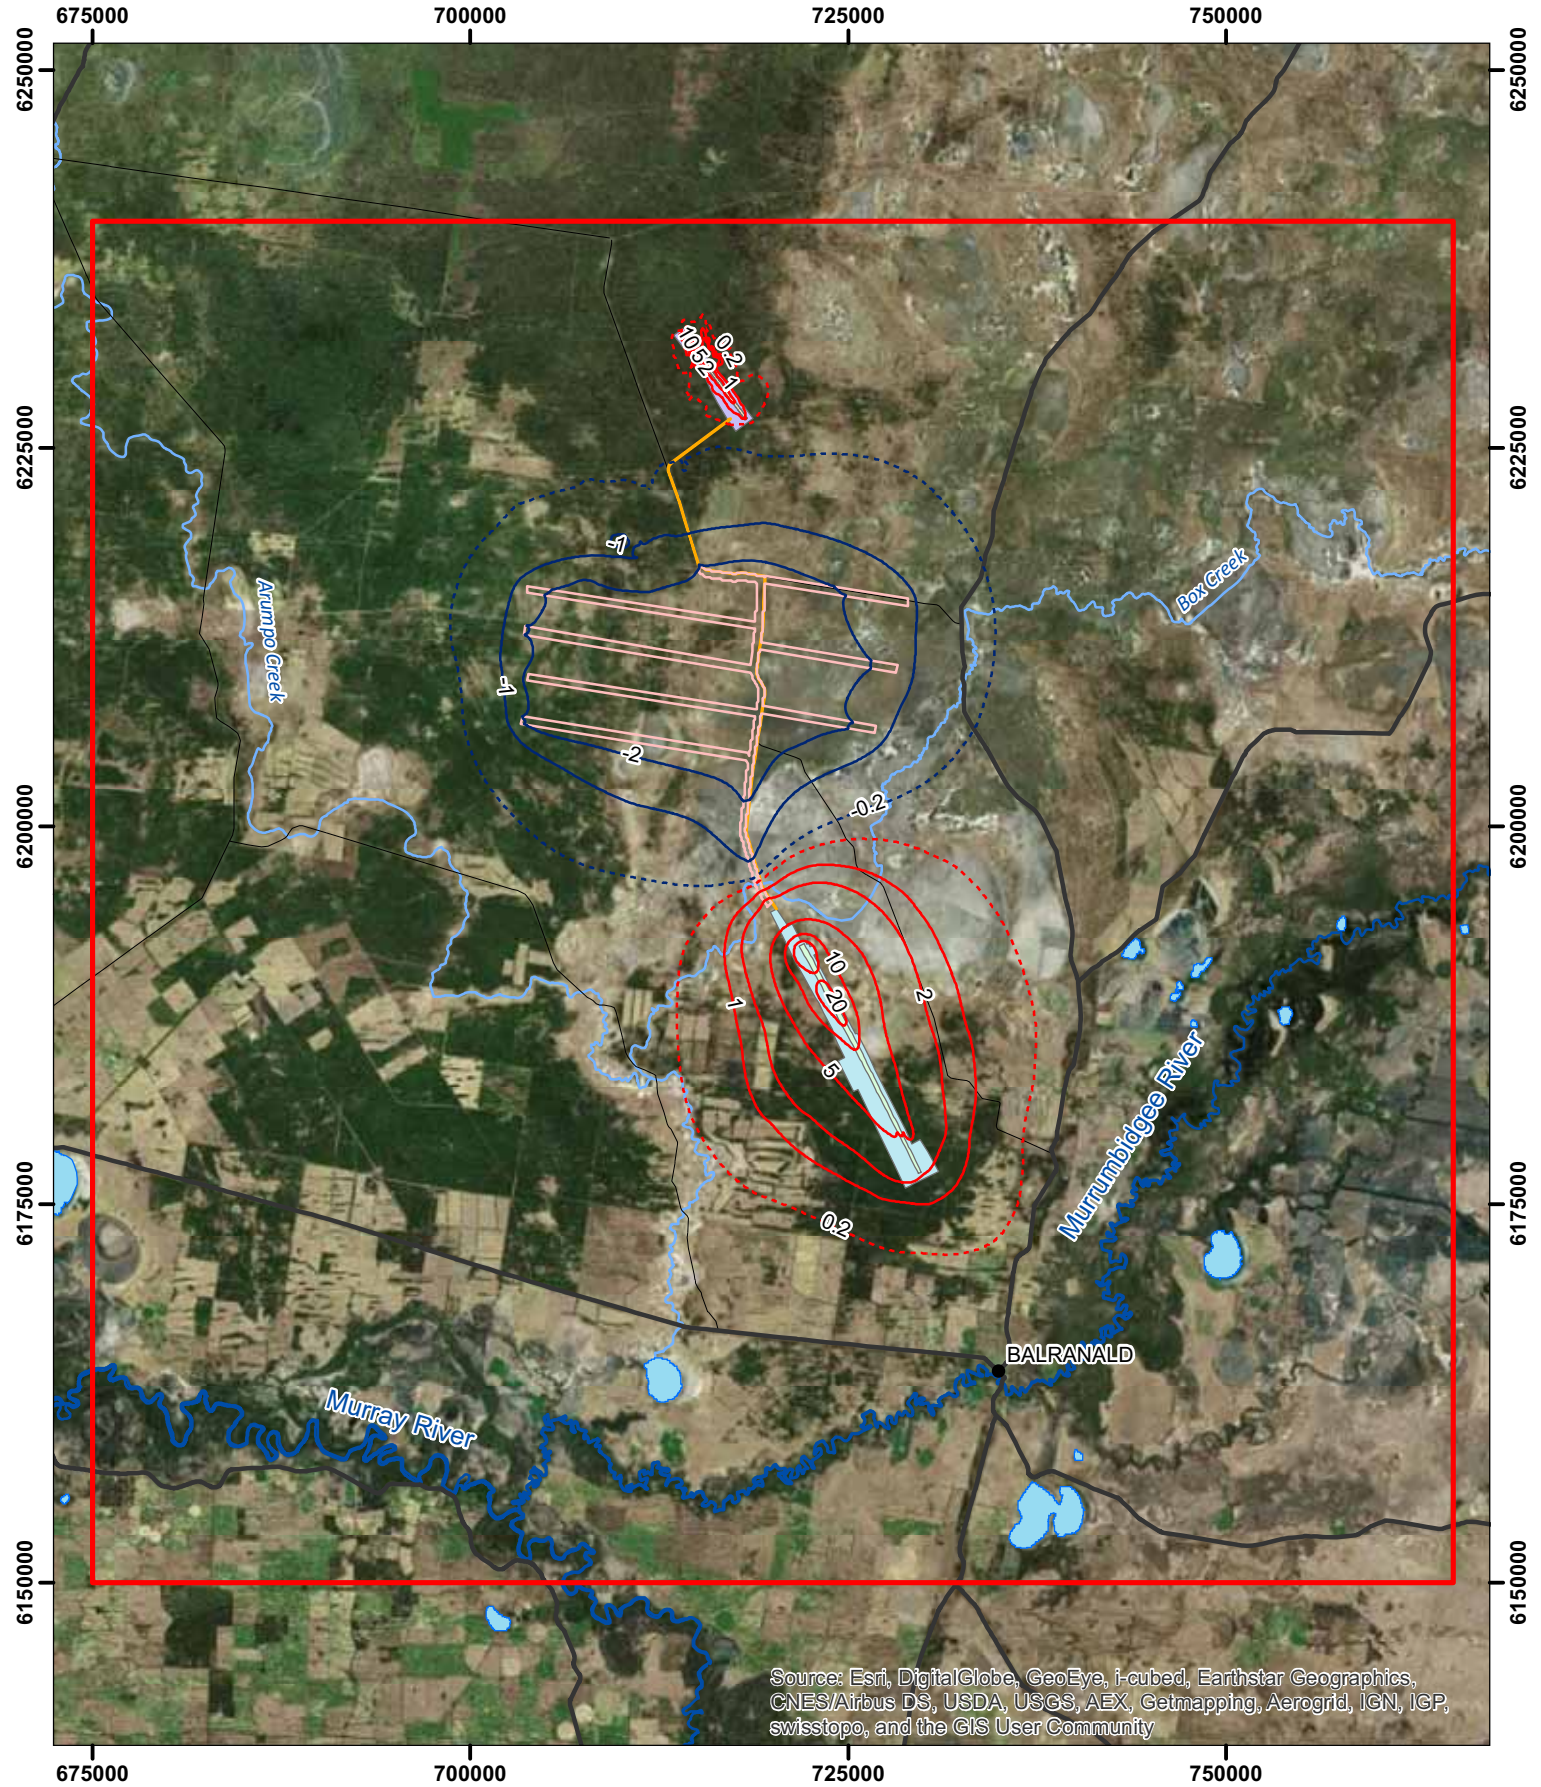

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 7.4



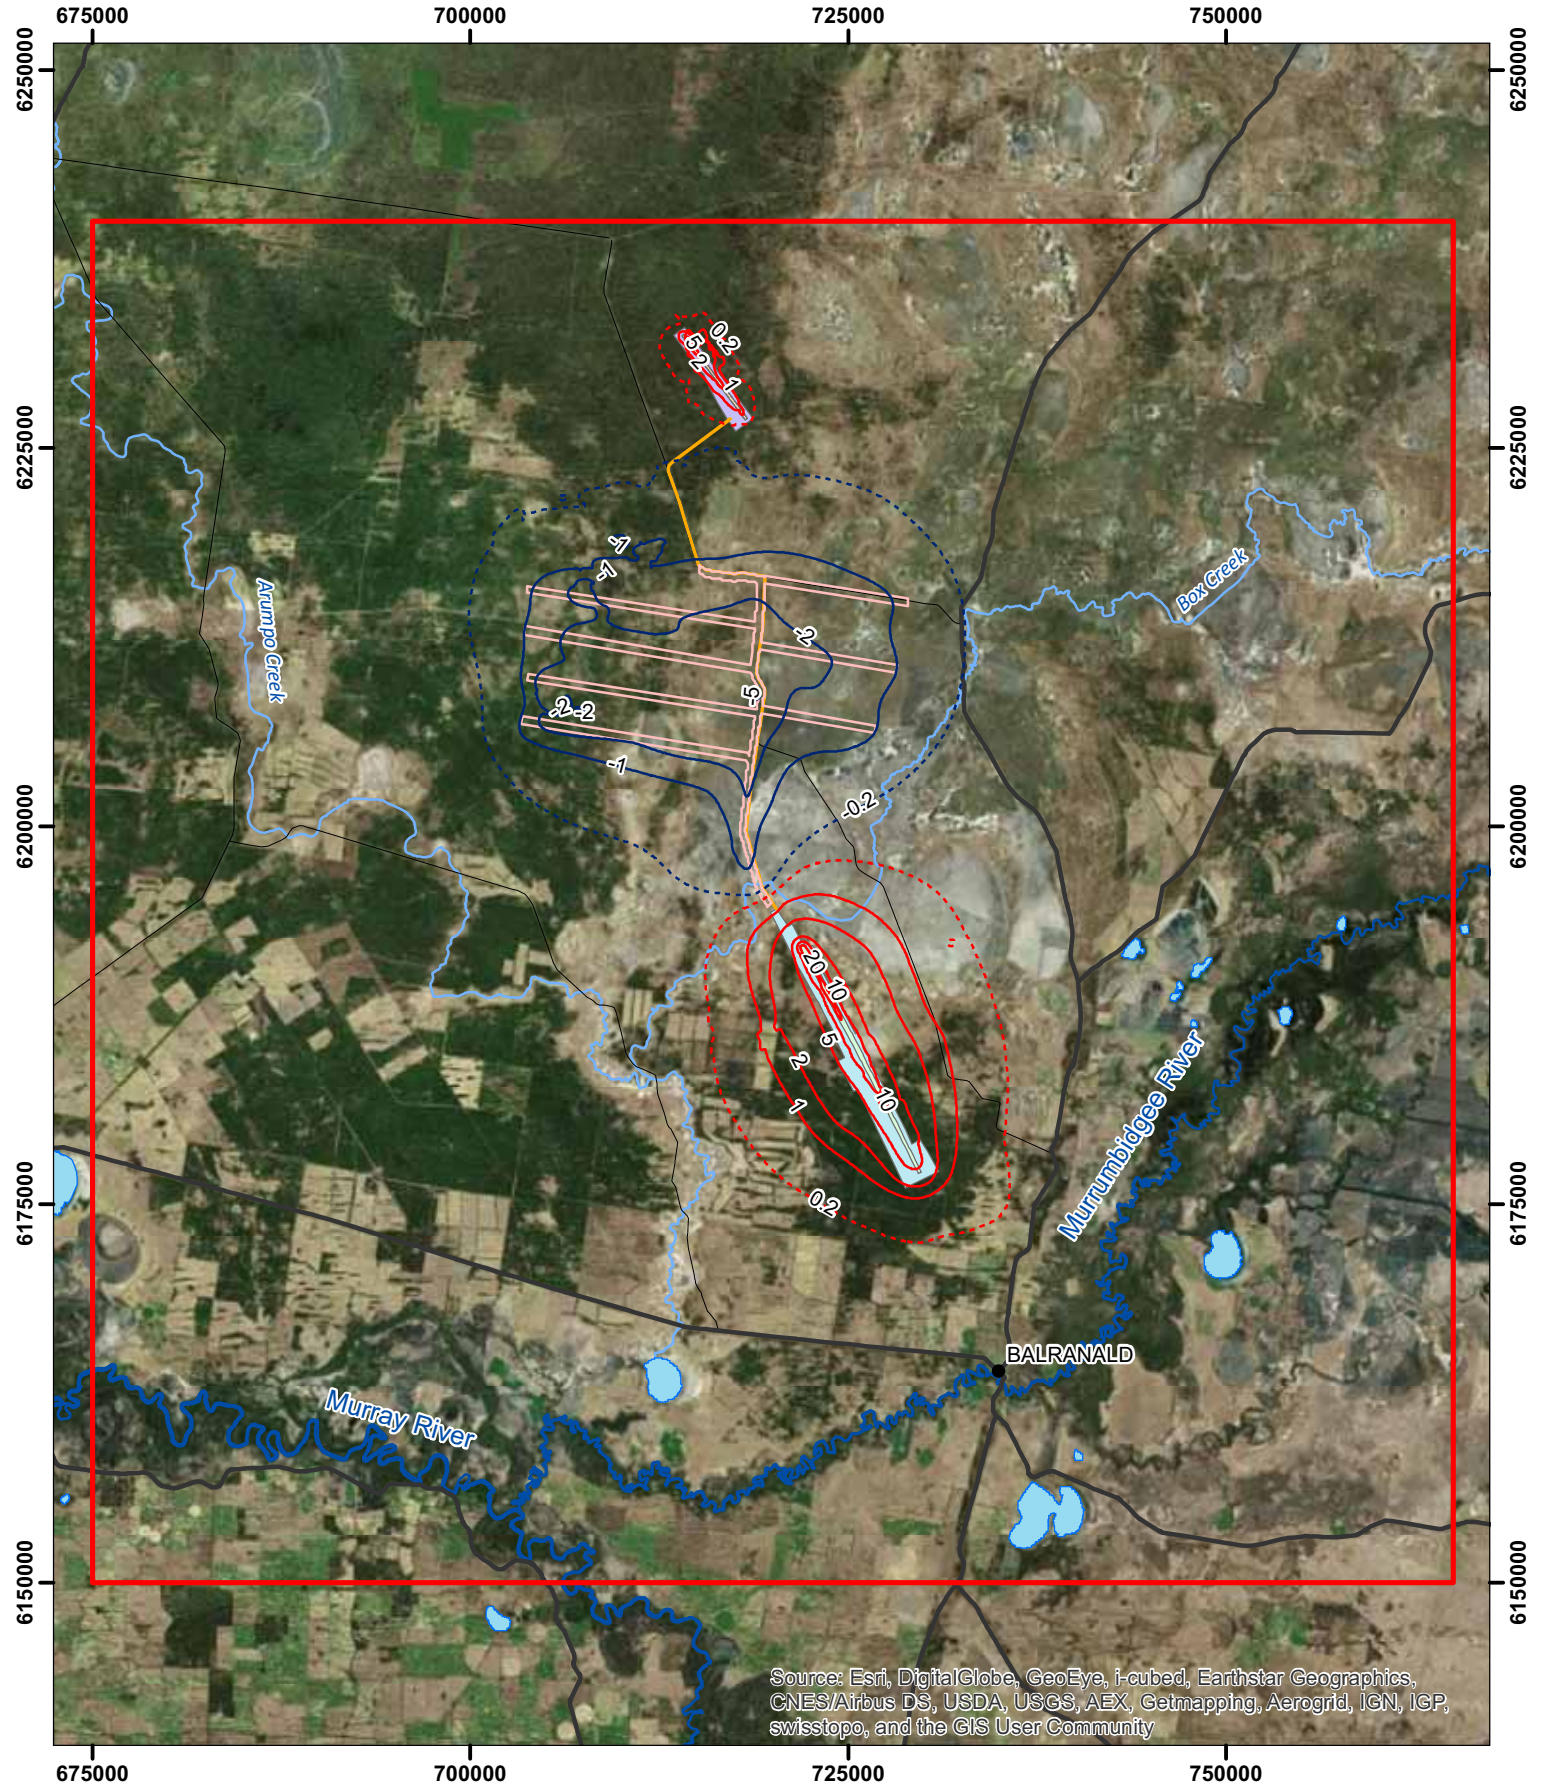


- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation at mining year 8

I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20250101_L1_DD.mxd

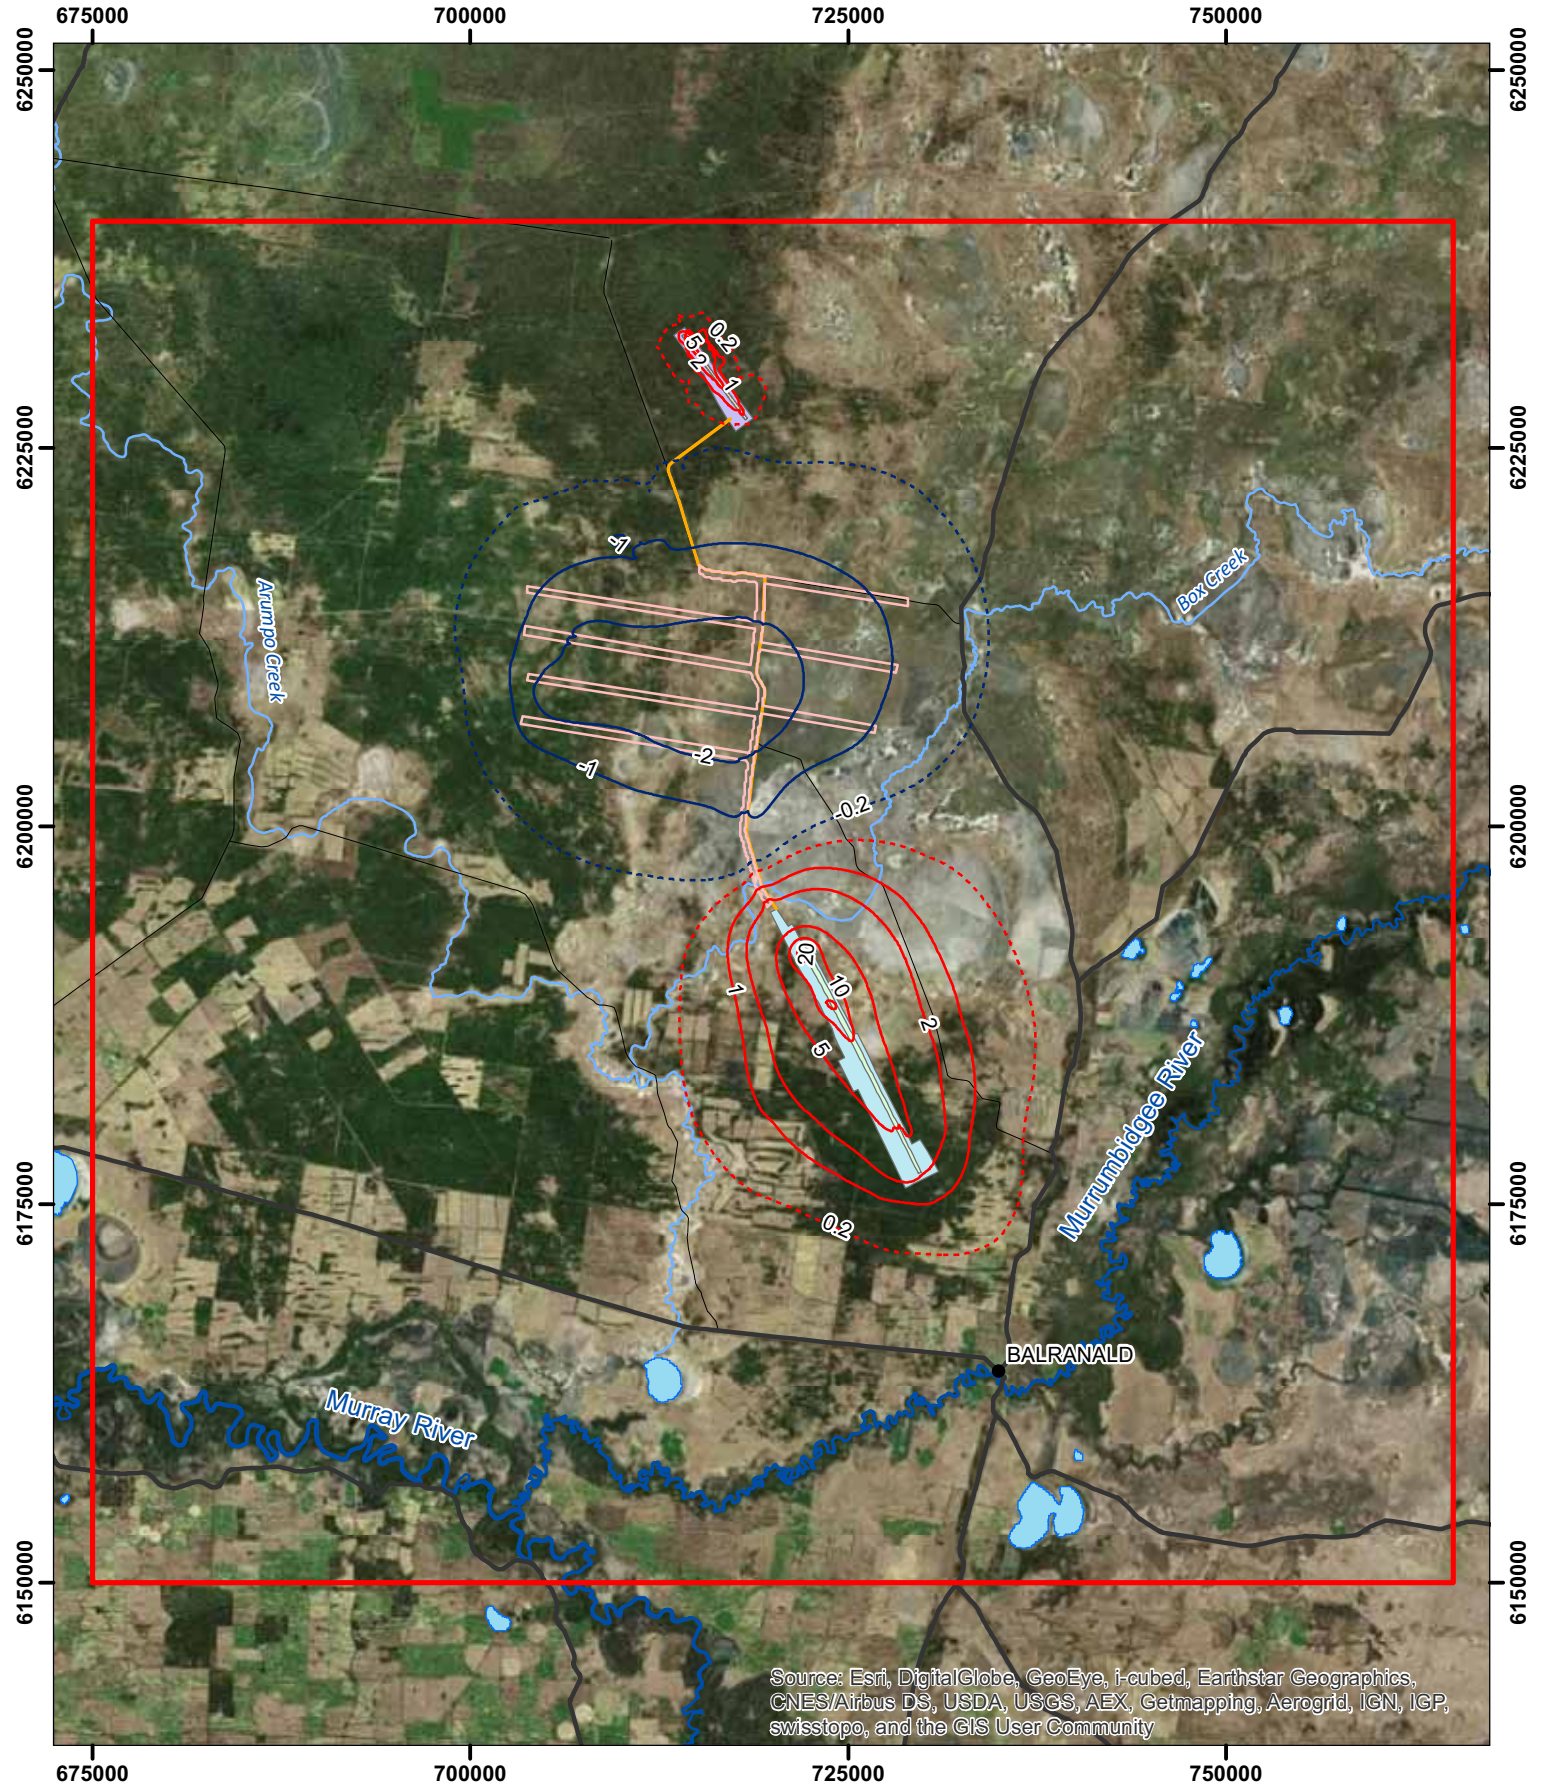

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore at mining year 8





Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain




BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation 1 year post-mining

I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20260101_L1_DD.mxd




- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore 1 year post-mining



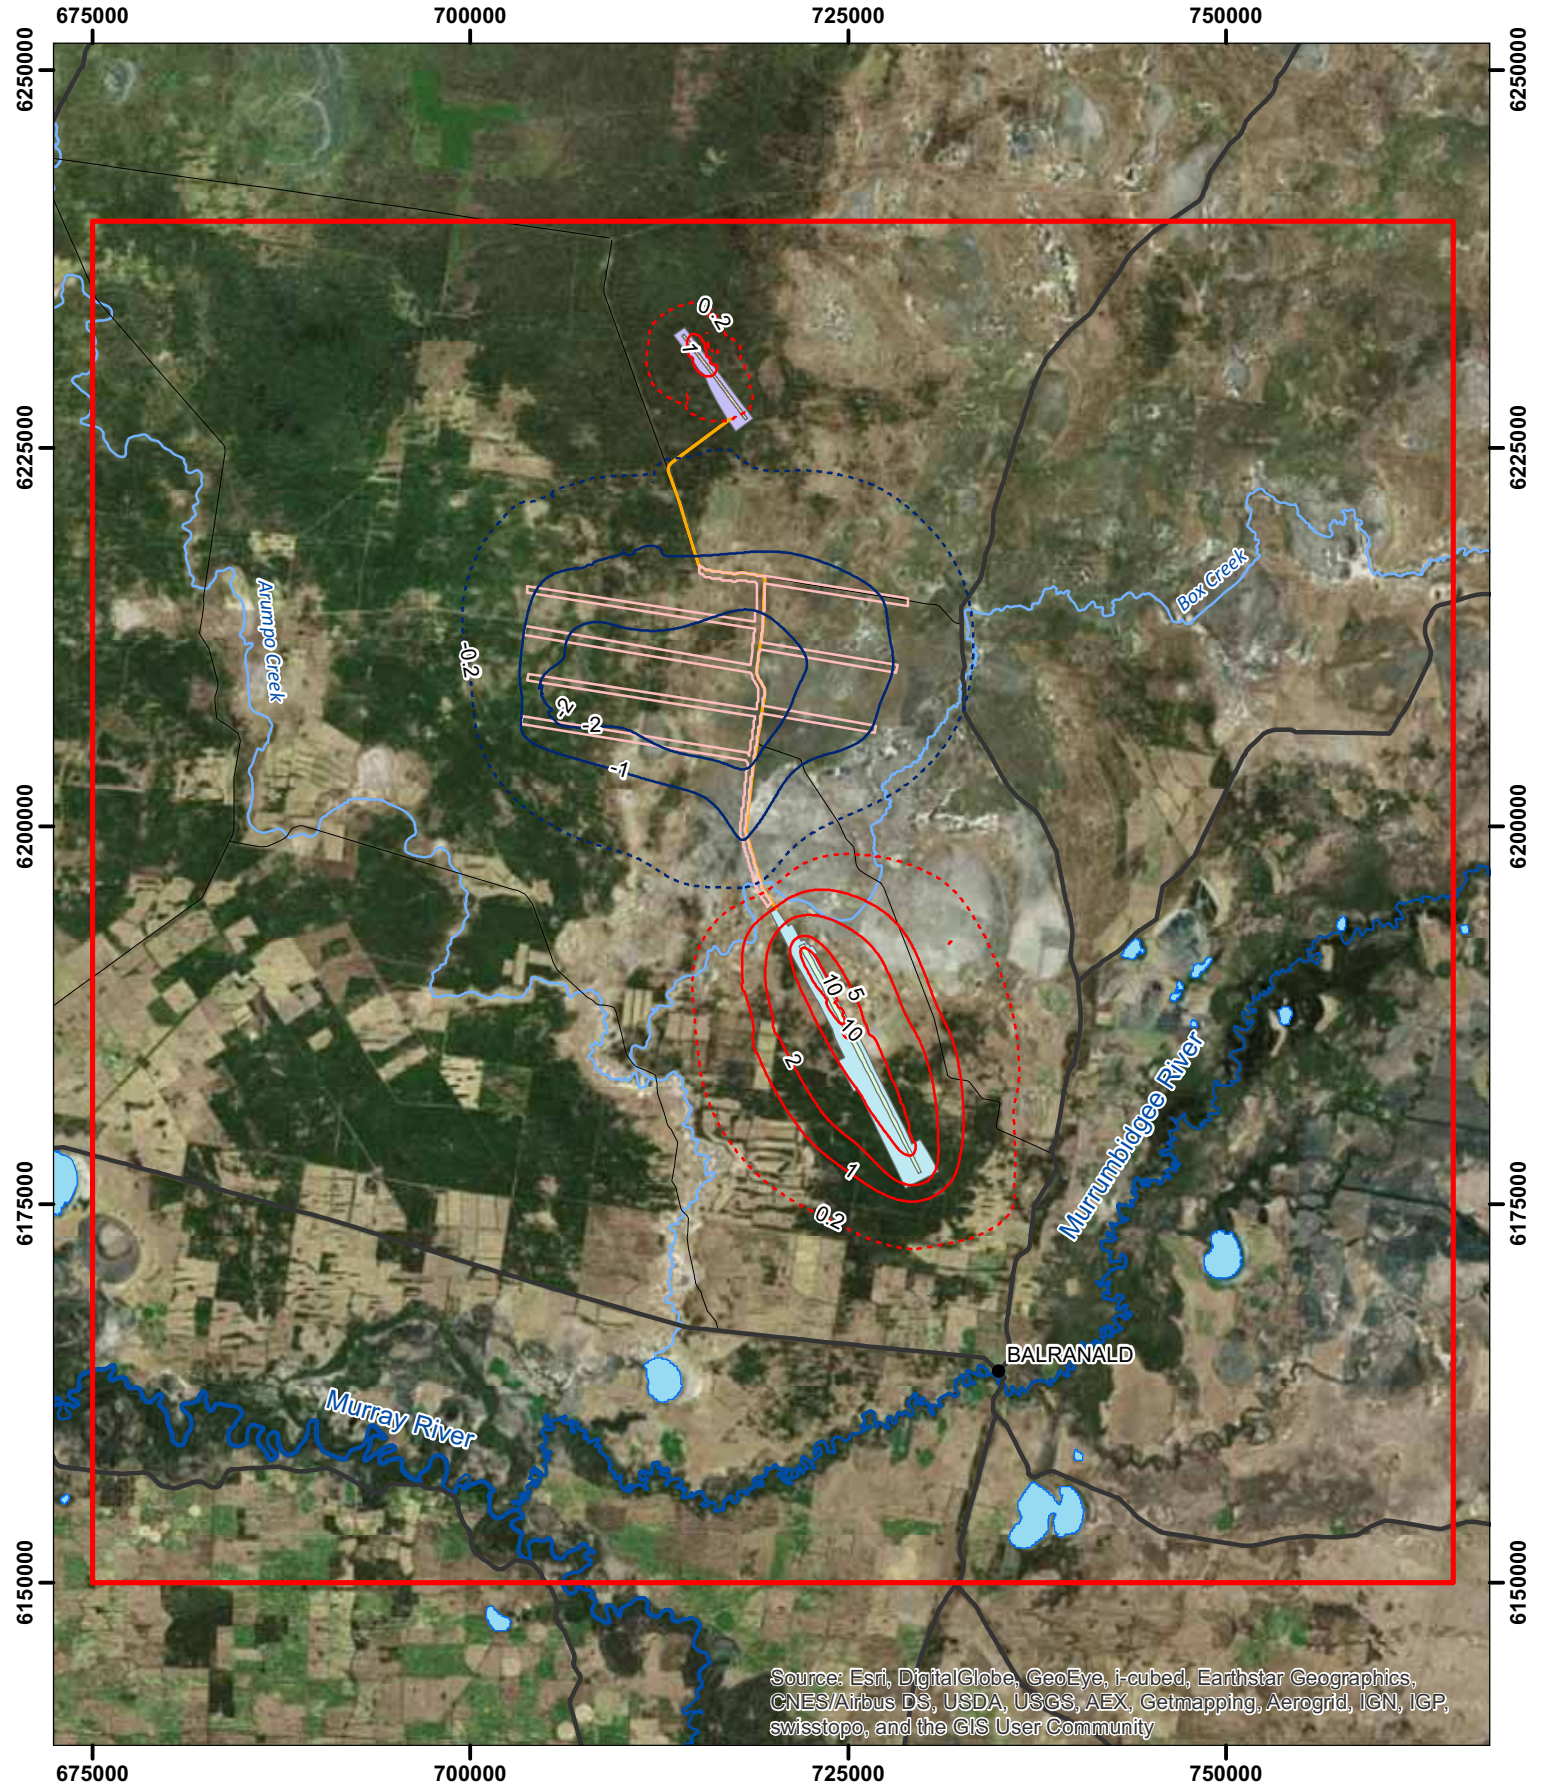

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation 5 years post-mining





Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore 5 years post-mining



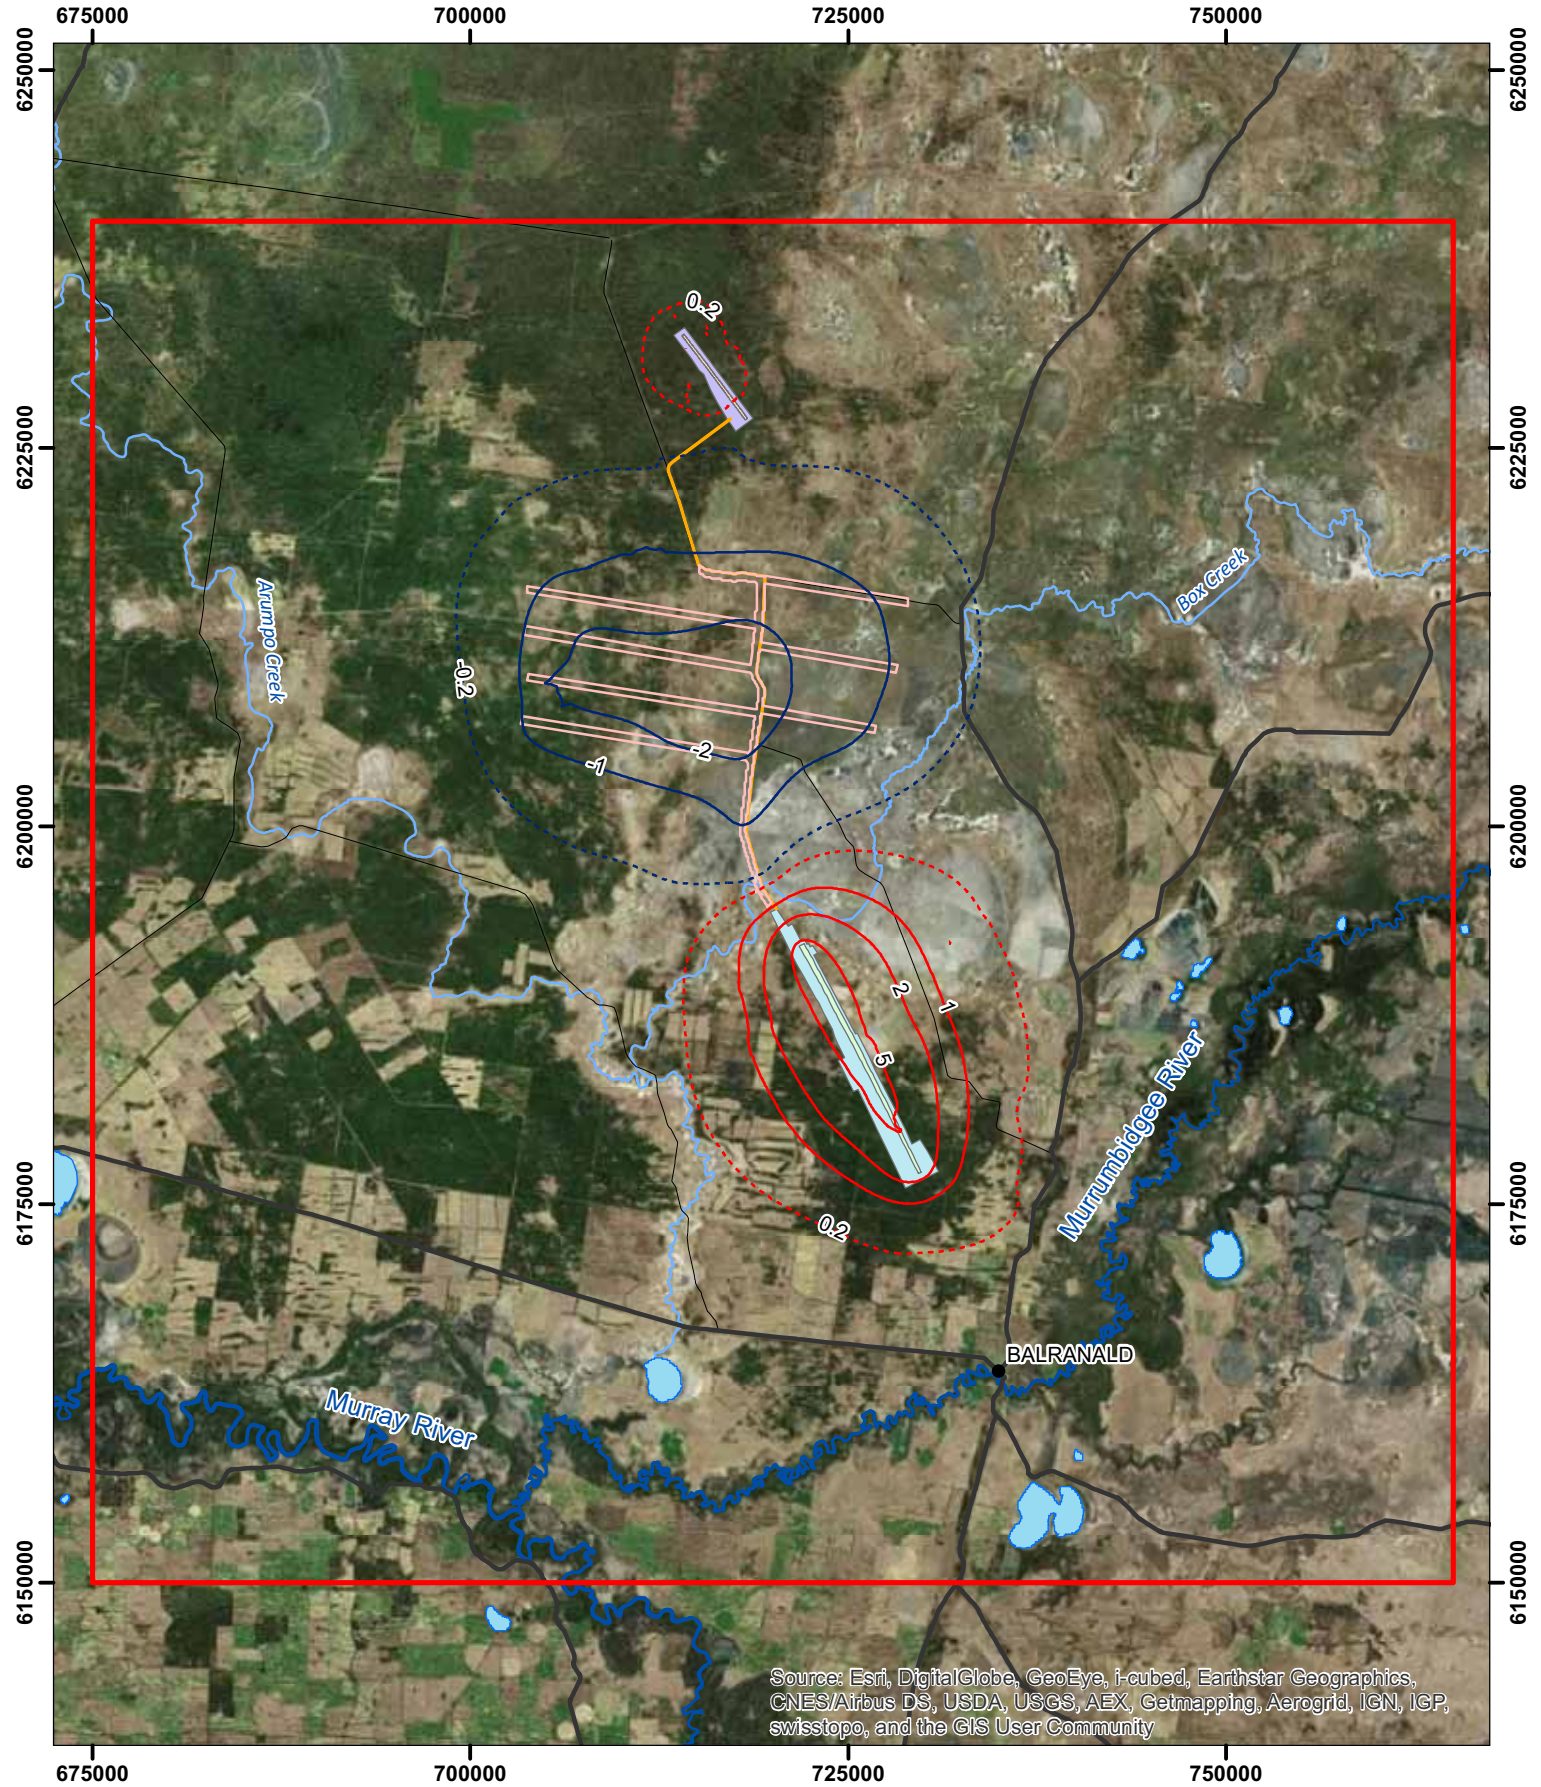

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation 10 years post-mining

I:\VESAI\Projects\I\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\Rev2\BAL2.0_TS2_opt29_20350101_L1_DD.mxd



Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore 10 years post-mining





Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community


GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation 30 years post-mining

I:\VESAI\Projects\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\BAL2.0_TS2_opt29_20550101_L1_DD.mxd

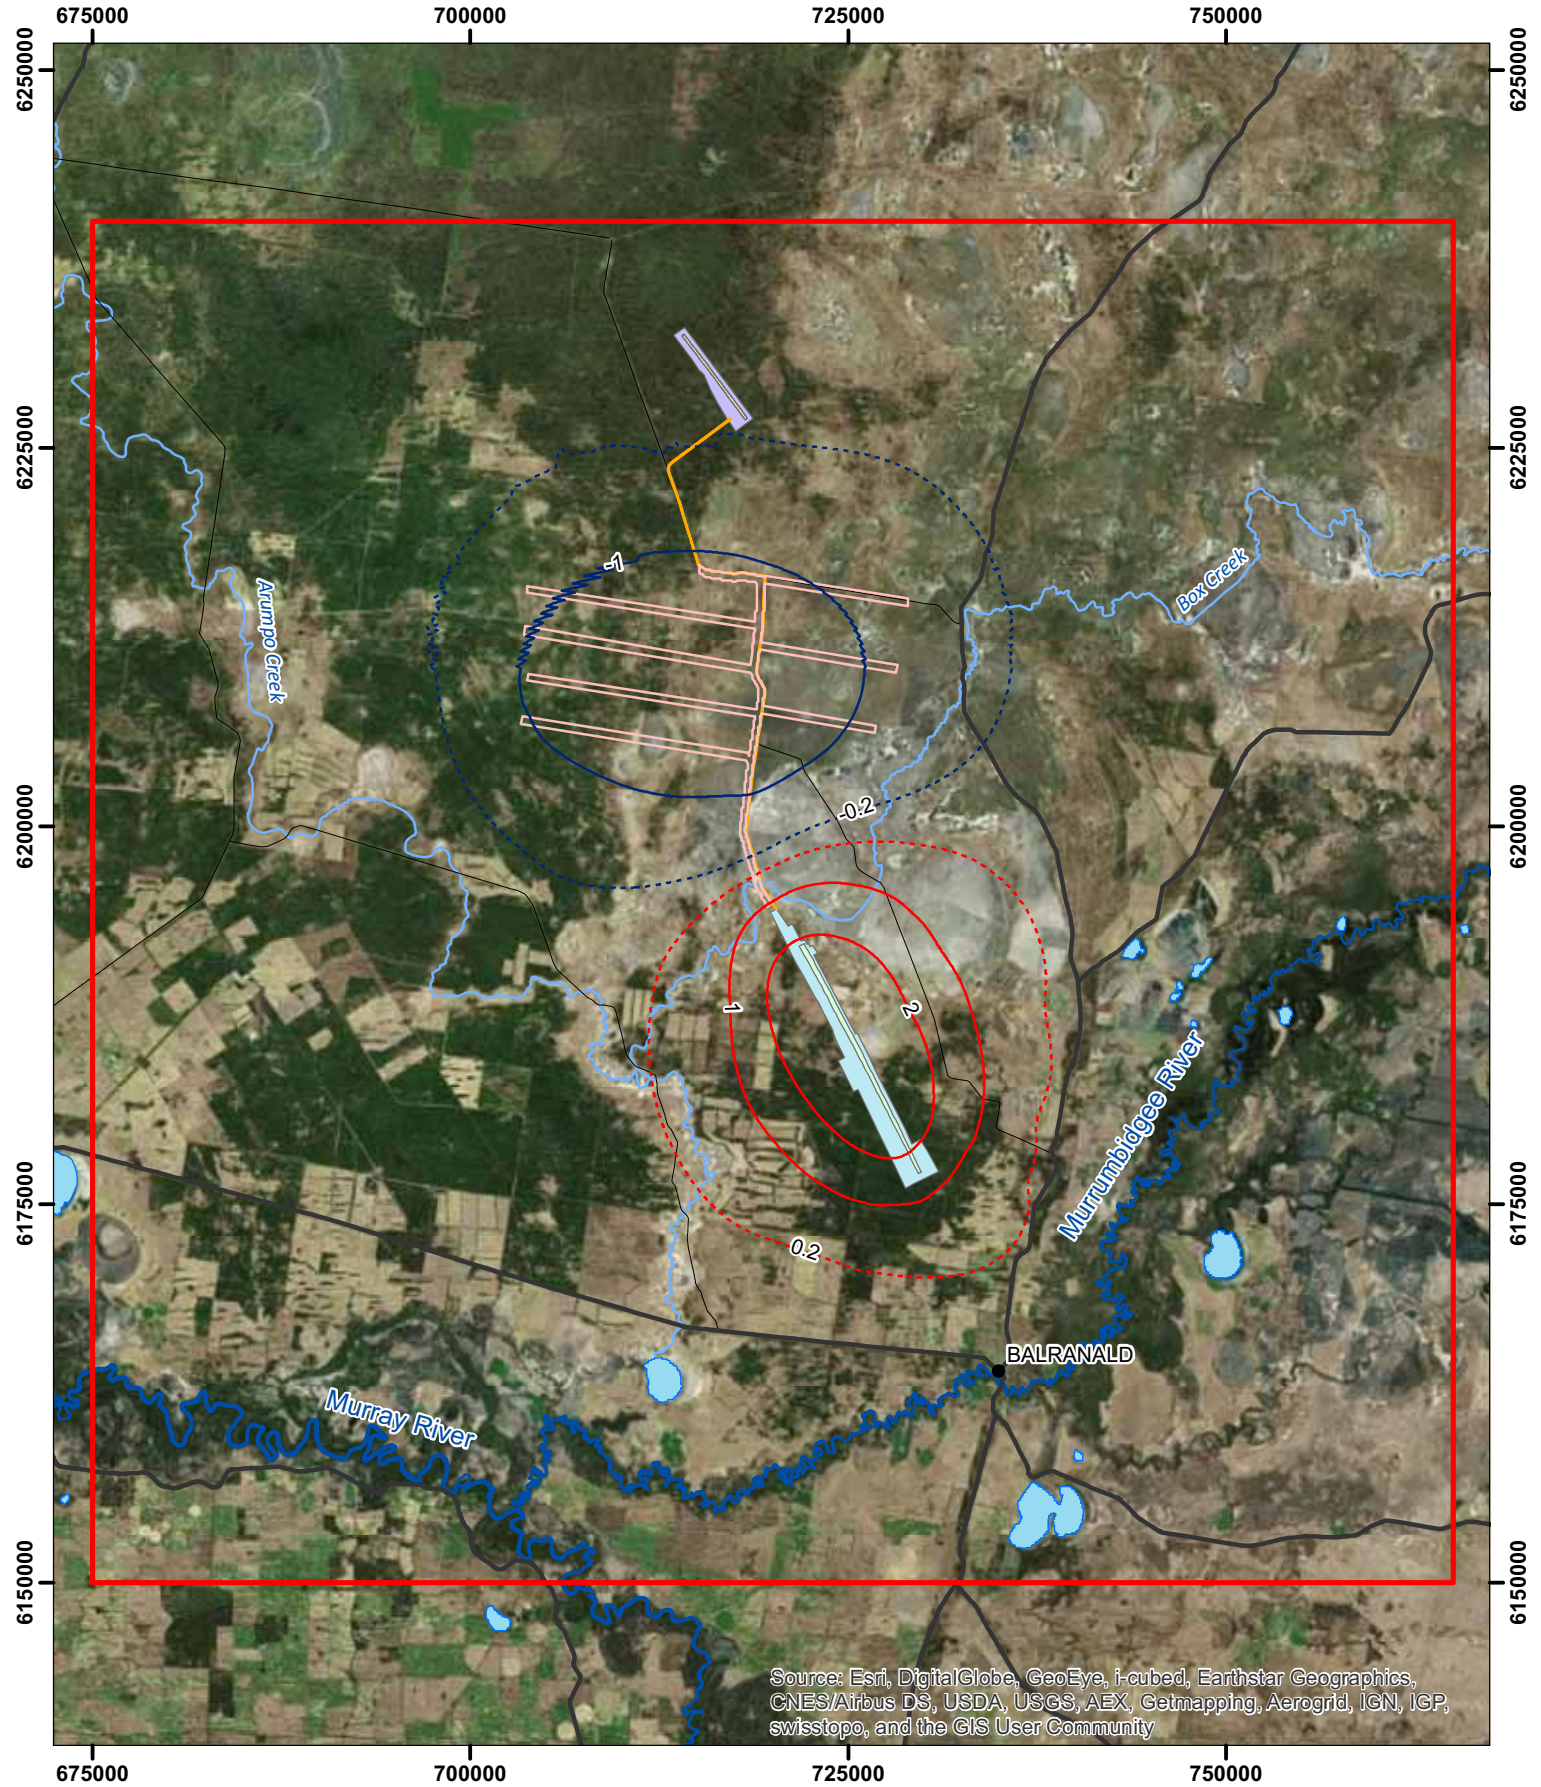

Source: Esri, DigitalGlobe, GeoEye, i-cubed, Earthstar Geographics, CNES/Airbus DS, USDA, USGS, AEX, Getmapping, Aerogrid, IGN, IGP, swisstopo, and the GIS User Community

GDA 1994 MGA Zone 54

- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in LPS1 foreshore 30 years post-mining



I:\VESAI\Projects\VE238751\Technical\Spatial\mxd\BAL2.0_TS2_opt29\Drawdown from 2014\BAL2.0_TS2_opt29_20550101_L3_DD.mxd



- Town
- Major road
- Minor Road
- Lake
- River
- Watercourse
- Haul road
- West Balranald pit limits
- West Balranald disturbance
- Nepean pit limits
- Nepean disturbance
- EIS offpath injection area
- Modelled drawdown (m)
- Modelled mounding (m)
- BAL2.0 model domain



BAL2.0 TS2 opt29 modelled drawdown in Shepparton Formation 100 years post-mining

